

AL-DINCH
SERRATION**AL-M**METRIC
SERRATION**High precision power chucks \varnothing 125 - 400 mm**

- Closed center
- Long stroke
- 2 and 3 jaws (4 jaws only \varnothing 400 mm)

**Application/customer benefits**

- For chucking parts
- Suitable for vertical machines
- Long clamping stroke (possibility to clamp 1st and 2nd operation with the same jaws)

AL-D: Master jaws with INCH SERRATION (1/16" x 90°, 3/32" x 90°)**AL-M:** Master jaws with METRIC SERRATION (1.5 mm x 60°)
(suitable for japanese chuck top jaws)**Technical features**

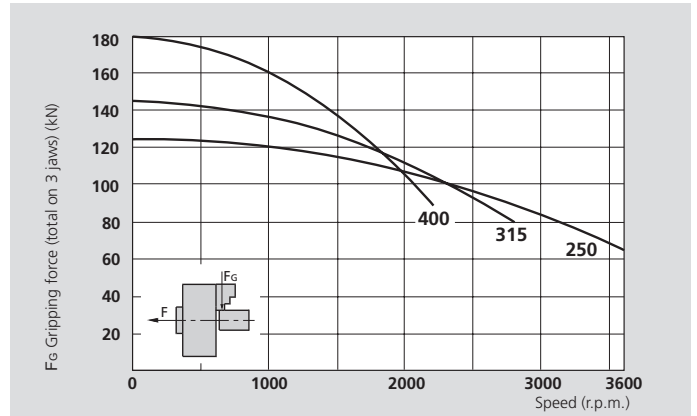
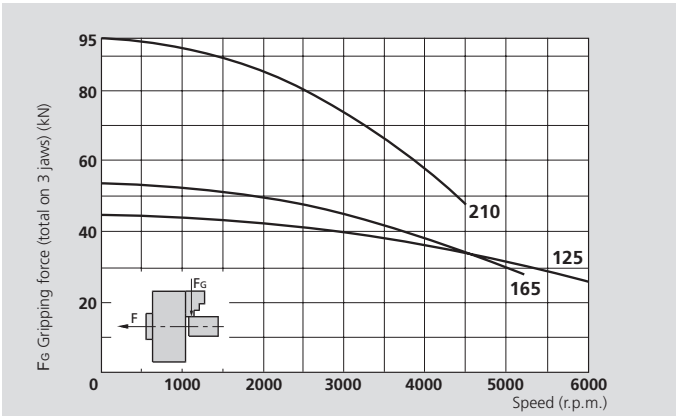
- Extra long jaw stroke
- Gripping force transmission via wedge hook
- Case hardened body to assure greatest precision and long chuck life

Standard equipment

- 2, 3 or 4 jaw chuck
- 1 set T-nuts with bolts
- 1 set soft top jaws
- Mounting bolts

Ordering example

- 3 jaw chuck AL-D 210 / A6
- or
- 2 jaw chuck AL-M 250 / Z220

Actual gripping force diagrams

The data in the diagrams refer to 3 jaw chucks, newly maintained according to their service manuals using SMW-AUTOBLOK K05 grease. The static and dynamic gripping forces have been measured using standard soft top jaws, placed in a position not exceeding the outer diameter of the chuck.


△ Safety advice / danger of damage:

When using taller / heavier jaws and / or clamping on a bigger diameter reduce draw pull / rotating speed accordingly.

Technical data

SMW-AUTOBLOK Type		AL-D 125 AL-M 125		AL-D 165 AL-M 165		AL-D 210 AL-M 210		AL-D 250 AL-M 250		AL-D 315 AL-M 315		AL-D 400 AL-M 400		
Number of jaws		2	3	2	3	2	3	2	3	2	3	2	3	4
Radial jaw stroke	mm	6		7		8.5		10		12		13		
Axial piston stroke	mm	15		17		21		25		30		33		
Max. draw pull*	kN	17	25	20	30	35	53	45	68	54	80	67	100	100
Max. gripping force*	kN	30	45	36	54	63	95	83	125	97	145	120	180	180
Max. speed	r.p.m.	6000		5200		4500		3600		2800		2000		
Weight (without top jaws)	kg	5.5		9.5		19		32		56		84		
Moment of inertia	kg·m ²	0.011		0.032		0.105		0.26		0.69		1.6		
Recommended actuating cylinders	Type	SIN-S 85 / 100		SIN-S 100		SIN-S 100 / 125		SIN-S 125 / 150		SIN-S 125 / 150		SIN-S 150 / 175		

* For internal clamping reduce the draw pull by 30%.

SMW-AUTOBLOK
438SMW-AUTOBLOK
440SMW-AUTOBLOK
297

High precision power chucks \varnothing 125 - 400 mm

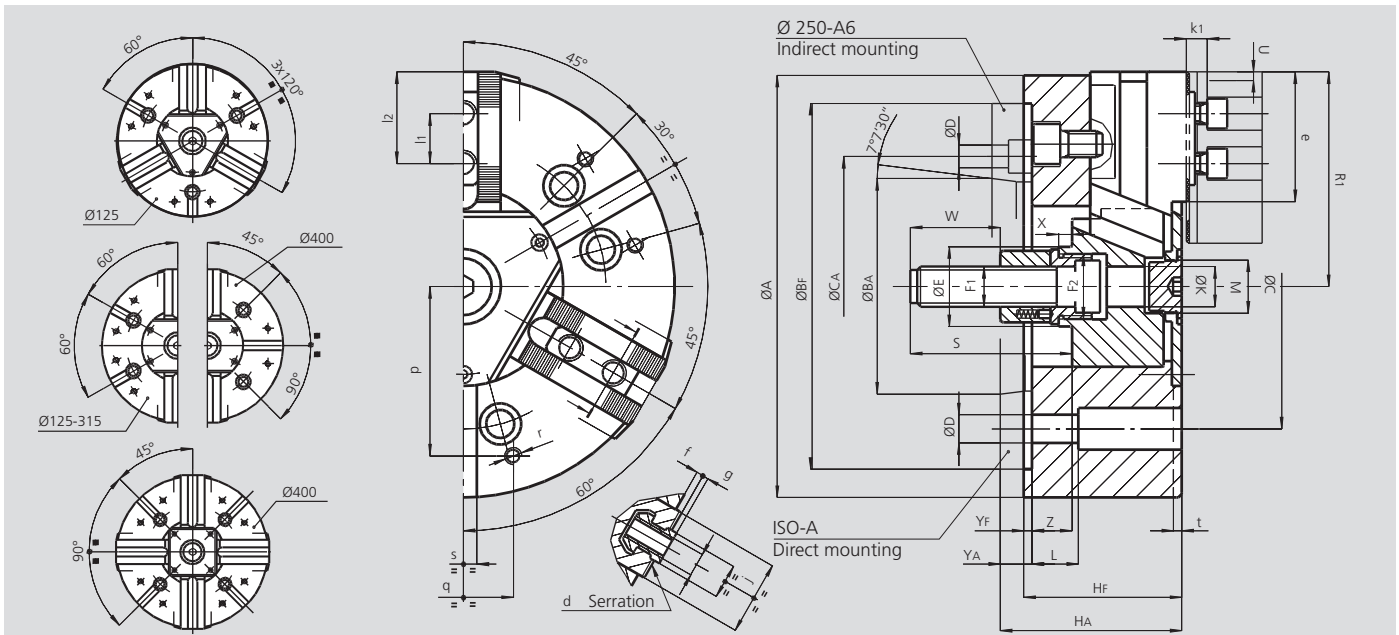
AL-D

AL-M

- Closed center
- Long stroke
- 2 and 3 jaws (4 jaws only \varnothing 400 mm)

INCH
SERRATION

METRIC
SERRATION



Subject to technical changes.
For more detailed information please ask our customer service.

SMW-AUTOBLOK Type			AL-D 125 AL-M 125		AL-D 165 AL-M 165		AL-D 210 AL-M 210		AL-D 250 AL-M 250			AL-D 315 AL-M 315		AL-D 400 AL-M 400	
Mounting			Z115	A4	Z140	A5	Z170	A6	Z220	A6	A8	Z220	A8	Z300	A11
	A	mm	127		165		210		254			315		390	
	BF/BAH6	mm	115	63.513	140	82.563	170	106.375	220	106.375	139.719	220	139.719	300	196.869
	C	mm	82.6		104.8		133.4		171.4			171.4		235	
	CA	mm	-	-	-	-	-	-	133.4			-	-	-	-
	D	mm	11.5		11.5		13.5		17			17		21	
	E	mm	25		32		41		47			47		86	
	F1	mm	M12 x 1.25		M16		M20		M24			M24		M24	
	F2	mm	M18 x 1.5		M24 x 2		M32 x 1.5		M38 x 1.5			M38 x 1.5		M75 x 2	
	HF/HA	mm	59	67	71	81	85	97	95	114	109	105	119	116	131
	K	mm	9		17		20		25			25		65	
	L	mm	32		23		32		28			38		54	
	M	mm	M16 x 1.5		M24 x 1.5		M32 x 1.5		M32 x 1.5			M38 x 1.5		M68 x 2	
Chuck open	R1	mm	67		86		109		133			164		202	
Jaw stroke	S	mm	77		104		97		103			103		105	
	U	mm	6		7		8.5		10			12		13	
	W	mm	40		52		55		60			60		60	
	X	mm	12		17		8		8			8		8	
	YF/YA	mm	5	13	5	15	5	17	5	24	19	5	19	6	21
Max. / min.	Z	mm	15 / 0		17 / 0		21 / 0		24 / -1			30 / 0		33 / 0	
AL-D	d	inch	1/16" x 90°		1/16" x 90°		1/16" x 90°		1/16" x 90°			1/16" x 90°		3/32" x 90° ⁽¹⁾	
AL-M	d	mm	1.5 x 60°		1.5 x 60°		1.5 x 60°		1.5 x 60°			1.5 x 60°		1.5 x 60°	
	e	mm	37		49		61		77			99		116	
	f	mm	3		4		3		4			4		6	
	g	mm	2.5		2.5		3		3.5			3.5		3.5	
	j	mm	26		30		36		45			45		62	
	k1	mm	10		10		11		12			12		14	
AL-D	l1	mm	16		16.5		23		30			30		38	
AL-M	l1	mm	16		20		25		30			30		38	
Max. / min.	l2	mm	30 / 23		40 / 24		50 / 33		62 / 43			84 / 43		90 / 49	
AL-D	m	mm	M8		M10		M12		M16			M16		M20	
AL-M	m	mm	M8		M10		M12		M12			M16		M20	
AL-D	n h8	mm	12		14		17		21			21		25.5	
AL-M	n h8	mm	12		12		14		16			21		22	
	p	mm	52		65		80		102			120		150	
	q	mm	30		36		45		60			60		80	
	r	mm	M6		M8		M8		M10			M10		M12	
	s	mm	12		16		16		16			16		20	
	t	mm	5		5		5		5			5		5	

⁽¹⁾ Serration 1/16 x 90° on request.