


- Stahl, Aluminium oder Guss
- Vorbereitet oder feinstgefräst

Technische Änderungen vorbehalten.

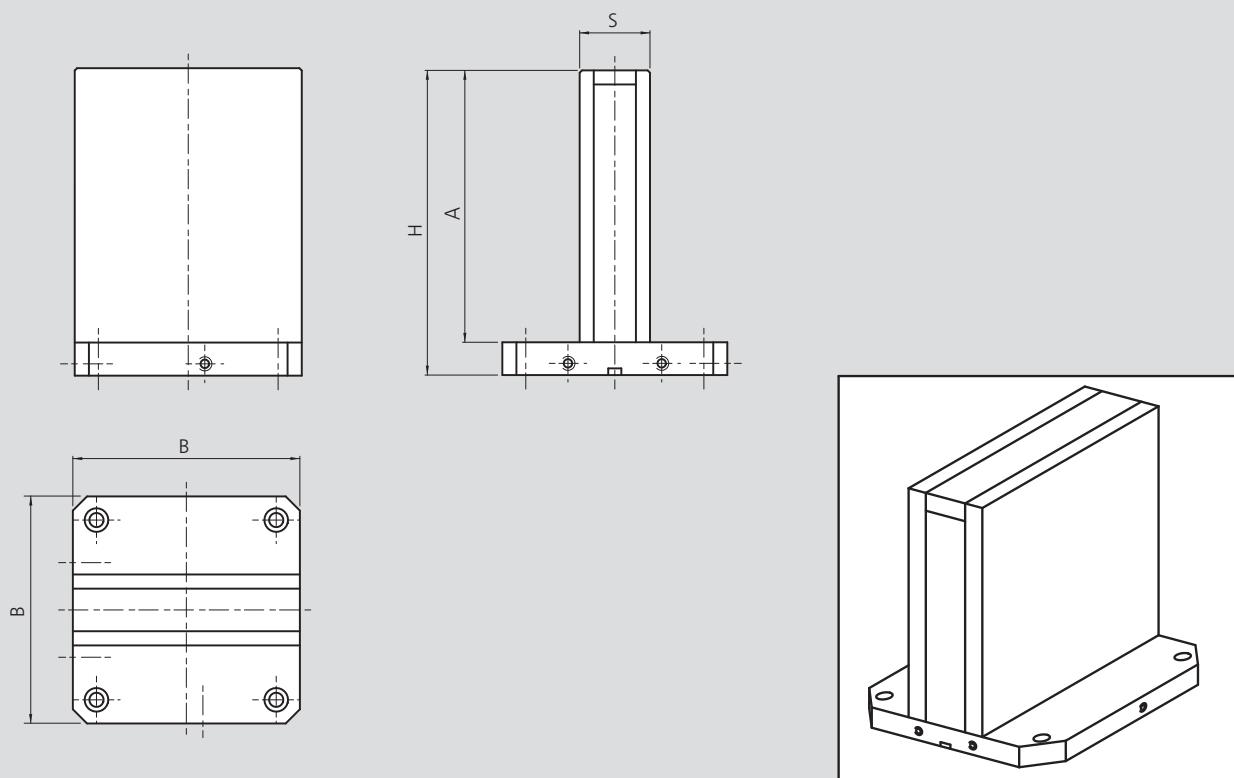

Doppelwinkel – STAHL

Vorbearbeitet Id.-Nr.	Feinstgefräst Id.-Nr.	A [mm]	B [mm]	H [mm]	S [mm]	Gewicht [kg]
57009026	57009025	620	400	660	150	212
57009046	57009045	660	500	700	150	287
57009066	57009065	815	630	860	200	482
57009091	57009090	945	800	1000	260	810

Doppelwinkel – ALUMINIUM

Id.-Nr.	A [mm]	B [mm]	H [mm]	S [mm]	Gewicht [kg]
57309025	620	400	660	150	77
57309045	660	500	700	150	103
57309065	815	630	860	200	172



Doppelwinkel – GUSS

Vorbearbeitet Id.-Nr.	Feinstgefräst Id.-Nr.	A [mm]	B [mm]	H [mm]	S [mm]	Gewicht [kg]
57409026	57409025	615	400	660	150	185
57409046	57409045	655	500	700	150	247
57409066	57409065	810	630	860	200	448
57409091	57409090	945	800	1000	300	810

Sonderausführungen auf Anfrage.

- Stahl, Aluminium oder Guss
- Für Vorrichtungsplatten

Technische Änderungen vorbehalten.

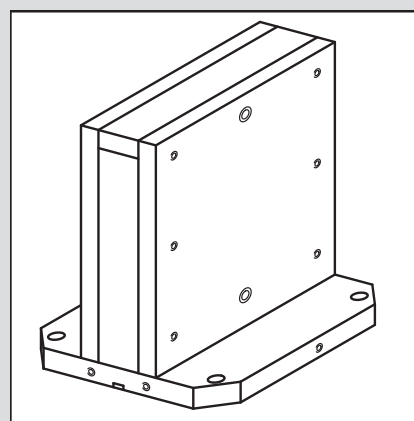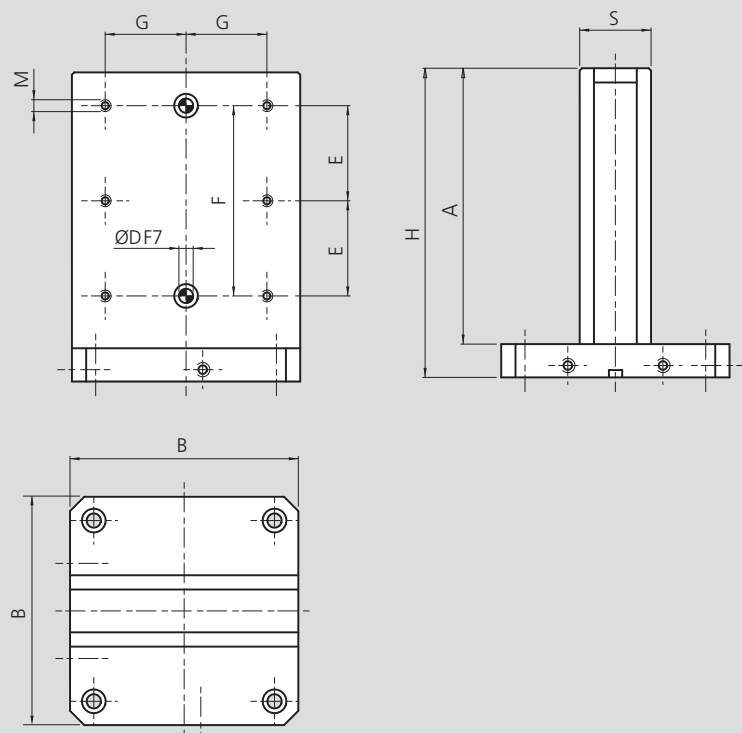

Doppelwinkel – STAHL

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	E [mm]	F [mm]	G [mm]	S [mm]	Gewicht [kg]
57041035	620	400	660	16	M12	250	500	150	150	212
57041055	660	500	700	16	M12	250	500	200	150	287
57041075	815	630	860	16	M12	350	700	250	200	482
57041100	945	800	1000	16	M12	100	800	350	260	810

Doppelwinkel – ALUMINIUM

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	E [mm]	F [mm]	G [mm]	S [mm]	Gewicht [kg]
57328035	620	400	660	16	M12	250	500	150	150	77
57328055	660	500	700	16	M12	250	500	200	150	103
57328075	815	630	860	16	M12	350	700	250	200	180



Doppelwinkel – GUSS

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	E [mm]	F [mm]	G [mm]	S [mm]	Gewicht [kg]
57428035	615	400	660	16	M12	250	500	150	150	185
57428055	655	500	700	16	M12	250	500	200	150	247
57428075	810	630	860	16	M12	350	700	250	200	448
57428100	945	800	1000	16	M12	400	800	350	300	810

Sonderausführungen auf Anfrage.

- Stahl, Aluminium oder Guss
- Mit Bohrungsrastrer

Technische Änderungen vorbehalten.

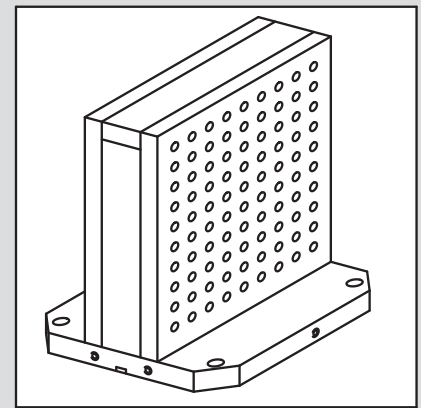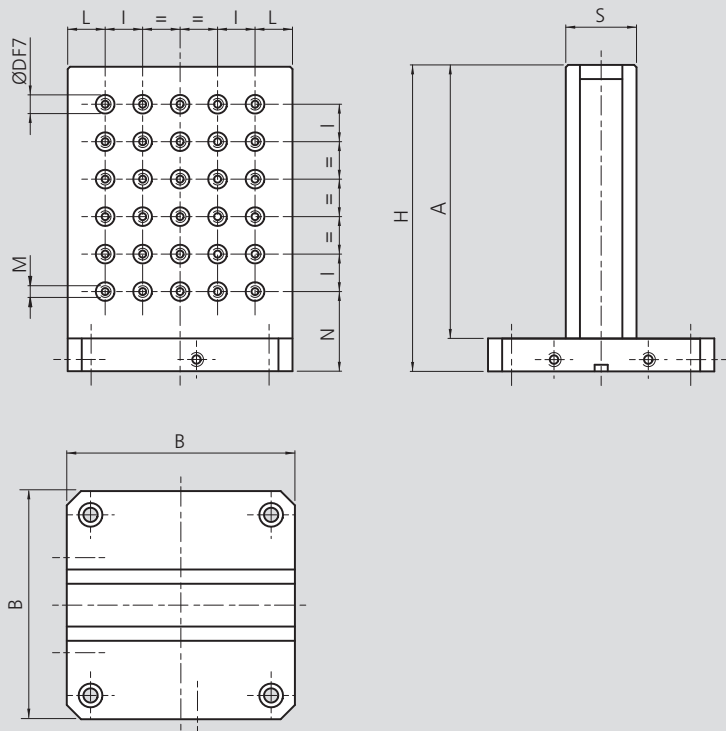

Doppelwinkel – STAHL

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	I [mm]	L [mm]	N [mm]	S [mm]	Gewicht [kg]
57040035	620	400	660	16	M12	50	50	110	150	206
57040055	660	500	700	16	M12	50	50	100	150	279
57040075	815	630	860	16	M12	50	40	110	200	468
57040100	945	800	1000	16	M12	50	50	100	260	787

Doppelwinkel – ALUMINIUM

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	I [mm]	L [mm]	N [mm]	S [mm]	Gewicht [kg]
57314035	620	400	660	16	M12	50	50	110	150	74
57314055	660	500	700	16	M12	50	50	100	150	100
57314075	815	630	860	16	M12	50	40	110	200	170



Doppelwinkel – GUSS

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	I [mm]	L [mm]	N [mm]	S [mm]	Gewicht [kg]
57414035	615	400	660	16	M12	50	50	110	150	180
57414055	655	500	700	16	M12	50	50	100	150	240
57414075	810	630	860	16	M12	50	40	110	200	440
57414100	945	800	1000	16	M12	50	50	100	300	790

Sonderausführungen auf Anfrage.

- Stahl oder Aluminium
- Aus Vollmaterial

Technische Änderungen vorbehalten.

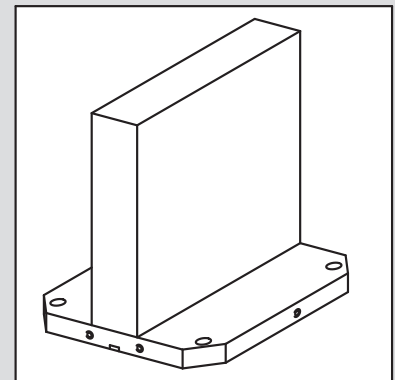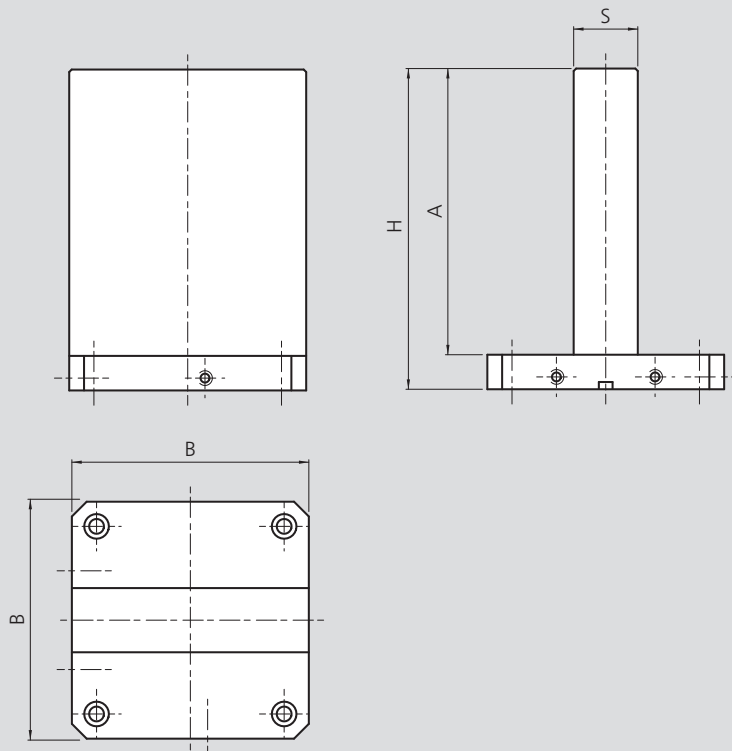

Doppelwinkel – STAHL





Id.-Nr.	A [mm]	B [mm]	H [mm]	S [mm]	Gewicht [kg]
57008030	370	320	410	80	107
57008040	480	400	520	100	201
57008050	580	500	620	100	306

Doppelwinkel – ALUMINIUM

Id.-Nr.	A [mm]	B [mm]	H [mm]	S [mm]	Gewicht [kg]
57308020	270	250	310	80	23

Sonderausführungen auf Anfrage.

- Stahl
- Feinstgefräst

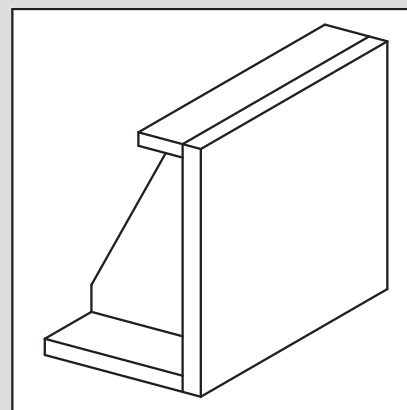



Technische Änderungen vorbehalten.

Aufspannwinkel – STAHL

Id.-Nr.	A [mm]	B1 [mm]	B2 [mm]	Gewicht [kg]
57005030	360	320	230	66
57005040	460	400	330	130
57005050	510	400	330	139
57005060	510	500	330	182
57005070	560	500	330	196
57005080	560	630	430	305
57005090	660	630	430	343

Sonderausführungen auf Anfrage.

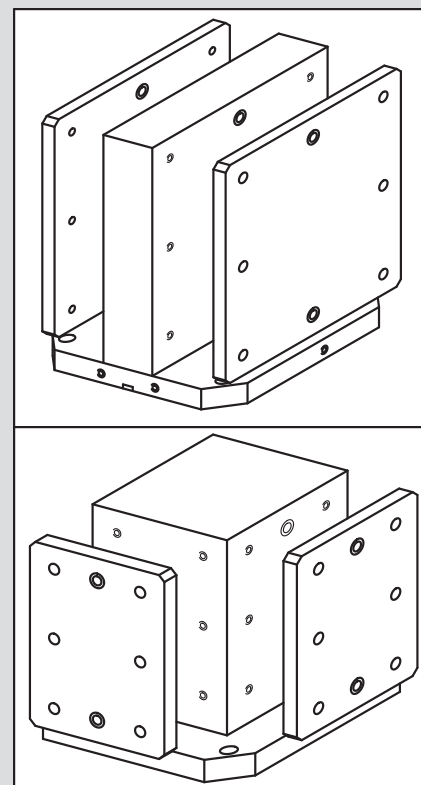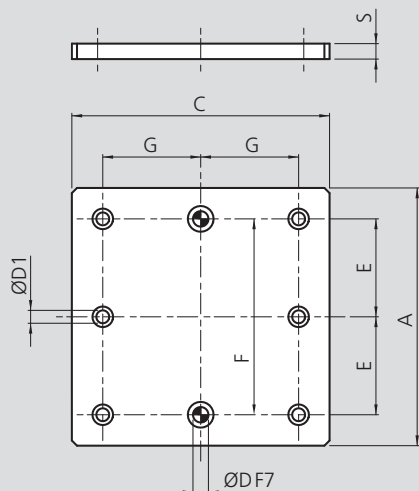



Technische Änderungen vorbehalten.

Wechselplatten – STAHL

Id.-Nr.	C [mm]	A [mm]	Ø D [mm]	Ø D1 [mm]	E [mm]	F [mm]	G [mm]	S [mm]	Gewicht [kg]
57120025	160	400	12	11	150	300	40	20	10
57120090	250	600	16	13	250	500	75	25	29
57120130	350	600	16	13	250	500	125	25	41
57120155	400	600	16	13	250	500	150	25	47
57120175	450	800	16	13	350	700	175	25	70.5
57120195	500	600	16	13	250	500	200	25	58.5
57120210	550	800	16	13	350	700	225	25	86
57120235	630	800	16	13	350	700	250	25	98.5
57120250	800	800	16	13	350	700	350	30	149

Sonderausführungen auf Anfrage.

- Stahl geschliffen
- Mit Bohrungsrastrer

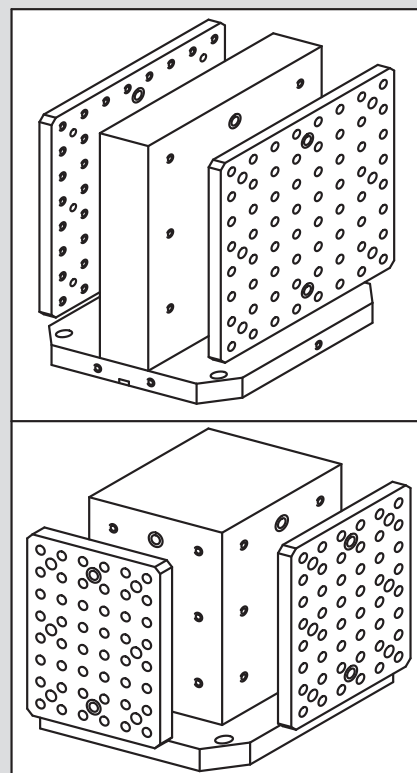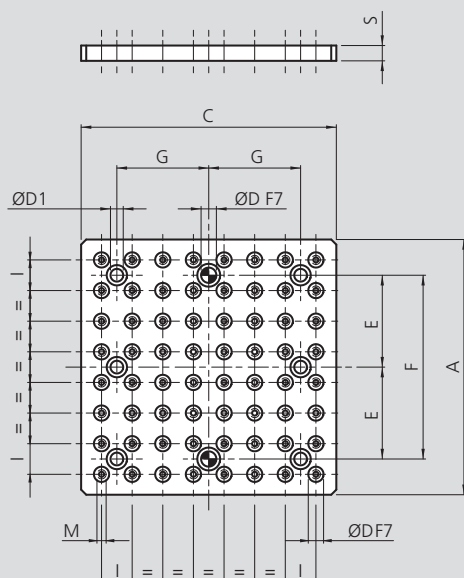



Technische Änderungen vorbehalten.

Rasterplatten – STAHL

Id.-Nr.	C [mm]	A [mm]	Ø D [mm]	Ø D1 [mm]	M	E [mm]	F [mm]	G [mm]	I [mm]	S [mm]	Gewicht [kg]
57050025	160	400	12	11	M10	150	300	40	40	30	15
57050090	250	600	16	13	M12	250	500	75	50	35	39
57050130	350	600	16	13	M12	250	500	125	50	35	55
57050155	400	600	16	13	M12	250	500	150	50	35	63
57050175	450	800	16	13	M12	350	700	175	50	35	95
57050195	500	600	16	13	M12	250	500	200	50	35	78
57050210	550	800	16	13	M12	350	700	225	50	35	114
57050235	630	800	16	13	M12	350	700	250	50	35	131
57050250	800	800	16	13	M12	350	700	350	50	35	166

Sonderausführungen auf Anfrage.

- Stahl geschliffen
- Ohne Bohrungsrastrer

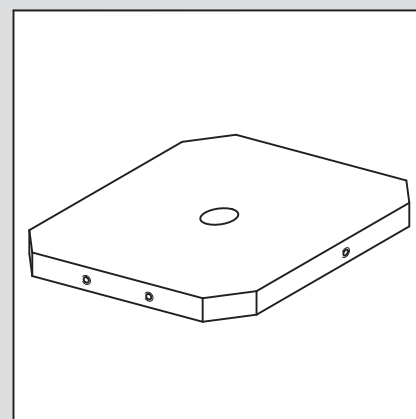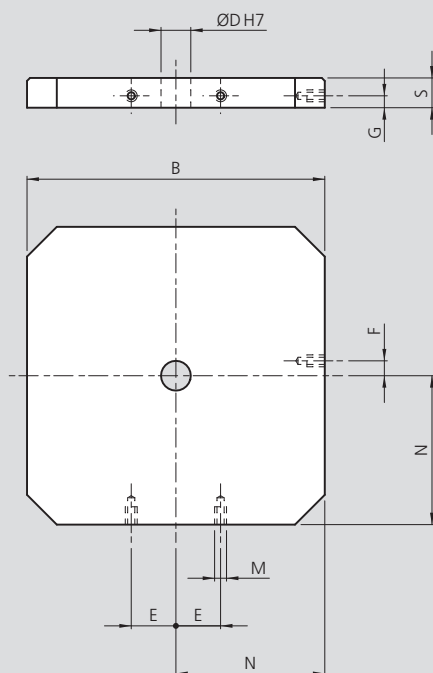



Technische Änderungen vorbehalten.

Palettenplatten – STAHL

Id.-Nr.	B [mm]	Ø D [mm]	M	N [mm]	E [mm]	F [mm]	G [mm]	S [mm]	Gewicht [kg]
57130010	320	30	-	160	-	-	-	40	30
57130020	400	50	M16	200	55	25	18	40	48
57130030	450	50	-	225	-	-	-	40	61
57130040	500	50	M16	250	75	25	18	40	76
57130050	550	50	-	275	-	-	-	40	93
57130060	630	50	M16	315	100	25	18	40	121

Sonderausführungen auf Anfrage.

- Stahl geschliffen
- Mit Bohrungsrastrer

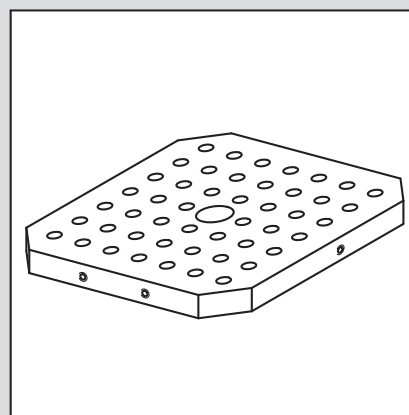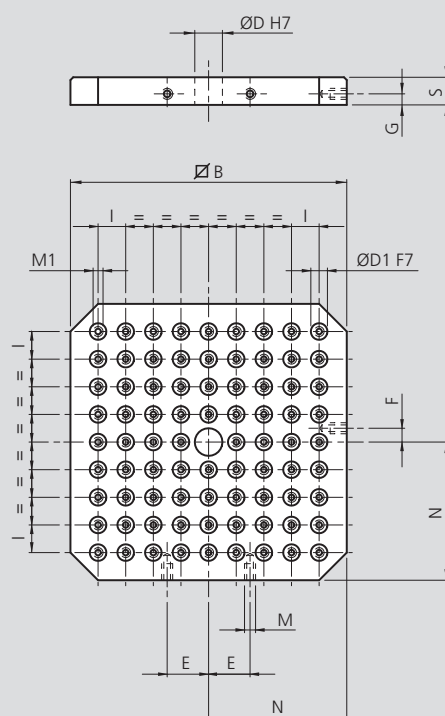

Technische Änderungen vorbehalten.

Rasterplatten – STAHL

Id.-Nr.	B [mm]	$\varnothing D$ [mm]	M	E [mm]	F [mm]	G [mm]	$\varnothing D1$ [mm]	M1	I [mm]	N [mm]	S [mm]	Gewicht [kg]
57140010	320	30	-	-	-	-	16	M12	50	160	40	29
57140020	400	50	M16	55	25	18	16	M12	50	200	40	47
57140030	450	50	-	-	-	-	16	M12	50	225	40	59
57140040	500	50	M16	75	25	18	16	M12	50	250	40	74
57140050	550	50	-	-	-	-	16	M12	50	275	40	90
57140060	630	50	M16	100	25	18	16	M12	50	315	40	117

Sonderausführungen auf Anfrage.