
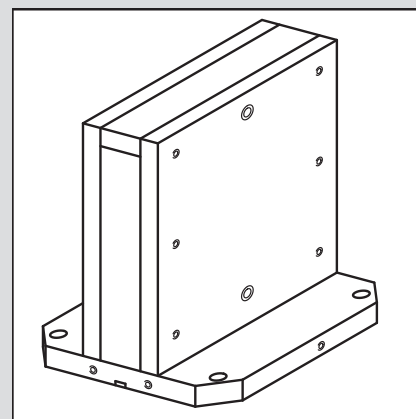


- Stahl, Aluminium oder Guss
- Für Vorrichtungsplatten

Technische Änderungen vorbehalten.

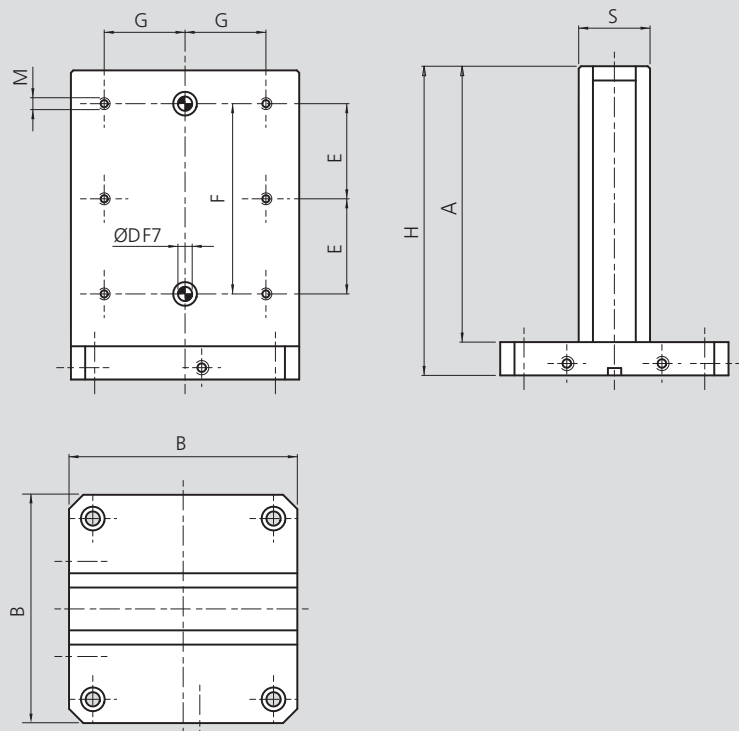

Doppelwinkel – STAHL

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	E [mm]	F [mm]	G [mm]	S [mm]	Gewicht [kg]
57041035	620	400	660	16	M12	250	500	150	150	212
57041055	660	500	700	16	M12	250	500	200	150	287
57041075	815	630	860	16	M12	350	700	250	200	482
57041100	945	800	1000	16	M12	100	800	350	260	810

Doppelwinkel – ALUMINIUM

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	E [mm]	F [mm]	G [mm]	S [mm]	Gewicht [kg]
57328035	620	400	660	16	M12	250	500	150	150	77
57328055	660	500	700	16	M12	250	500	200	150	103
57328075	815	630	860	16	M12	350	700	250	200	180

Doppelwinkel – GUSS

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	E [mm]	F [mm]	G [mm]	S [mm]	Gewicht [kg]
57428035	615	400	660	16	M12	250	500	150	150	185
57428055	655	500	700	16	M12	250	500	200	150	247
57428075	810	630	860	16	M12	350	700	250	200	448
57428100	945	800	1000	16	M12	400	800	350	300	810

Sonderausführungen auf Anfrage.