
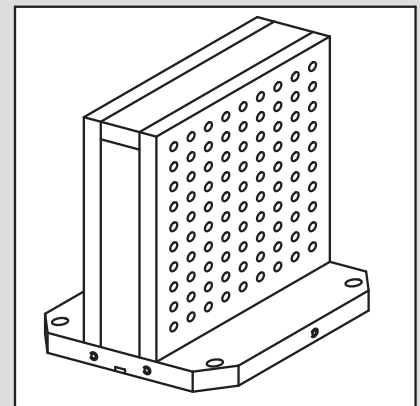


- Stahl, Aluminium oder Guss
- Mit Bohrungsrastrer

Technische Änderungen vorbehalten.

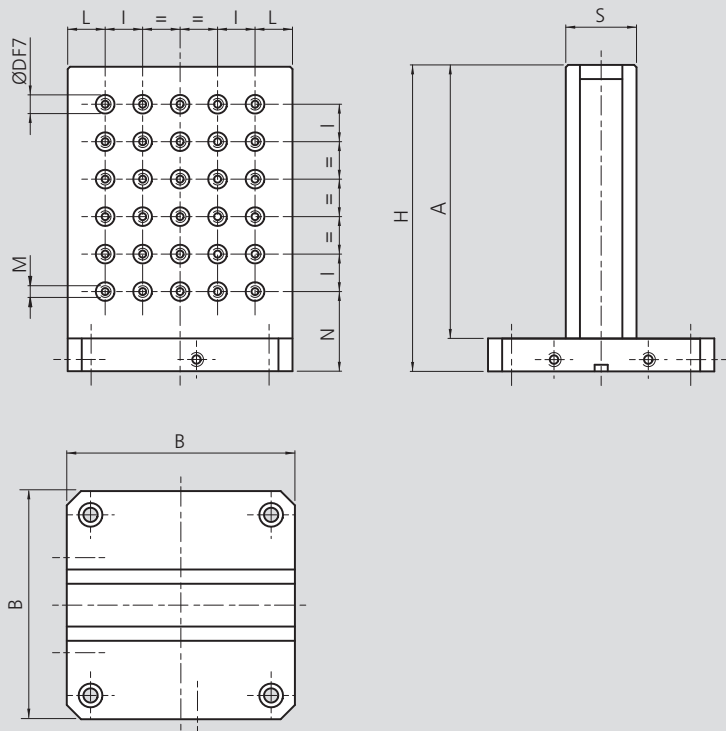

Doppelwinkel – STAHL

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	I [mm]	L [mm]	N [mm]	S [mm]	Gewicht [kg]
57040035	620	400	660	16	M12	50	50	110	150	206
57040055	660	500	700	16	M12	50	50	100	150	279
57040075	815	630	860	16	M12	50	40	110	200	468
57040100	945	800	1000	16	M12	50	50	100	260	787

Doppelwinkel – ALUMINIUM

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	I [mm]	L [mm]	N [mm]	S [mm]	Gewicht [kg]
57314035	620	400	660	16	M12	50	50	110	150	74
57314055	660	500	700	16	M12	50	50	100	150	100
57314075	815	630	860	16	M12	50	40	110	200	170

Doppelwinkel – GUSS

Id.-Nr.	A [mm]	B [mm]	H [mm]	Ø D [mm]	M	I [mm]	L [mm]	N [mm]	S [mm]	Gewicht [kg]
57414035	615	400	660	16	M12	50	50	110	150	180
57414055	655	500	700	16	M12	50	50	100	150	240
57414075	810	630	860	16	M12	50	40	110	200	440
57414100	945	800	1000	16	M12	50	50	100	300	790

Sonderausführungen auf Anfrage.