

RU-1-10 RU-1-16

Rotary union for 1 medium

- For closed and open center cylinders
- Media: air, oil or coolant

Application/customer benefits

- Rotary union for media supply for rotating cylinders

Technical features

RU-1-10: Medium: oil / coolant (**can not** rotate dry) through-hole approx. \varnothing 3 mm

RU-1-16: Medium: air / oil / coolant (**can** rotate dry, non-pressurised) through-hole approx. \varnothing 4.5 mm
Max. flow rate 30 l/min.

Note: The medium must be free of contamination.
Filter 25 μ m requested


Standard equipment

RU-1-10 Id. No. 014604

RU-1-16 Id. No. 043271




RU-1-10

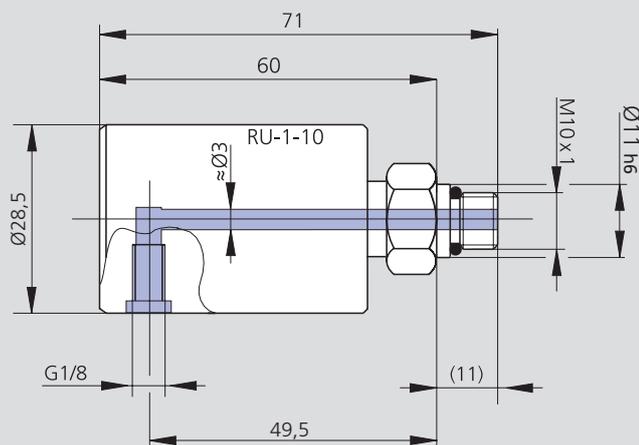

Subject to technical changes.
For more detailed information please ask our customer service.

RU-1-16

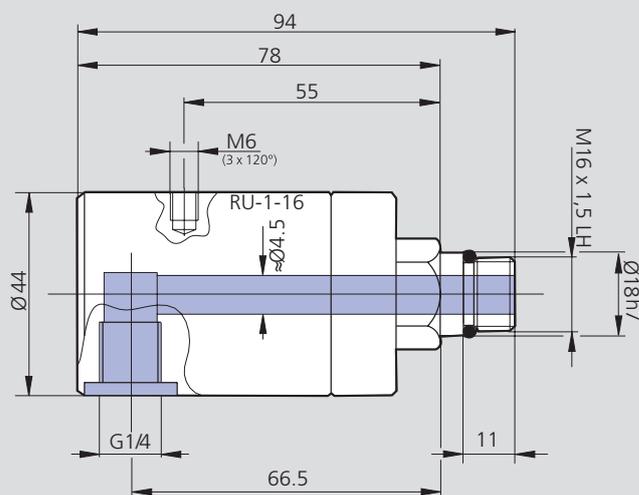

Subject to technical changes.
For more detailed information please ask our customer service.

Technical data

SMW-AUTOBLOK Type	Id. No.	max. speed r.p.m.	max. pressure bar	Weight kg	Filter requested μ m
RU-1-10	014604	7500	15	0.15	25
RU-1-16	043271	7000	30	0.40	25

Attention: Limitation when using max. r.p.m. and max. operating pressure. In case of need, please ask for a additional diagram.