# ■ For double piston cylinder ZHVD-DFR for D-chucks



## Application/customer benefits

- Rotary union for media supply for rotating cylinders
- Universal for air + oil / air + coolant
- Can also rotate dry (without medium applied)

#### **Technical features**

- Rotary union for 2 media
- Port A for air, oil and coolant
- Port B for air

Note: The medium must be free of contamination Filter 25 µm requested

# Standard equipment


RU-2-20

Anti rotation pinblok

Adapter for tube  $\emptyset$  12 mm (ID = 10 mm) Id. No. 044154

### **Option**

Adapter for tube  $\varnothing$  10 mm (ID = 8 mm) Id. No. 044149 Adapter for tube  $\varnothing$  8 mm (ID = 6 mm) Id. No. 044155

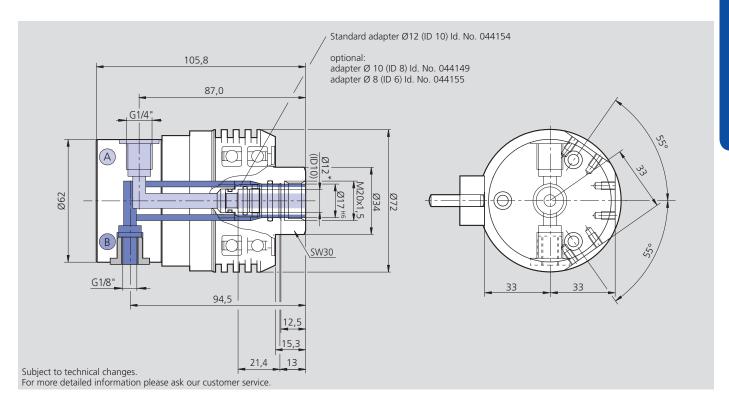

### **Technical data**

SMW-AUTOBLOK Type	ld. No.	max. speed	max. pressure port A media: air, oil, coolant		max. pressure port B media: air only		Weight	Filter requested
		r.p.m.	bar	psi	bar	psi	kg	μm
RU-2-20	044972	4000	40	580	10	145	0.94	25