




gruppe

SMW-AUTOBLOK worldwide

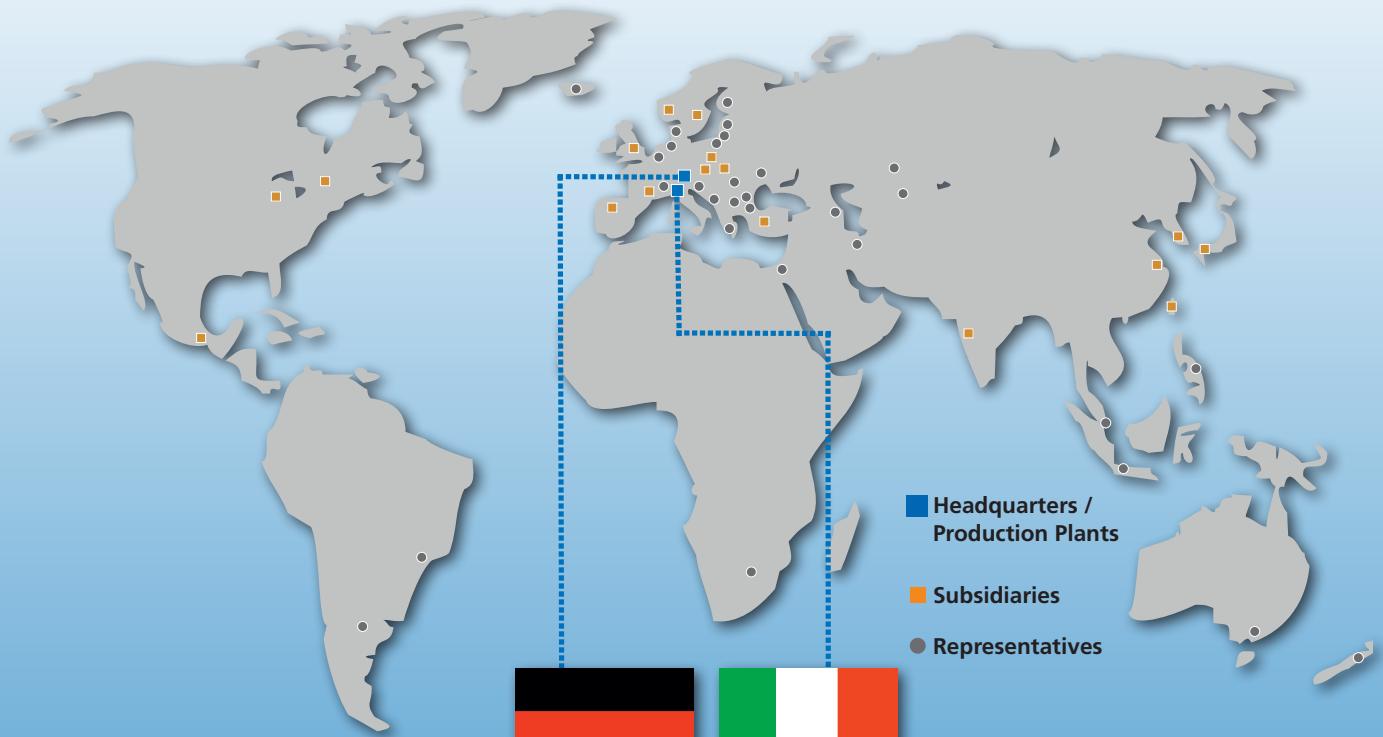

SMW-AUTOBLOK manufacturing plant Meckenbeuren
Development | Manufacturing | Sales | Service | Support



AUTOBLOK manufacturing plant Caprie-Torino



SMW-electronics manufacturing plant Meckenbeuren
Development | Manufacturing | Sales | Service | Support



SMW Factory Airport Meckenbeuren
Production | Automation | Electronics | Clamping systems

Visit our website: www.smw-autoblok.com

www.smw-electronics.de

Market segments



Automotive



Industrial Equipment




OCTG



Aerospace



Off Highway

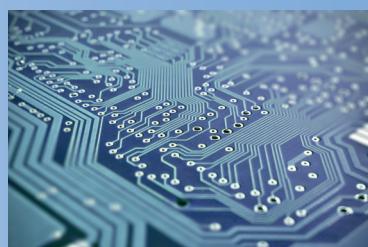

Electronics



Mold Industry



Plastics



Automation
and Handling



Mining Industry
Cranes



Robots / Cobots



Medical Technology



Intralogistics



Packaging Industry



Powertrain

Product range

 AI	MX-S Mechatronic small parts gripper <ul style="list-style-type: none">■ 2 fingers parallel■ ID and OD clamping■ Gripping force independent of gripping speed and stroke■ Mechatronic drive with gripping force retention■ Position sensing and monitoring of the gripping force■ Protection class: IP40	 Page 64	PP Pneumatic/hydraulic universal gripper <ul style="list-style-type: none">■ 2 fingers parallel■ ID and OD clamping■ Air sensing■ Rigid steel housing■ Sealed / Protection class: IP64
 AI	MX-M Mechatronic universal gripper <ul style="list-style-type: none">■ 2 fingers parallel■ ID and OD clamping■ Gripping force independent of gripping speed and stroke■ Mechatronic drive with gripping force retention■ Position sensing and monitoring of the gripping force■ Sealed / Protection class: IP64	 Page 65	PL-N/L RR 320/380 Pneumatic universal gripper <ul style="list-style-type: none">■ 2 fingers parallel■ ID and OD clamping■ Gripper with automatic gripper finger change■ Air sensing■ Aluminum housing■ Sealed / Protection class: IP64
 AI	MX-U Mechatronic universal long stroke gripper <ul style="list-style-type: none">■ 2 fingers parallel, extra long stroke■ ID and OD clamping■ Compact design, low height■ Mechatronic drive with gripping force retention■ Position sensing and monitoring of the gripping force■ Sealed / Protection class: IP54 (electronics IP67)	 Page 66	PRS Robot Tool Changer system <ul style="list-style-type: none">■ Quick and safe gripper change■ Integrated media feed-through■ Integrated interlock status query■ Pneumatic drive
 AI	MX-L Mechatronic long stroke gripper <ul style="list-style-type: none">■ 2 fingers parallel■ OD clamping■ Gripping force independent of gripping speed and stroke■ Mechatronic drive with gripping force retention■ Position sensing and monitoring of the gripping force■ Sealed / Protection class: IP67	 Page 68	Inductive Coupling System Contact free transmission of energy and signals <ul style="list-style-type: none">■ Operation and control of MX grippers■ F100-2IOL compatible with MX-S/ MX-M grippers■ F180-ETH compatible with MX-L grippers■ C40 for tool changers (also retrofit solution)■ Wear free ■ Protection class: IP67
 AI	2PXS/2PXM/2PXL Pneumatic universal gripper <ul style="list-style-type: none">■ 2 fingers parallel■ ID and OD clamping■ Aluminum housing■ Protection class: IP64 (2PXS: IP40)■ Optional: Sensor package for gripping position/ end position monitoring	 Page 84	IPS 4.0 Inductive proximity sensor <ul style="list-style-type: none">■ IPS 4.0 M08-PNP■ IPS 4.0 M08-0-10V e-sensing■ IPS 4.0 8.8x24.6-0-10V e-sensing■ Suitable for pneumatic grippers for end position sensing or gripper position sensing■ Protection class: IP67
 AI	3PXS/3PXM/3PXL Pneumatic centric gripper <ul style="list-style-type: none">■ 3 fingers centric■ ID and OD clamping■ Aluminum housing■ Protection class: IP64 (3PXS: IP40)■ Optional: Sensor package for gripping position/ end position monitoring	 Page 88	Digitized Workholding For automation application <ul style="list-style-type: none">■ Long-stroke vise■ Zero point clamping system for quick change system
 AI	Gripper finger blanks Accessories <ul style="list-style-type: none">■ Standard blanks for pneumatic grippers■ Made from Aluminum■ Customized gripper fingers	 Page 90	Application examples Robot application <ul style="list-style-type: none">■ Mechatronic grippers:<ul style="list-style-type: none">• Inductive coupling system with hollow shaft allows for non-contact energy and signal transmission and endless 360° rotation on both sides for the MX-L 520 long-stroke gripper• Automated quick jaw change

GRIPPING TECHNOLOGY from **SMW-electronics**

- Innovative
- Reliable
- Flexible
- Intelligent

Network

Integration



Interface/Connectivity



Everything from
a single source.

Actuator

Our specialists work in a completely customer-oriented manner to develop tailor-made solutions for actuators and interfaces. Our customized solutions can be seamlessly integrated into all processes and applications. **Everything from a single source.**

Mechatronic Grippers

Product line MOTIACT



- Gripping force independent of gripping speed and stroke
- Gripping force retention in case of power failure
- Measuring system (absolute sensor) to monitor the gripping position
- Safety features (self-locking; MX-L: additional features)
- Optional use of inductive coupling systems for 360° rotation. Contactless wear-free transmission of energy and signals
- Pre-positioning and sensitive gripping force adjustment
- Interfaces with intelligent motion profiles
- Protection class: Protected to IP standard
- AI ready: prepared for AI use

	MX-S SMALL PARTS GRIPPER			MX-M UNIVERSAL GRIPPER		MX-U UNIVERSAL LONG STROKE GRIPPER	MX-L LONG STROKE GRIPPER	
Type	MX-S 025	MX-S 040	MX-S 050	MX-M 080	MX-M 125	MX-U 050	MX-L 335 compact	MX-L 520
2 finger parallel	+	+	+	+	+	+	+	+
Stroke per jaw	3 mm	6 mm	8 mm	8 mm	13 mm	52 mm	55 mm	99 mm
Gripping force close/open	40 N	150 N	200 N	1.200 N	1.800 N	300 N	2.000 - 27.000 N	10.000 - 40.000 N close
ID clamping	+	+	+	+	+	+	-	-
OD clamping	+	+	+	+	+	+	+	+
Protection class	IP40			IP64		IP54 + (elektronic) IP67	IP67	IP67
Interface	Digital-IO	IO-Link or Digital-IO				IO-Link or RS 485	Profinet	Profinet or Ethernet/IP
Gripping force retention	+	+	+	+	+	+	+	+
URCap	optional	optional	+	optional	optional	optional	-	-



Use of AI products

Benefits:

- Predictive maintenance
- Control and optimization of production processes
- Increasing quality
- Reduction of downtimes
- Optimization of process parameters

GENERAL NOTES FOR ALL MECHATRONIC GRIPPERS!

Gripping force is the arithmetic sum of the individual force applied to each jaw at distance on the drawing.

Repeat accuracy is defined as a distribution of the end Position for 100 consecutive strokes.

Recommended workpiece weight is calculated for force-fit gripping with a coefficient of static friction of 0,1 and a safety factor of 2 against workpiece slippage at acceleration due to gravity g. For form-fit or capture gripping, there are significantly higher permissible workpiece weights.

Closing and opening times are movement times of the base jaws only, without application-specific gripper fingers. PLC reaction times are not included, and are to be considered when cycle times are calculated.

MX-S

Mechatronic gripper



MX-S

Mechatronic small parts gripper

■ 2 finger parallel

Application/customer benefits

- Gripping force independent of gripping speed and stroke
- Mechatronic drive with gripping force retention
- Position measuring system absolute (from MX-S 040)
- Pre-positioning and gripping force adjustment
- ID and OD clamping
- Suitable for use as small parts gripper due to lightweight and compact design
- Also suitable for cobot applications and pick & place tasks

Technical features

- Aluminum housing
- Protection class: IP40
- Adjustable gripping position and force
- Repeatability 0,02 mm
- Power supply 19.2 ... 30 V / up to 2 A
- Communication interface IO-Link or Digital-IO
- URCap optionally available

Standard equipment


Gripper with centering sleeves (without gripper fingers and mounting bolts)

M8/M12 Connector

Power and Communication Interface (IO-Link / Digital-IO)



LED Status indication



Integrated Position measuring system absolute (from MX-S 040)

Common interface

Robot connection



Mechatronic drive

with gripping force retention

Common interface

gripper fingers






* The illustration shows an example with the MX-S 050 gripper.

Type	Communication Interface	Mechatronic drive	Gripping force retention	Position measuring system	Pre-positioning	Gripping force adjustment	URCap (optional)
MX-S 025	Digital-IO	●	●	● ¹	-	-	●
MX-S 040	IO-Link	●	●	●	●	●	-
	Digital-IO	●	●	●	●	●	●
MX-S 050	IO-Link	●	●	●	●	●	-
	Digital-IO	●	●	●	●	●	●

¹ End position monitoring/gripper feedback

Dimension and technical data

Mechatronic gripper

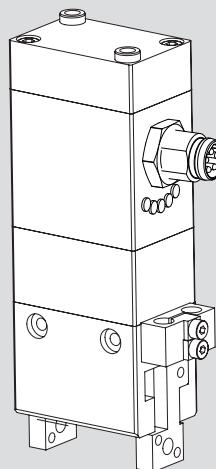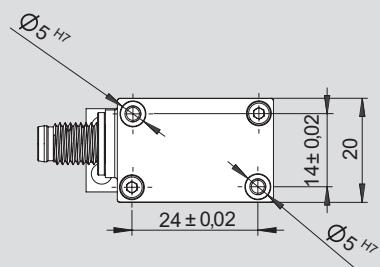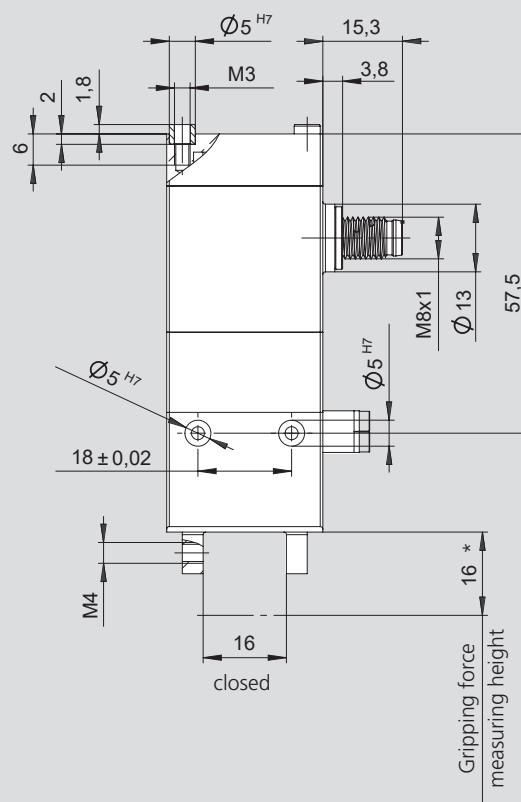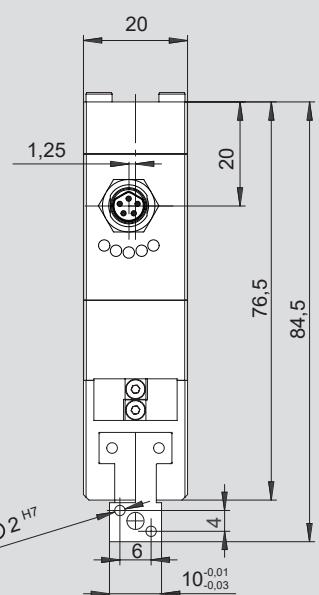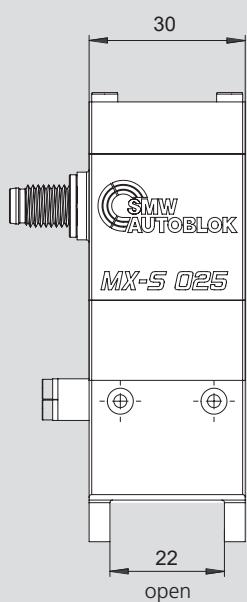


Subject to technical changes.
For more detailed information please ask our customer service.

* Gripping force is the arithmetic sum of the individual forces applied on each jaw at the specified distance.

Type	MX-S 025 DIO	
Id. No.	480150	
Gripping force	N	40
Stroke per jaw	mm	3
Repeatability	mm	0,02
Weight	kg	0,14
Recommended workpiece weight	kg	0,2
Closing time	s	0,07
Opening time	s	0,07
Voltage	V	19,2 ... 30 V
Max. Power consumption	A	1 A
Idle current (in non-moving state)	A	I < 100 mA
Protection class		IP40
Interface		Digital-IO

Pin assignment M8x1 - 5 Pin B-coded Male

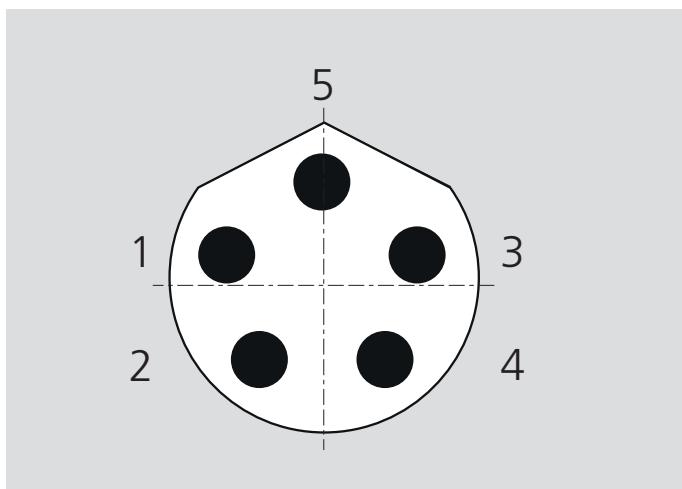

Digital IO Interface M8-5B


Pin	Function	Description
1	+24V	Positive supply voltage
2	Opened	Digital output open feedback
3	GND	Ground
4	Ctrl	Digital input signal
5	Closed	Digital output closed Feedback

Force and moment loading




Forces and moments

Shows static forces and moments that can act in addition to the gripping force.



Mx max. moment in X-axis	Nm	0,80
My max. moment in Y-axis	Nm	0,60
Mz max. moment in Z-axis	Nm	1,50
Fz max. weight force in Z-axis	N	100

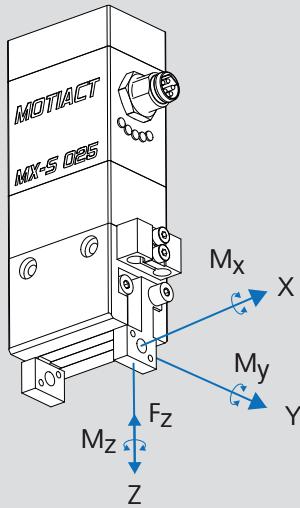

Notes

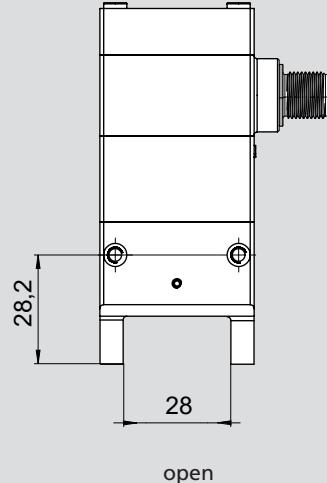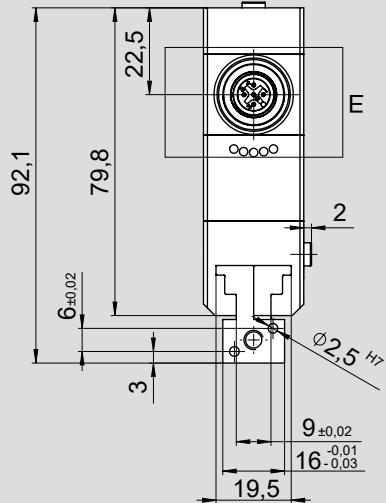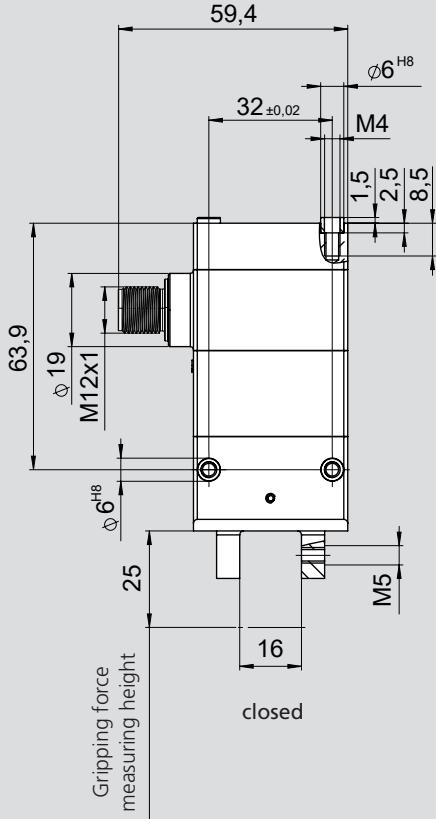


*Gripping force is the arithmetic sum of the individual forces applied on each jaw at the specified distance.

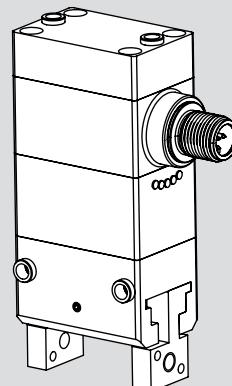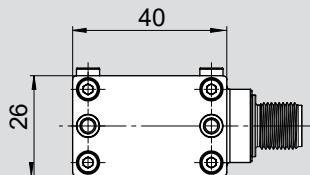

Subject to technical changes.
For more detailed information please ask our customer service.




Type	MX-S 040 IOL	MX-S 040 DIO
Id. No.	480240	480340
Gripping force	N	150
Stepless gripping force adjustment	✓	-
Stroke per jaw	mm	6,0
Repeatability	mm	0,02
Weight	kg	0,31
Recommended workpiece weight	kg	0,75
Closing time	s	k. A
Opening time	s	k. A
Voltage	V	19,2 ... 30 V, U _S 18 ... 30 V
Max. Power consumption	A	I _S ≤ 100 mA, I _A ≤ 2 A
Idle current (in non-moving state)	A	k. A
Protection class		IP 40
Interface	IO-LINK	Digital-IO

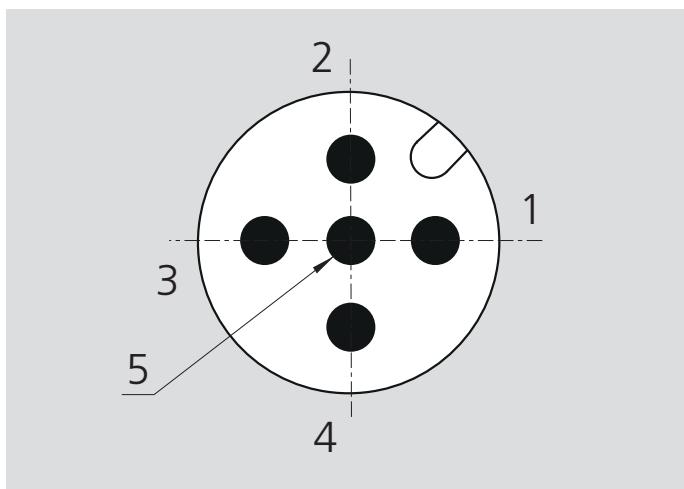Pin assignment M12x1 - 5 Pin A-coded Male**IO-Link Port B**



Pin	Function	Description
1	US+	Power supply IO-Link logic 24V DC
2	UA+	Power supply actuator 24V DC
3	US-	Ground IO-Link logic
4	C/Q	IO-Link signal
5	UA-	Ground Actuator

Digital IO Interface M12-5A

Pin	Function	Description
1	+24V	Positive supply voltage
2	+ 24 V	Digital output opened feedback
3	GND	Ground
4	C/Q	Digital input control signal
5	GND	Digital output closed feedback

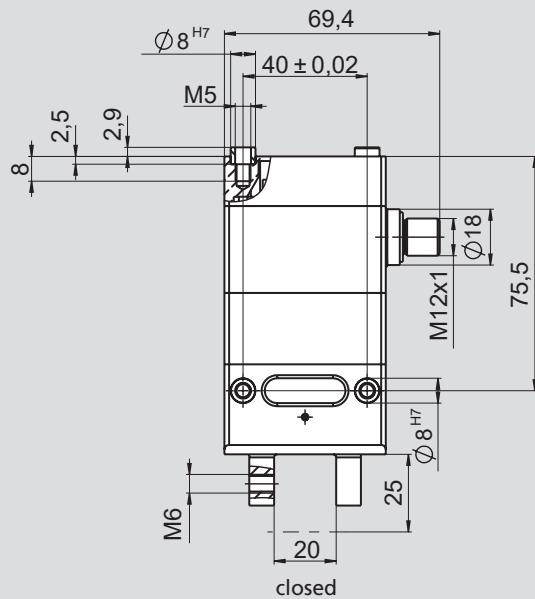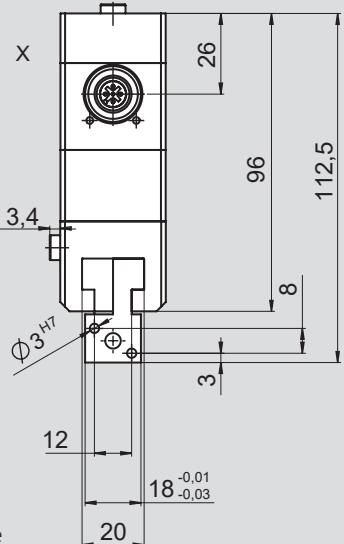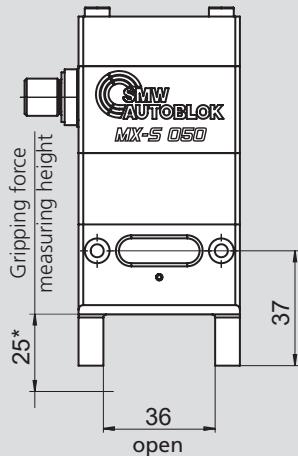


*Gripping force is the arithmetic sum of the individual forces applied on each jaw at the specified distance.

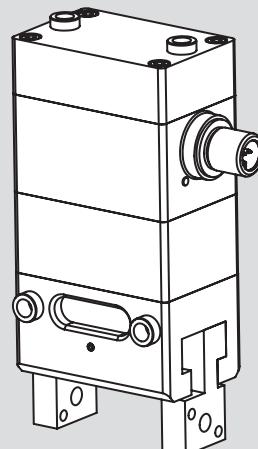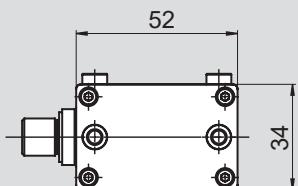

Subject to technical changes.
For more detailed information please ask our customer service.

Type	MX-S 050 IOL	MX-S 050 DIO
Id. No.	480020	480120
Gripping force	N	200
Stepless gripping force adjustment	N	60 - 200
Stroke per jaw	mm	8
Repeatability	mm	0,02
Weight	kg	0,58
Recommended workpiece weight	kg	1
Closing time	s	0,35
Opening time	s	0,35
Voltage	V	U _a 19,2 ... 30 V, U _s 18 ... 30 V
Max. Power consumption	A	I _S ≤ 100 mA, I _A ≤ 2 A
Idle current (in non-moving state)	A	I _S = I _A < 100 mA
Protection class		IP40
Interface	IO-LINK	Digital-IO

Pin assignment M12x1 - 5 Pin A-coded Male

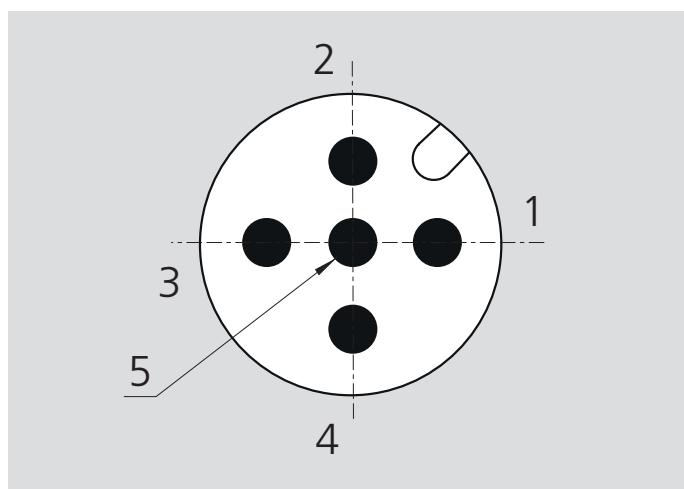

IO-Link Port B		
Pin	Function	Description
1	US+	Power supply IO-Link logic 24V DC
2	UA+	Power supply actuator 24V DC
3	US-	Ground IO-Link logic
4	C/Q	IO-Link signal
5	UA-	Ground Actuator


Digital IO Interface M12-5A		
Pin	Function	Description
1	+24V	Positive supply voltage
2	Opened	Digital output opened feedback
3	GND	Ground
4	Ctrl	Digital input control signal
5	Closed	Digital output closed feedback

Force and moment loading

Forces and moments

Shows static forces and moments that can act in addition to the gripping force.

Mx max. moment in X-axis	Nm	5
My max. moment in Y-axis	Nm	5
Mz max. moment in Z-axis	Nm	5
Fz max. weight force in Z-axis	N	200

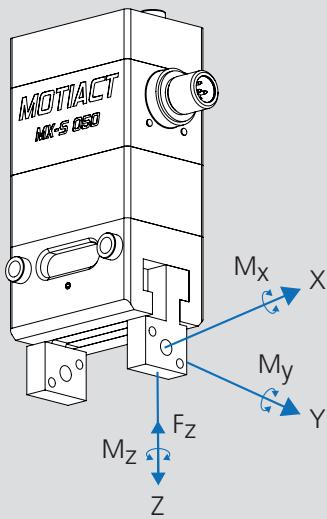

GRIPPER-KIT MX-S 050 UR

Mechatronic small parts gripper kit UR

■ 2 finger parallel



Application/customer benefits

- Ready for immediate use: Complete gripper unit incl. mechatronic gripper, gripper fingers, fastening accessories, connection cable and URCap
- Mechatronic drive with gripping force retention
- Position measuring system (end position sensing/gripper jaw)
- Kompatibel zu UR3e, UR5e, UR10e, UR16e
- ID and OD clamping
- Suitable for use as small parts gripper due to lightweight and compact design
- Also suitable for customized cobot applications and pick & place tasks

Technical features

- Aluminum housing
- Protection class: IP40
- Repeatability 0,02 mm
- URCap

Standard equipment

Gripper kit, adaptation flange, gripper finger, fastening screws, connecting cable and URCap

GRIPPER KIT MX-S 050 UR

M12 Connector

Power and Communication
for connection with UR Cobot

LED Status indication

Adaption flange

Suitable for UR3e, UR5e,
UR10e, UR16e

Mechatronic drive




with gripping force retention

Common interface

gripper fingers

Universal gripper fingers

included in standard equipment

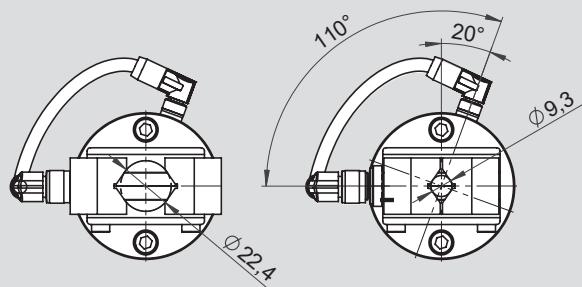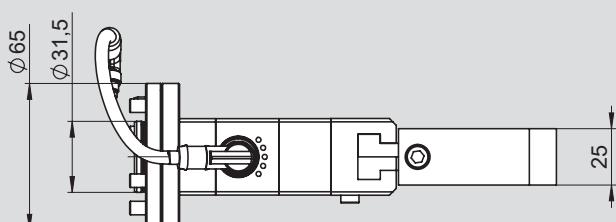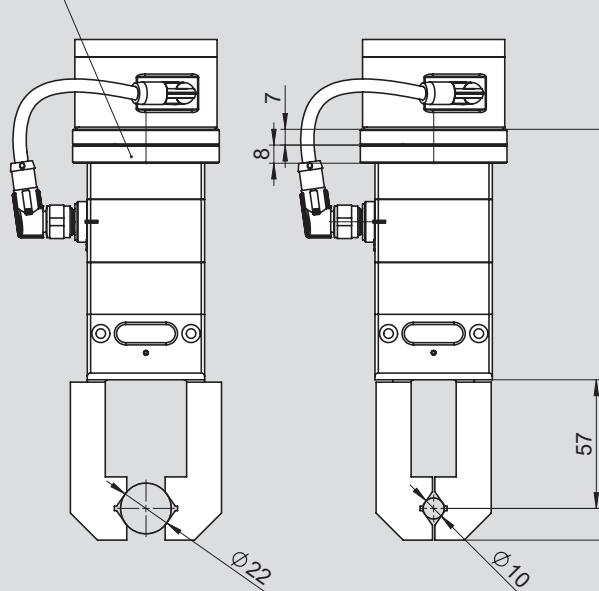**Adaption flange:**UR3e, UR5e,
UR10e, UR16e,

Subject to technical changes.
For more detailed information please ask our customer service.

Type	GRIPPER KIT MX-S 050 UR	
Id. No.	480220	
Gripping force	N	100
Stroke per jaw	mm	8
Repeatability	mm	0,02
Weight	kg	0,9
Recommended workpiece weight	kg	0,
Closing time	s	0,4
Opening time	s	0,4
Voltage	V	19,2 ... 30 V
Max. Power consumption	A	0,6 A
Idle current (in non-moving state)	A	I < 100 mA
Protection class		IP40
Interface		Digital-IO

**Mechatronic universal gripper****■ 2 finger parallel****Application/customer benefits**


- Gripping force independent of gripping speed and stroke
- Mechatronic drive with gripping force retention
- Position measuring system (absolute)
- Pre-positioning and gripping force adjustment
- ID and OD clamping clamping
- Use as universal gripper

Technical features

- Aluminium housing
- Sealed / Protection class: IP64
- Adjustable gripping position and force
- Repeatability 0,02 mm
- Power supply 19.2 ... 30 V / 5 A
- Communication interface IO-Link or Digital-IO
- URCap optionally available




Standard equipment

Gripper with centering sleeves (without gripper fingers and mounting bolts)


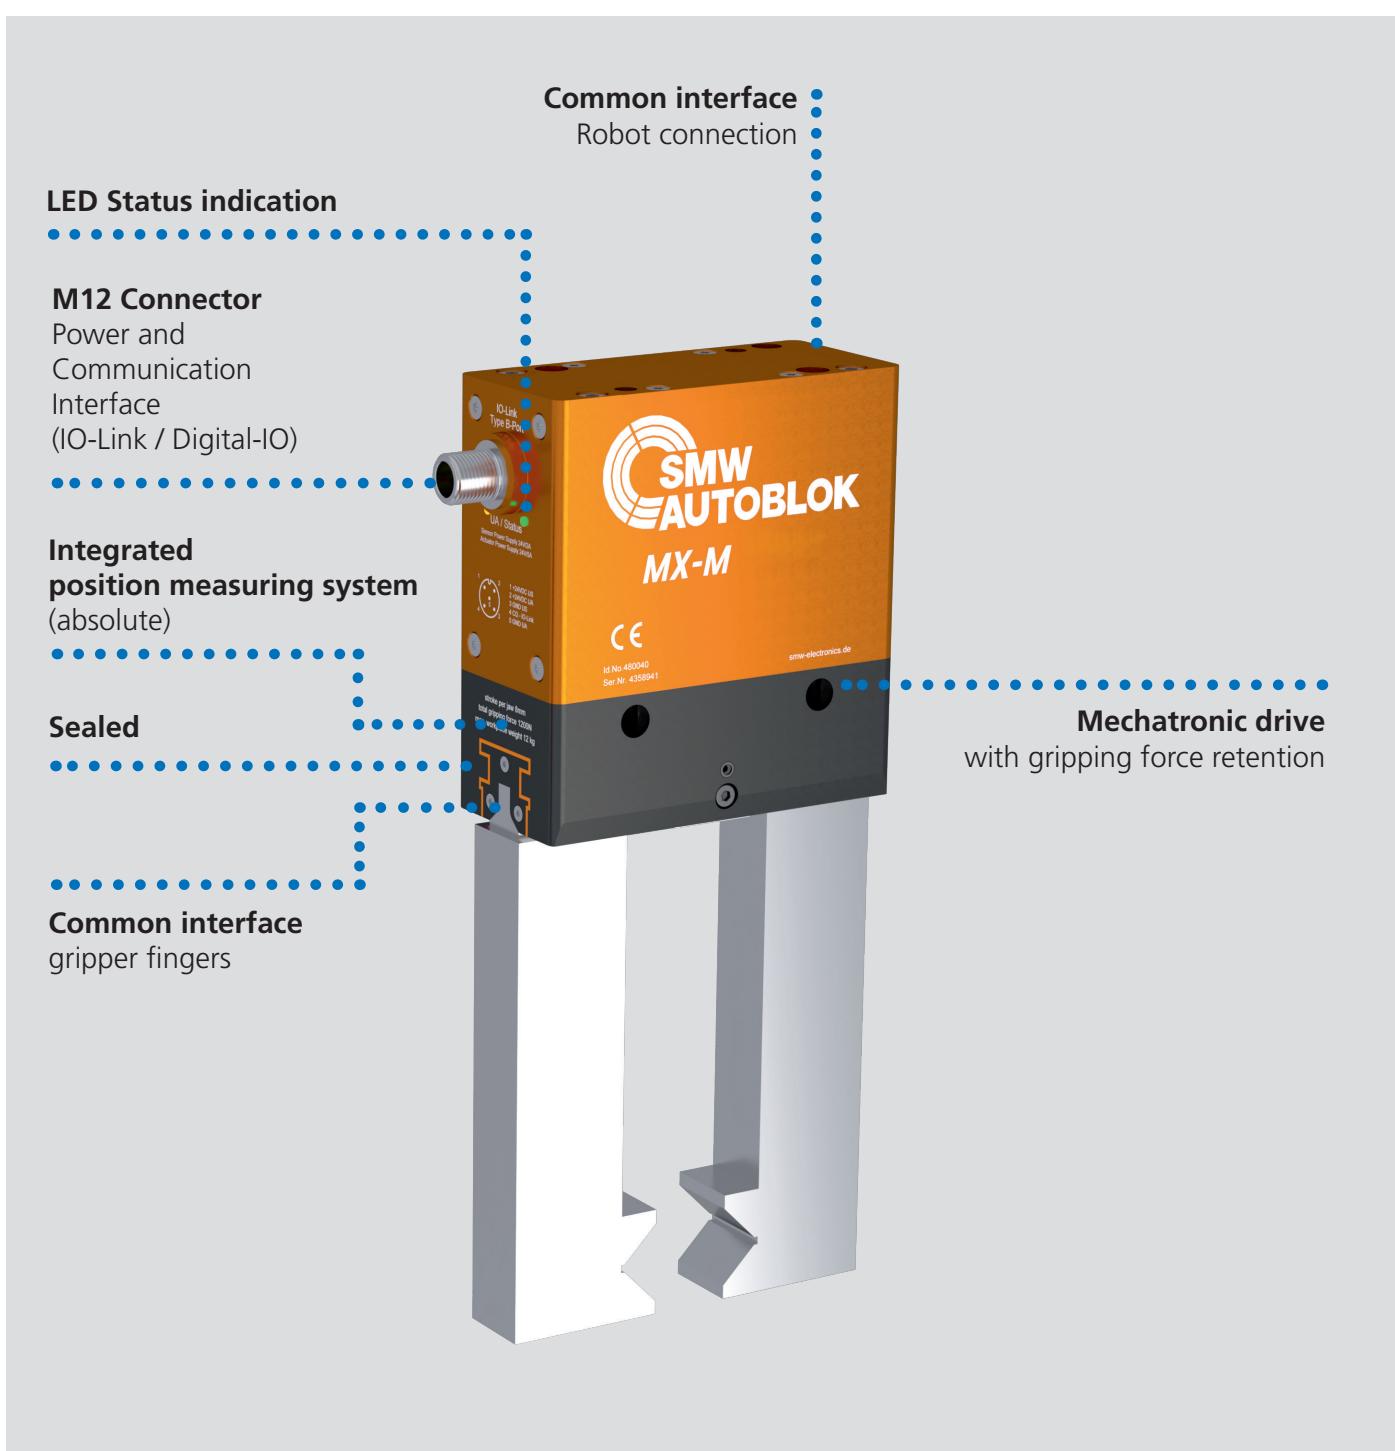
MX-M

Dimension and technical data

Mechatronic gripper

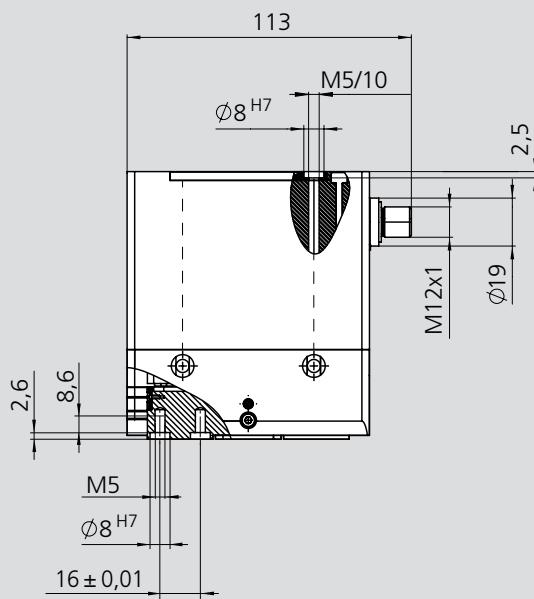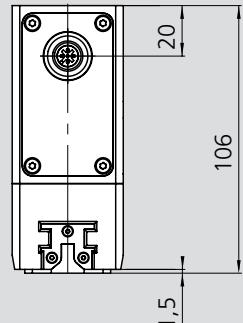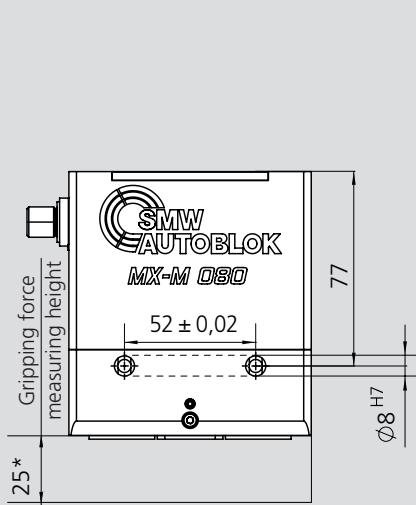


*Gripping force is the arithmetic sum of the individual forces applied each jaw at the specified distance.

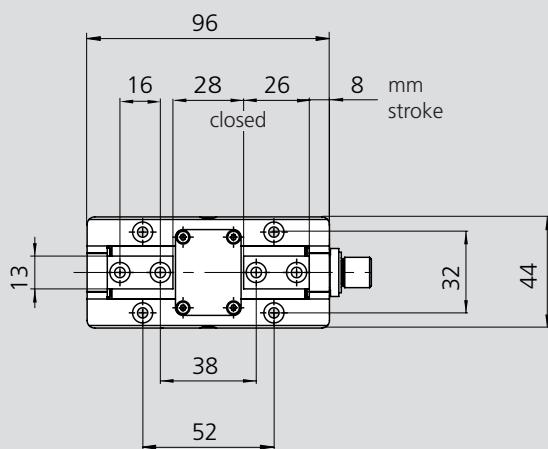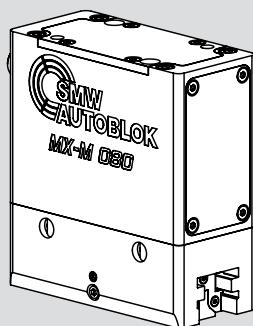

Subject to technical changes.
For more detailed information please ask our customer service.

Type	MX-M 080 IOL	MX-M 080 DIO
Id. No.	480040	480140
Gripping force	N	1.200
Stepless gripping force adjustment	N	360 - 1.200
Stroke per jaw	mm	8
Repeatability	mm	0,02
Weight	kg	1,35
Recommended workpiece weight	kg	6
Closing time	s	0,36
Opening time	s	0,36
Voltage	V	19.2 ... 30 V
Max. power consumption	A	5 A
Protection class		IP64
Signal interface	IO-Link	Digital-IO

Pin assignment M12x1 - 5 Pin A-coded Male

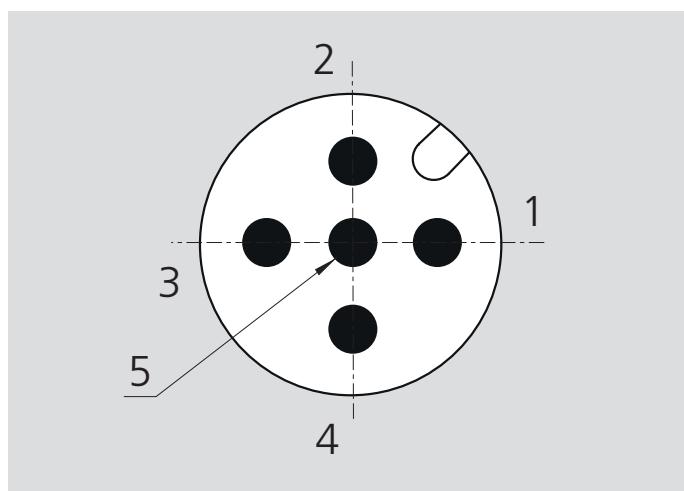

IO-Link Port B

Pin	Function	Description
1	US+	Power supply IO-Link logic 24V DC
2	UA+	Power supply actuator 24V DC
3	US-	Ground IO-Link logic
4	C/Q	IO-Link signal
5	UA-	Ground Actuator

Digital IO Interface M12-5A


Pin	Function	Description
1	+24V	Positive supply voltage
2	Opened	Digital output opened feedback
3	GND	Ground
4	Ctrl	Digital input control signal
5	Closed	Digital output closed feedback

Force and moment loading



Forces and moments

Shows static forces and moments that can act in addition to the gripping force.



Mx	max. moment in X-axis	Nm	50
My	max. moment in Y-axis	Nm	100
Mz	max. moment in Z-axis	Nm	50
Fz	max. weight force in Z-axis	N	1.200

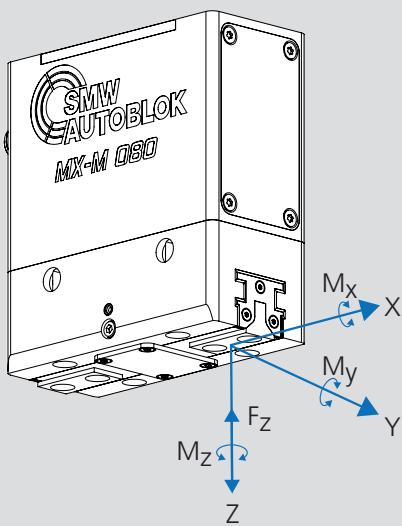

Notes

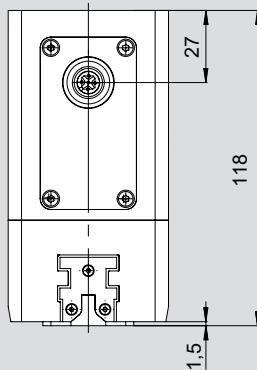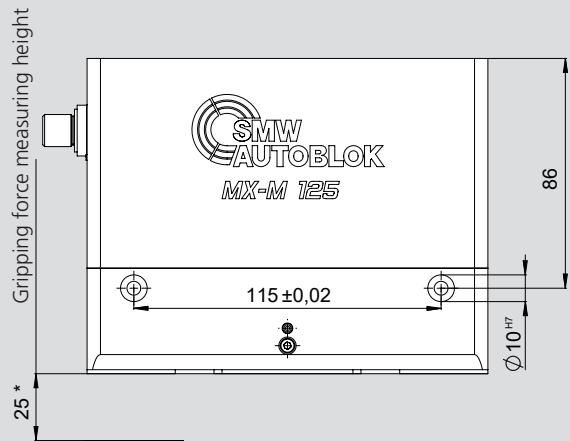


*Gripping force is the arithmetic sum of the individual forces applied each jaw at the specified distance.

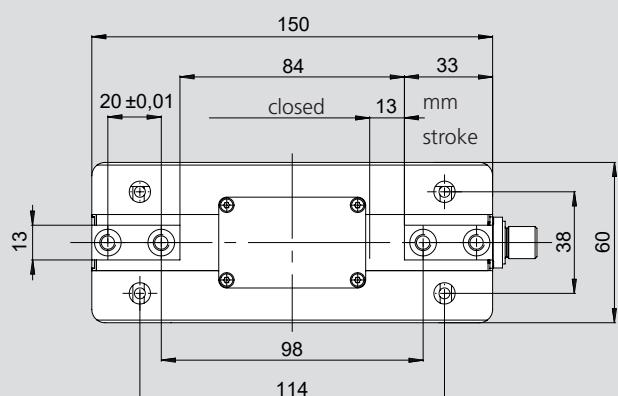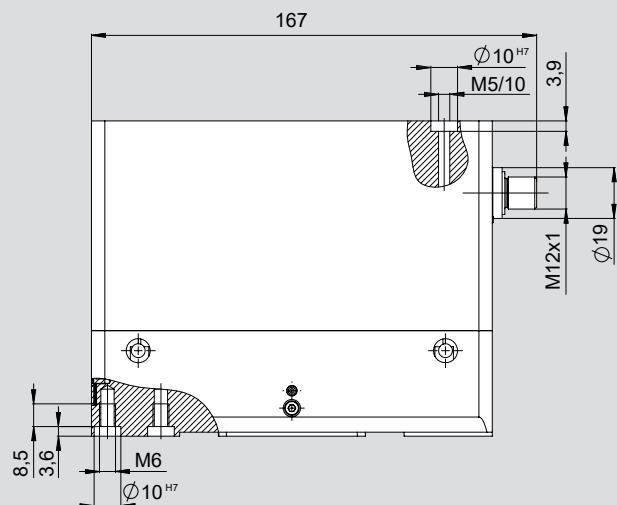

Subject to technical changes.
For more detailed information please ask our customer service.

Type	MX-M 125 IOL	MX-M 125 DIO
Id. No.	480110	480210
Gripping force	N	1.800
Stepless gripping force adjustment	N	540-1.800
Stroke per jaw	mm	13
Repeatability	mm	0,02
Weight	kg	2,7
Recommended workpiece weight	kg	9
Closing time	s	0,4
Opening time	s	0,4
Voltage	V	19,2 ... 30 V
Max. power consumption	A	5 A
Protection class		IP64
Signal interface	IO-Link	Digital-IO

Pin assignment M12x1 - 5 Pin A-coded Male

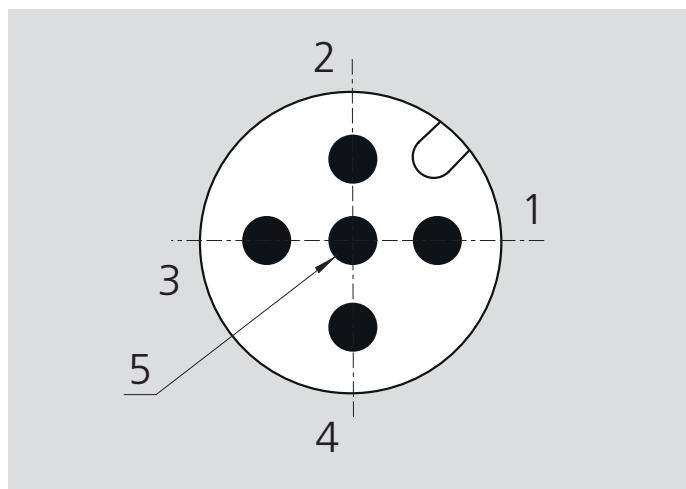

IO-Link Port B		
Pin	Function	Description
1	US+	Power supply IO-Link logic 24V DC
2	UA+	Power supply actuator 24V DC
3	US-	Ground IO-Link logic
4	C/Q	IO-Link signal
5	UA-	Ground Actuator


Digital IO Interface M12-5A		
Pin	Function	Description
1	+24V	Positive supply voltage
2	Opened	Digital output opened feedback
3	GND	Ground
4	Ctrl	Digital input control signal
5	Closed	Digital output closed feedback

Force and moment loading

Forces and moments

Shows static forces and moments that can act in addition to the gripping force.

M_x max. moment in X-axis	Nm	125 Nm
M_y max. moment in Y-axis	Nm	140 Nm
M_z max. moment in Z-axis	Nm	110 Nm
F_z max. weight force in Z-axis	N	3.000 N

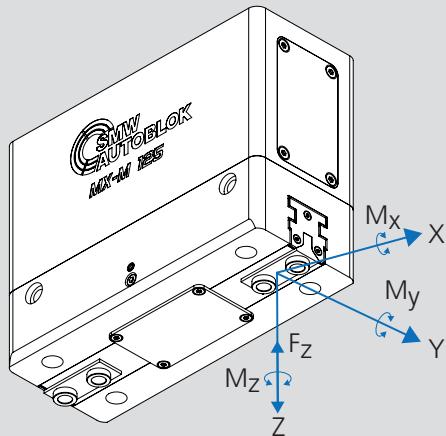

MX-U 050

Mechatronic gripper



Mechatronic universal long stroke gripper

■ 2 finger parallel

Application/customer benefits

- Universal, flexible use due to extra long stroke
- Stepless gripping force and gripping position adjustment
- Robust, compact design with an precise mechatronic drive
- Integrated, absolute position measuring system
- ID and OD clamping
- Suitable for cobot applications and pick & place tasks


Technical features

- Aluminum housing
- Protection class: IP 54 (Electronic IP 67)
- Adjustable gripping position and force
- Repeatability 0,02 mm
- Power supply 19.2 ... 30 V / 1A
- Communication interface IO-Link or RS 485
- URCap optionally available

Standard equipment




Gripper with centering sleeves (without gripper fingers and mounting bolts)

MX-U

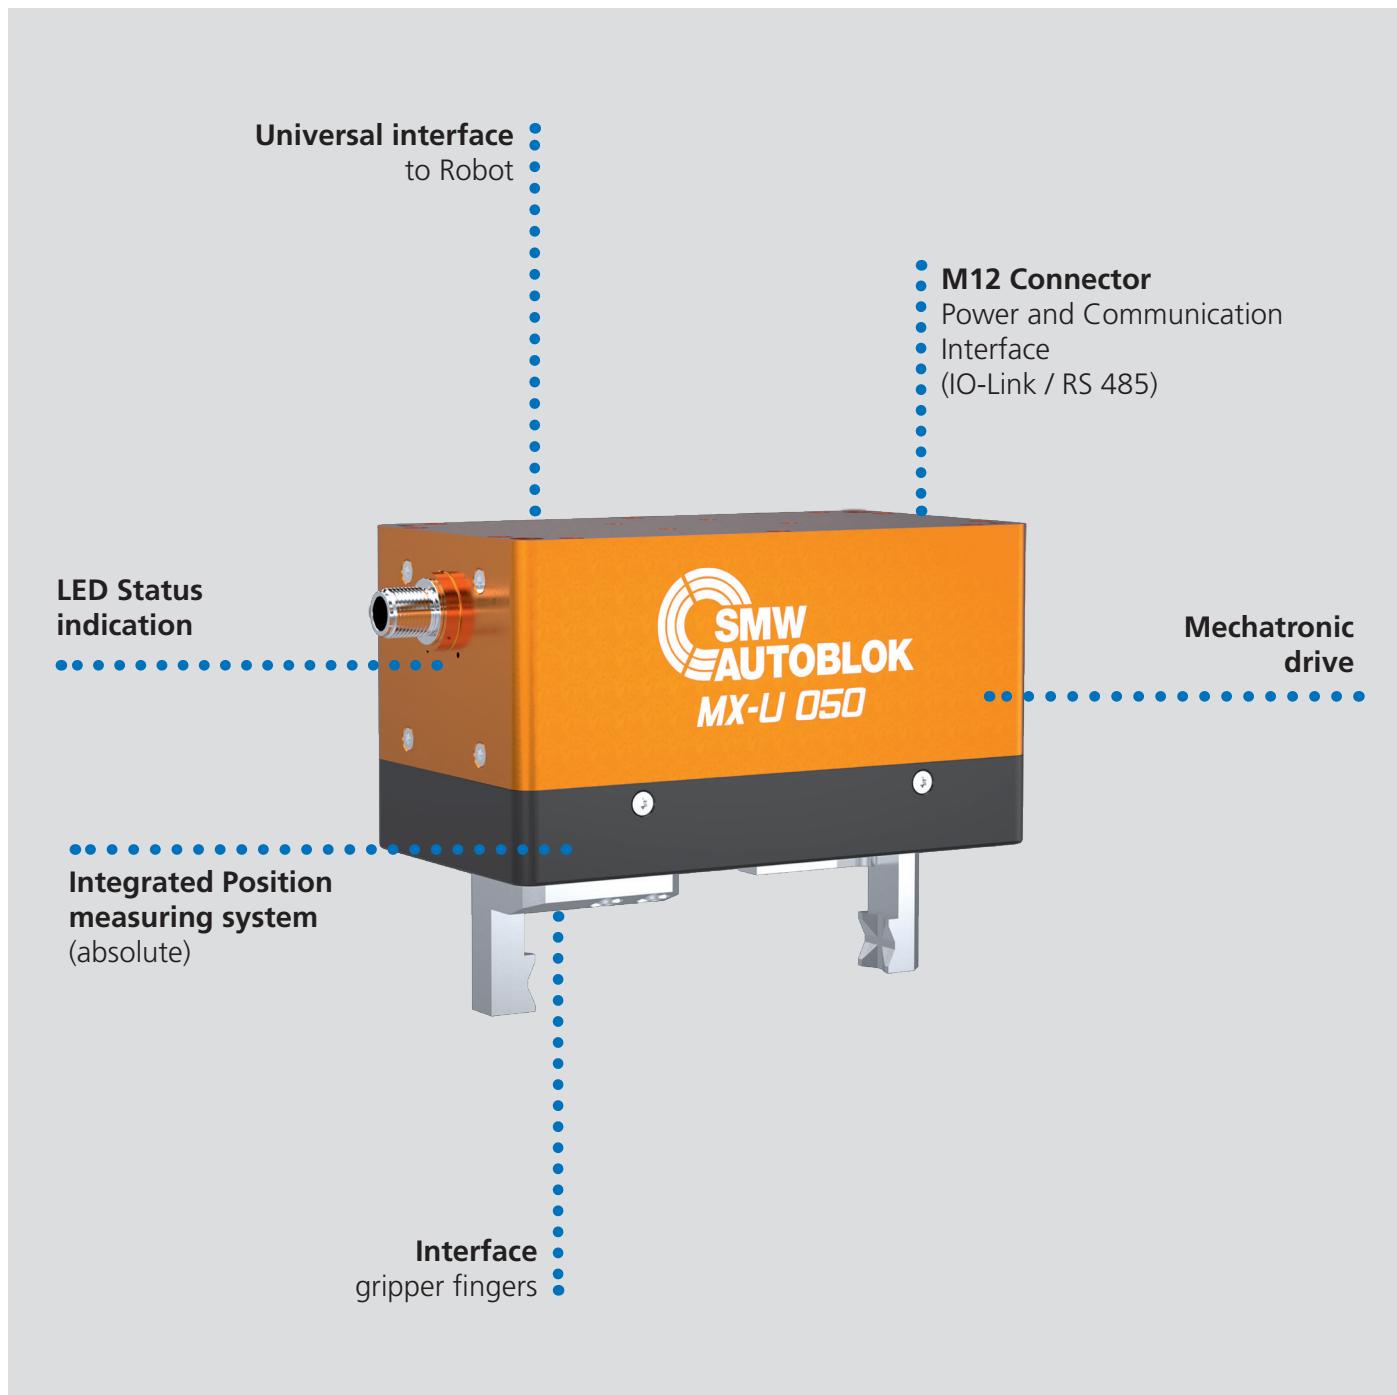

Dimension and technical data


Mechatronic gripper

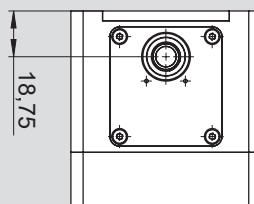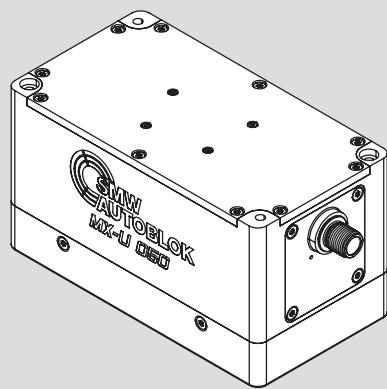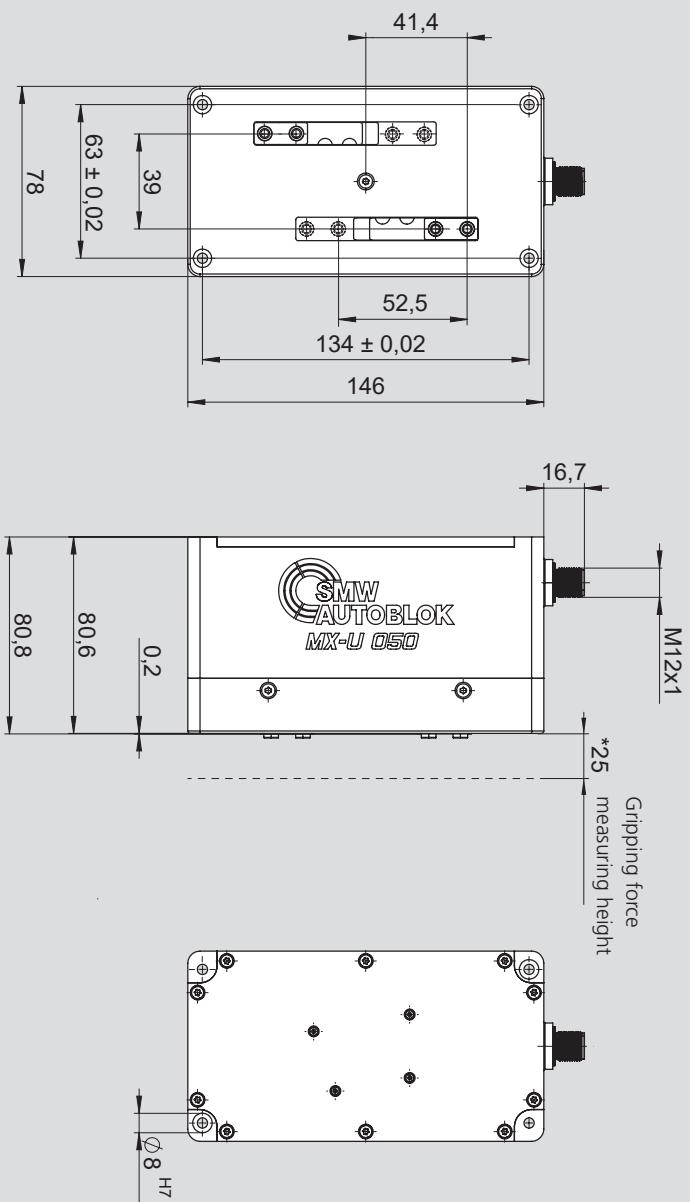

*Gripping force is the arithmetic sum of the individual forces applied on each jaw at the specified distance.

Subject to technical changes.
For more detailed information please ask our customer service.

Type	MX-U 050 IO-LINK	
Id.-No.	480270	
Gripping force	N	300
Stroke per jaw	mm	52
Repeatability	mm	0.02
Weight	kg	1.7
Max. workpiece weight	kg	1.5
Voltage	V	19.2 ... 30 V
Power consumption	A	1
Protection class mechanical		IP54
Protection class electrical		IP67

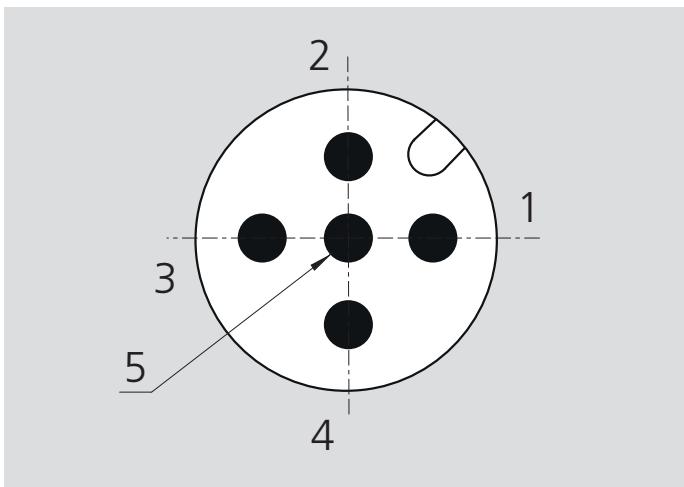Pin assignment M12x1 - 5 Pin A-coded Male

IO-Link Port B		
Pin	Function	Description
1	US+	Power supply IO-Link logic 24V DC
2	UA+	Power supply actuator 24V DC
3	GND US-	Ground IO-Link logic
4	C/Q	IO-Link signal
5	GND UA-	Ground actuator

Notes

MX-L 335 compact

Mechatronic gripper



MX-L 355 compact

Mechatronic long stroke gripper

■ 2 finger parallel

Application/customer benefits

- Gripping force independent of gripping speed and stroke
- Mechatronic drive with gripping force retention
- Gripping force 2.000 N - 27.000 N
- Position sensing and monitoring of the gripping force
- OD clamping
- Pre-positioning and sensitive gripping force adjustment

Technical features


- Aluminum housing
- Sealed/Protection class: IP67
- Repeatability: 0,02 mm
- Recommended workpiece weight up to 135 kg
- Power supply: 24 V / 7,5 A
- Communication interface: Profinet
- Possibility of safe motion shutdown by means of STO Signals (optional)

Standard equipment



Gripper (without gripper fingers, centering sleeves and mounting bolts)



Dimension and technical data

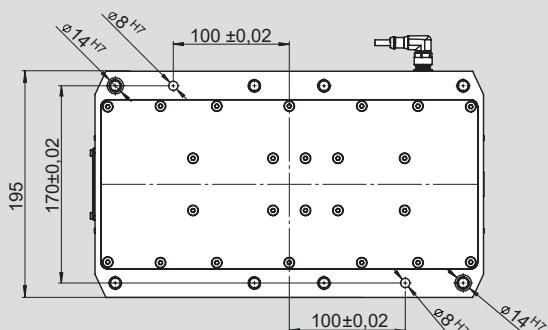


*Gripping force is the arithmetic sum of the individual forces applied each jaw at the specified distance.

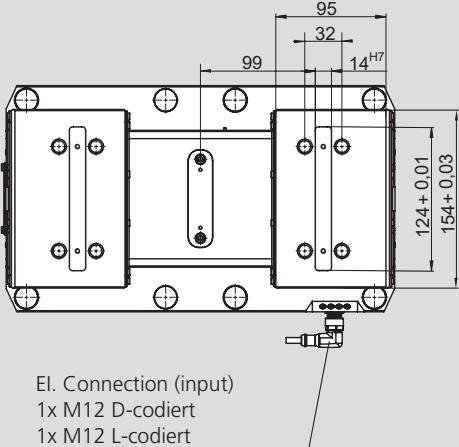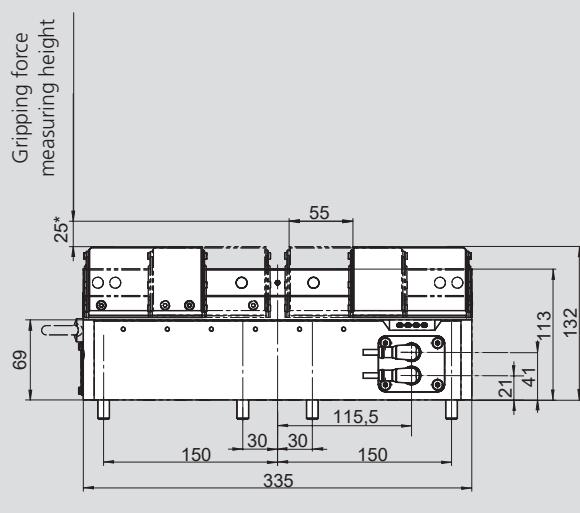


Subject to technical changes.
For more detailed information please ask our customer service.

Type	MX-L 335 compact	
	PROFINET	
Id. No.	480300	
Gripping force (steplessly adjustable)	N	2.000 - 27.000
Stroke per jaw	mm	55
Repeatability	mm	0,02
Weight	kg	32
Recommended workpiece weight	kg	135
Travel speed per jaw	mm/s	5
Voltage	V	24/48
Max. power consumption	A	7,5
Voltage	V	24 V ± 10%
Max. power consumption	A	0,5 A
Communication interface		Profinet
STO signals (option)		2

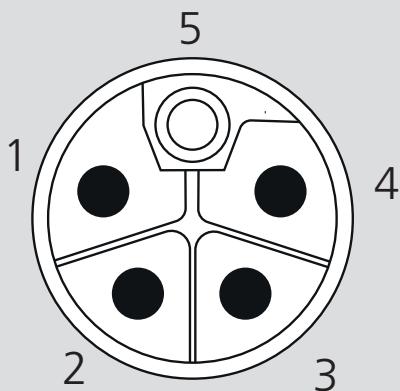Pin assignment M12x1 - 5 Pin L-coded Male

Power Interface		
Pin	Function	Description
1	US+	24V Power supply logic
2	UA+	24V/ 48V Power supply actuator
3	GND US-	Ground power supply logic
4	GND UA-	Ground power supply actuator
5	nc	-

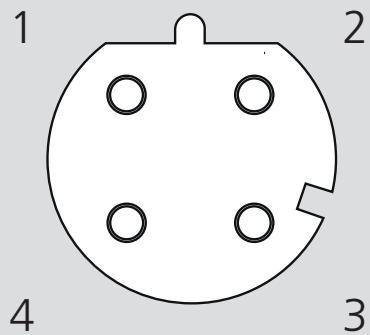Pin assignment M12x1 - 4 Pin D-coded Female

Ethernet/Profinet Interface		
Pin	Function	Description
1	Tx+	Ethernet/Profinet Tx+
2	Rx+	Ethernet/Profinet Rx+
3	Tx-	Ethernet/Profinet Tx-
4	Rx-	Ethernet/Profinet Rx-

Notes

MX-L 520

Mechatronic gripper



MX-L

Mechatronic long stroke gripper

■ 2 finger parallel

Application/customer benefits


- Gripping force independent of gripping speed and stroke
- Mechatronic drive with gripping force retention
- Gripping force up to 40.000 N
- Position sensing and monitoring of the gripping force
- OD clamping
- Pre-positioning and sensitive gripping force adjustment


Technical features

- Aluminum housing
- Sealed/Protection class: IP67
- Repeatability 0,02 mm
- Recommended workpiece weight up to 200 kg
- Power supply 48V / 10A
- Communication interface Profinet / EtherNet/IP
- Possibility of safe motion shutdown by means of STO Signals (optional)

Standard equipment

Gripper (without gripper fingers, centering sleeves and mounting bolts)

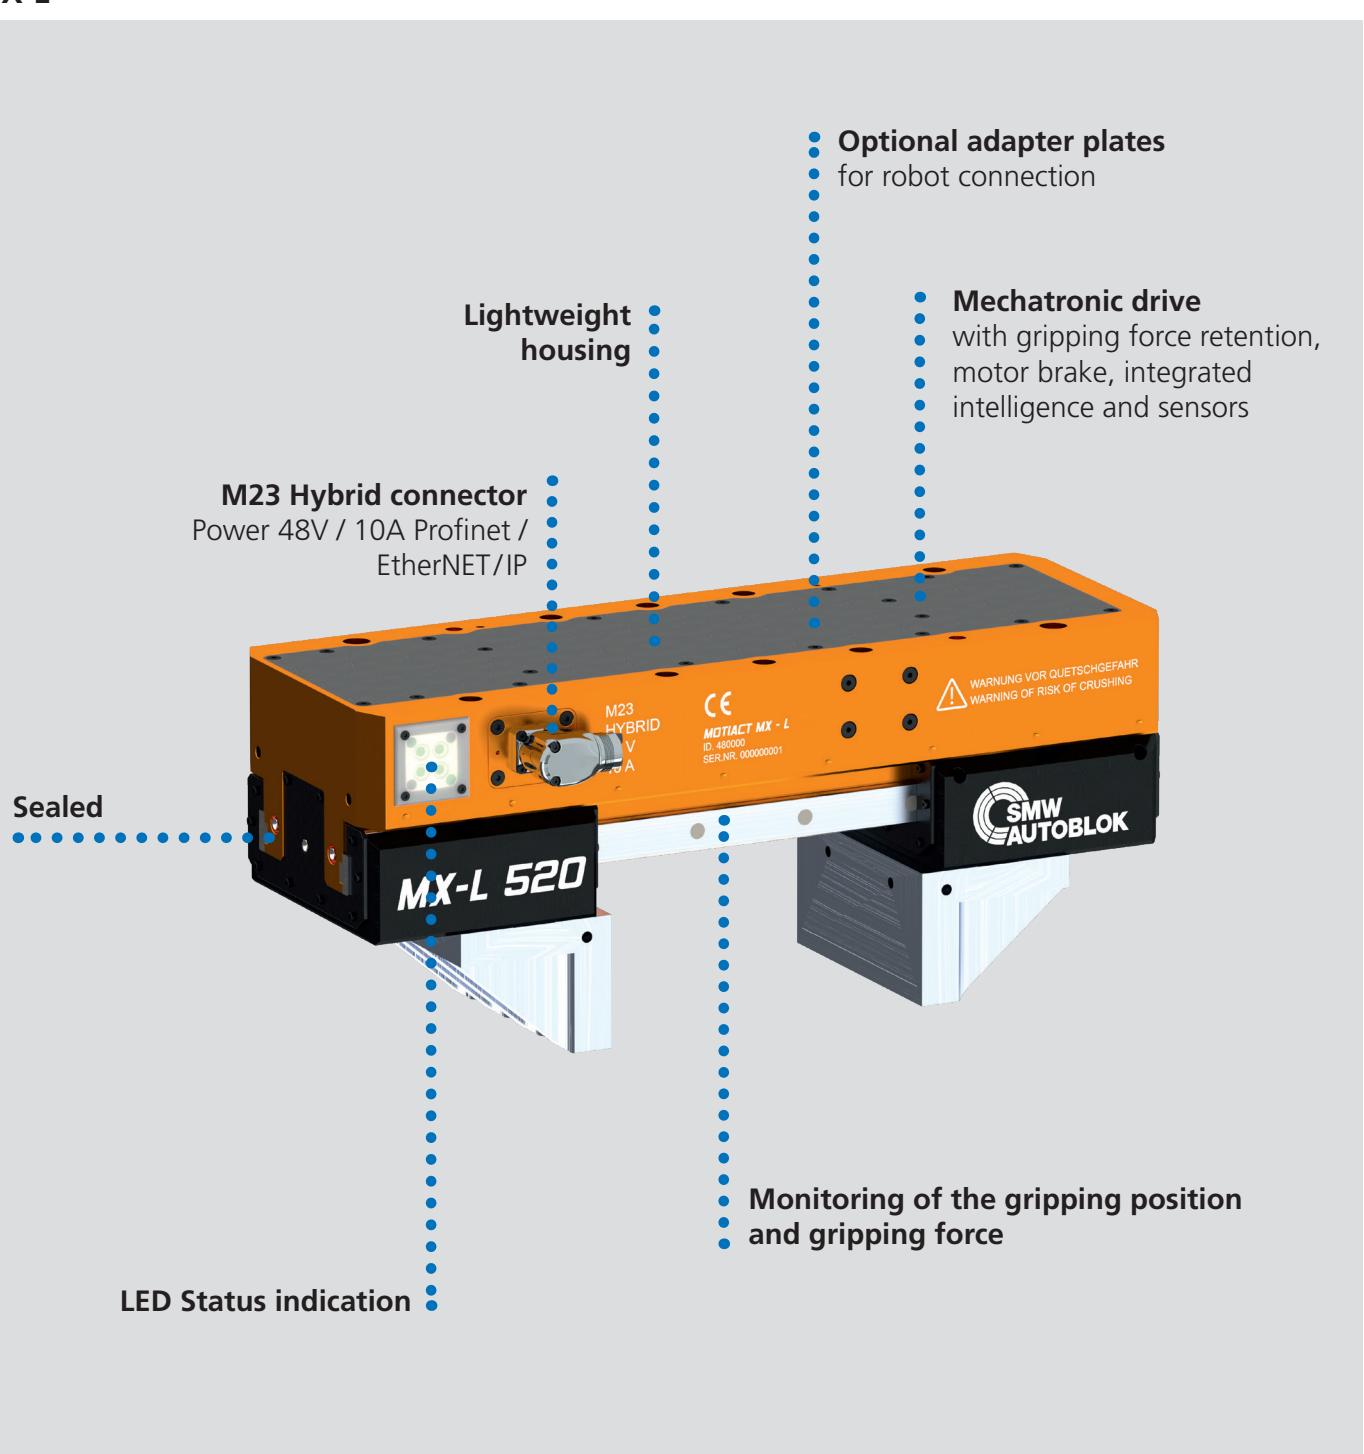

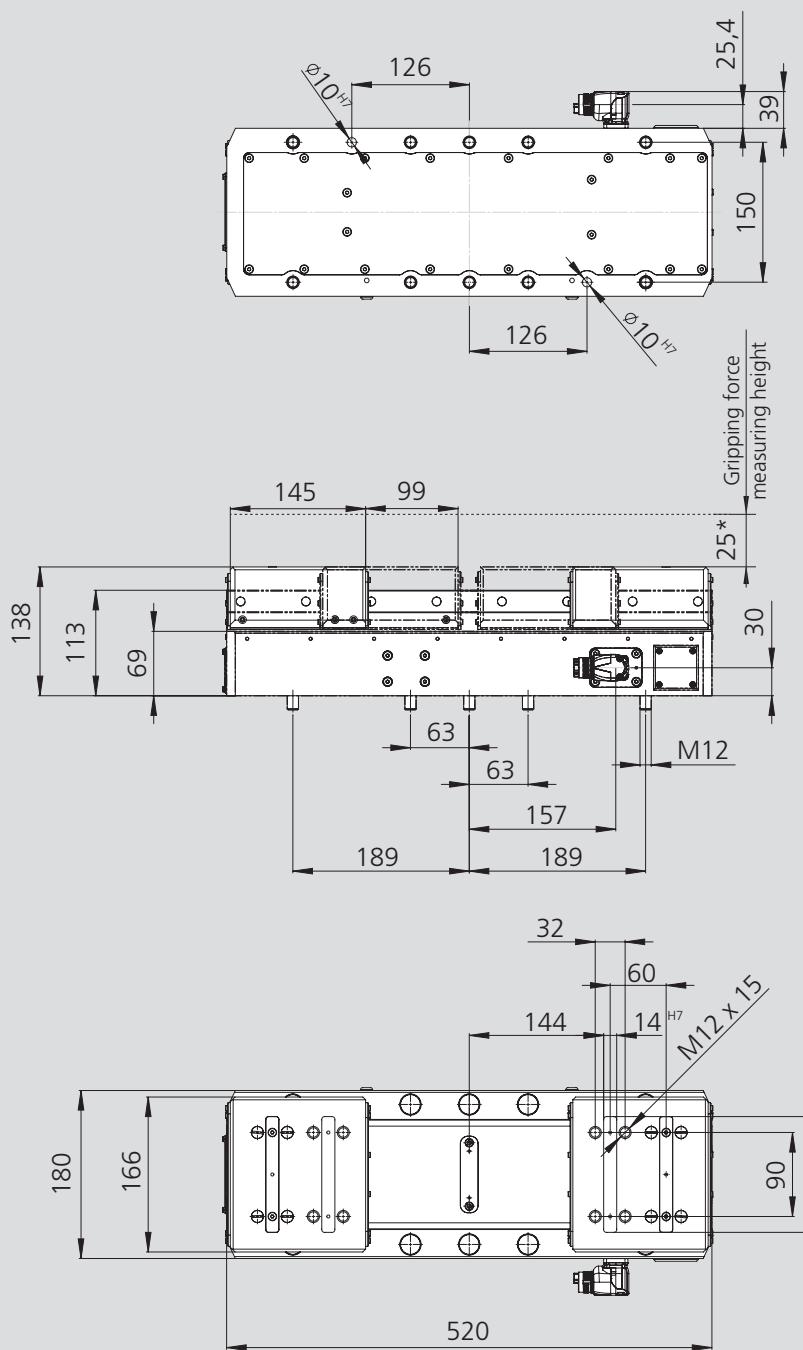


*Gripping force is the arithmetic sum of the individual forces applied each jaw at the specified distance.

Subject to technical changes.
For more detailed information please ask our customer service.

Type	MX-L 520 PROFINET	MX-L 520 ETHERNET / IP
Id. No.	480000	480200
Gripping force (steplessly adjustable)	N	10.000 - 40.000
Stroke per jaw	mm	99
Repeatability	mm	0,02
Weight	kg	42,2
Recommended workpiece weight	kg	200
Travel speed per jaw	mm/s	1,2
Voltage	V	48
Max. power consumption	A	10
Voltage	V	$24 \text{ V} \pm 10\%$
Max. power consumption	A	0.5 A
Communication interface	Profinet	EtherNET/IP
STO signals (option)		2

PIN assignment M23 hybrid plug

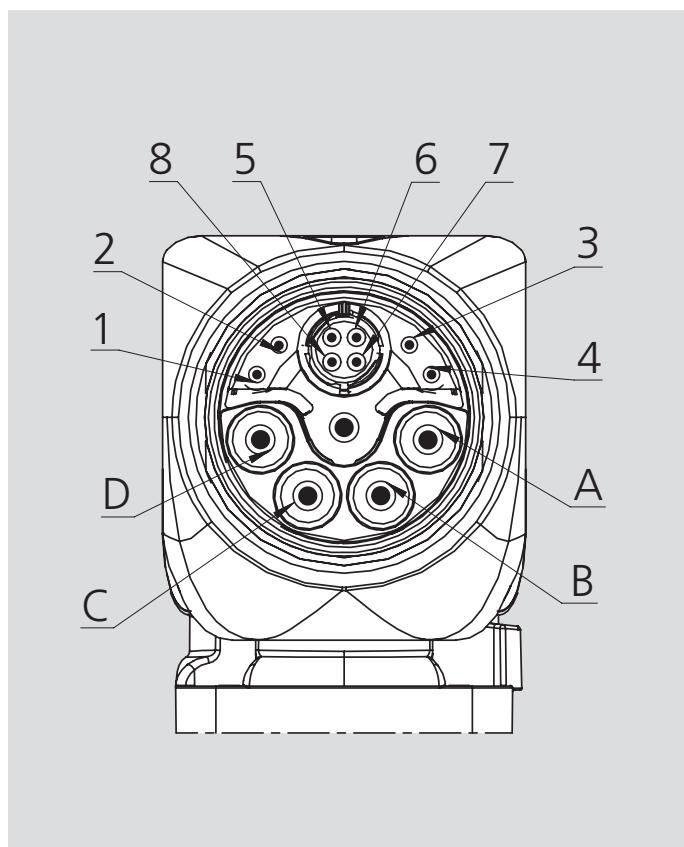


Device plug connector			
Pin	Core color	Function	Description
A	black 1	24 V	Logic Power
B	black 2	GND	Logic GND
C	black 3	48 V	Last Power
D	black 4	GND	Last GND
PE	green / yellow	Ground	Ground wire
1	violett	STO A	Safe hold A
2	brown	STO B	Safe hold B
3	green	STO GND	Safe hold GND
4	black 5	Nc	-
5	blue	Data RX-	ProfiNet
6	yellow	Data TX+	ProfiNet
7	white	Data RX+	ProfiNet
8	orange	Data TX-	ProfiNet

Force and moment loading

Forces and moments

Shows static forces and moments that can act in addition to the gripping force.

Mx max. torque in X axis	Nm	1.200
My max. torque in Y axis	Nm	2.900
Mz max. torque in Z axis	Nm	1.200
Fz max. effective weight in Z-axis	daN	400

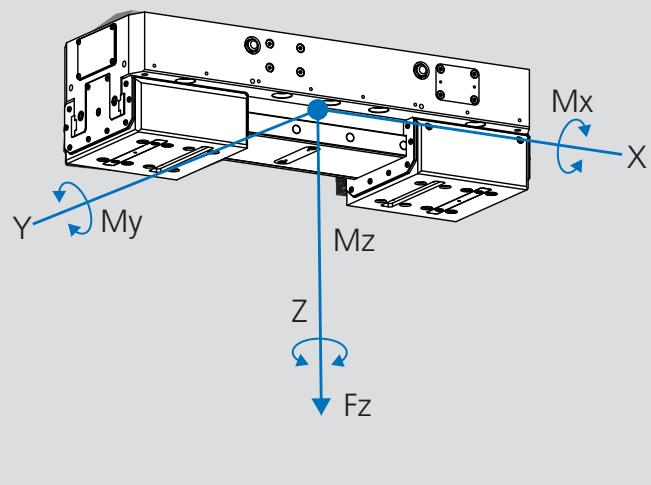

Notes

Pneumatic Grippers

Overview

ADVANTAGES

- Protection class: IP64 (IP40=2PXS, 3PXS)
- 2PXS/2PXM/2PXL: Highly efficient power density thanks to optimum oval piston geometry:
 - High gripping force
 - Compact design
 - Light weight (Aluminum housing)
- Gripping force maintained via spring assembly or pressure retention (optional)
- Extended sensor package:
 - C-slot magnetic sensors for piston position monitoring
 - Inductive proximity switches for end position monitoring
 - Gripping position monitoring
- Interchangeable with most existing universal grippers
- Universal grippers PP pneumatic or hydraulic actuated
- Gripper fingers screw-on pattern, optionally via centering sleeves or groove
- Sizes PL-L 320 and 380 with gripper finger quick-change system RR



Sensor package
(optional)

2PXS/ 2PXM/ 2PXL



UNIVERSAL GRIPPERS

- 2 finger parallel
- Pneumatic actuated
- Aluminum housing
- Maximum power density
- Sealed
- Extensive sensor accessories package

3PXS/ 3PXM/ 3PXL




CENTRIC GRIPPERS

- 3 finger centric
- Pneumatic actuated
- Aluminum housing
- Sealed
- Extensive sensor accessories package



PP



UNIVERSAL GRIPPERS

- 2 finger parallel
- Pneumatic/hydraulic actuated
- Rigid steel housing
- Sealed

PL-N/L RR 320/380

UNIVERSAL GRIPPERS

- Automated gripper finger change
- Aluminum housing

GENERAL NOTES FOR ALL PNEUMATIC GRIPPERS!

Gripping force is the arithmetic sum of the individual force applied to each jaw at distance on the drawing.

Repeat accuracy is defined as a distribution of the end Position for 100 consecutive strokes.

Recommended workpiece weight is calculated for force-fit gripping with a coefficient of static friction of 0,1 and a safety factor of 2 against workpiece slippage at acceleration due to gravity g. For form-fit or capture gripping, there are significantly higher permissible workpiece weights.

Closing and opening times are movement times of the base jaws only, without application-specific gripper fingers.

Valve switching times, hose fill times, or PLC reaction times are not included, and are to be considered when cycle times are calculated.

2PXM 125 in Robot application

Highly efficient power density

- High gripping force
- Compact design
- Low weight

Preparation end position monitoring

or
position monitoring
by means of
inductive sensors
IPS 4.0

- A6 +

Connections


open/close

(also at the bottom)

Stable guide
and sealed

Mounting

for C-slot sensors

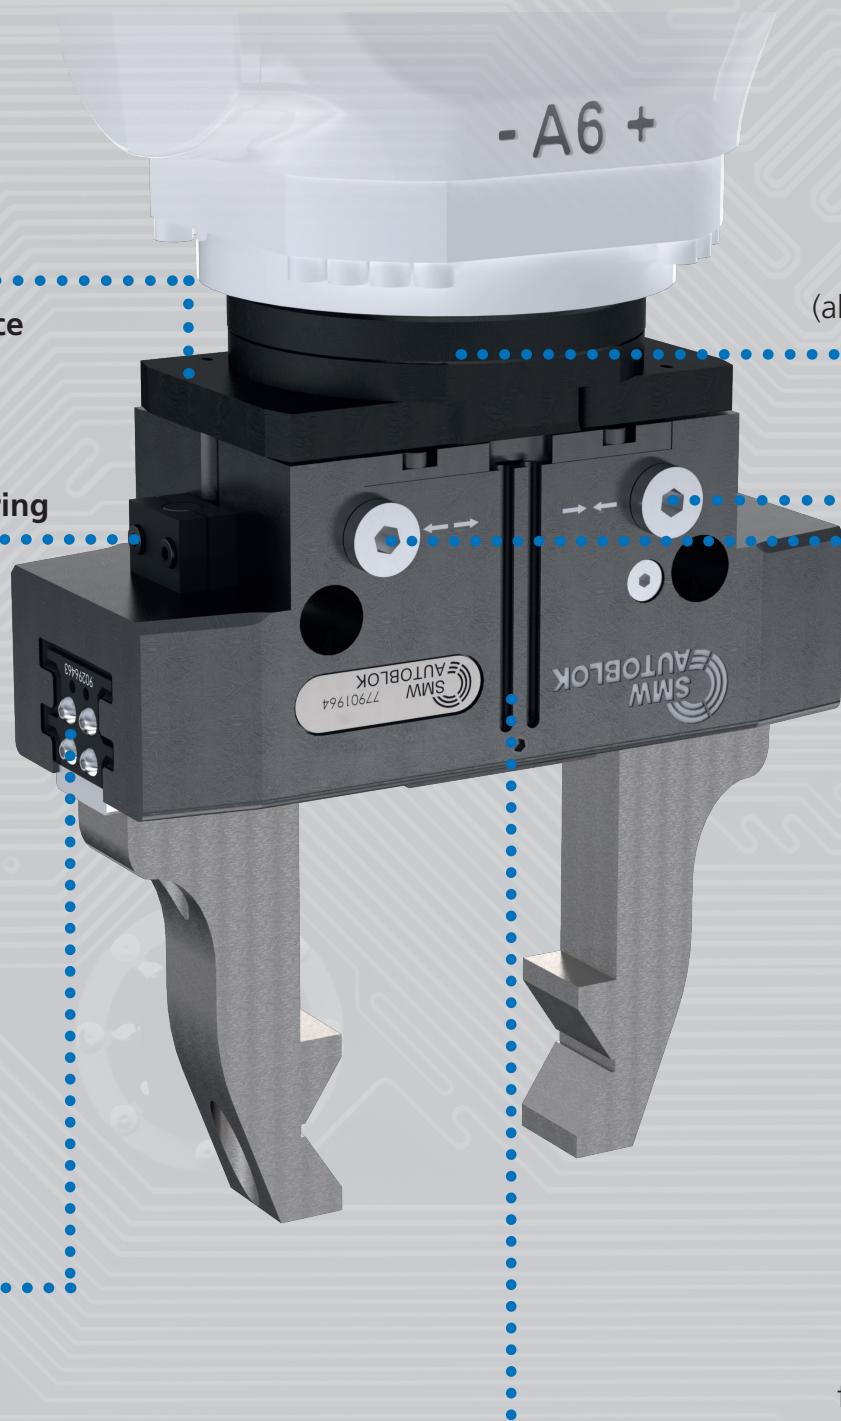

■ 2 finger parallel**Application/customer benefits**


- Compact, lightweight design and high gripping force thanks to optimized oval piston geometry
- Gripping force retention (LSI/LSE, NSE/NSI)
- ID and OD clamping
- Side or rear feeding
- Compatible with commercially available grippers

Technical features

- Aluminum housing
- Protection class: IP40
- Functional parts heat-treated for high precision and long life
- Highest rigidity and Repeatability: 0,01 mm
- Prepared for air purge
- Optional: Sensor package for gripping position / end position monitoring (IPS 4.0)




Standard equipment

Gripper with centering sleeves and mounting bolts (without gripper fingers and sensors)


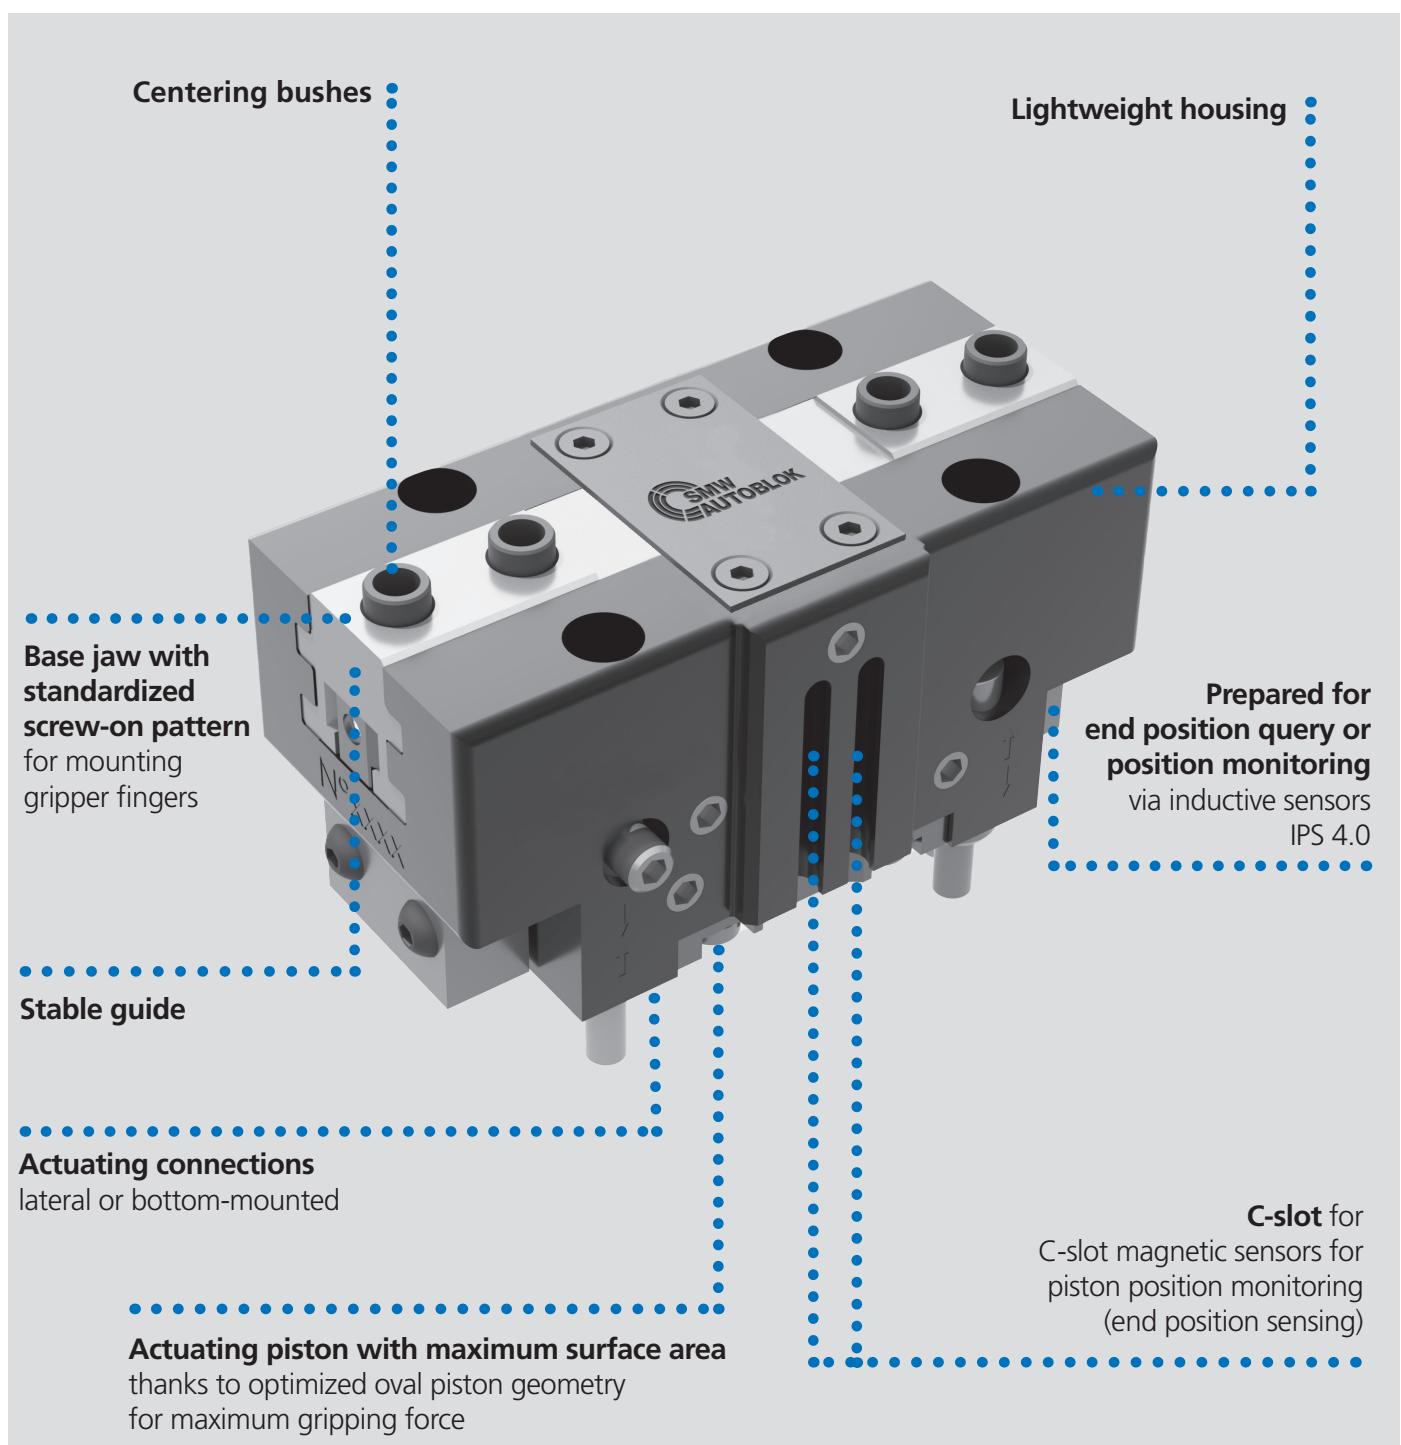
2PXS

Dimension and technical data

Pneumatic gripper

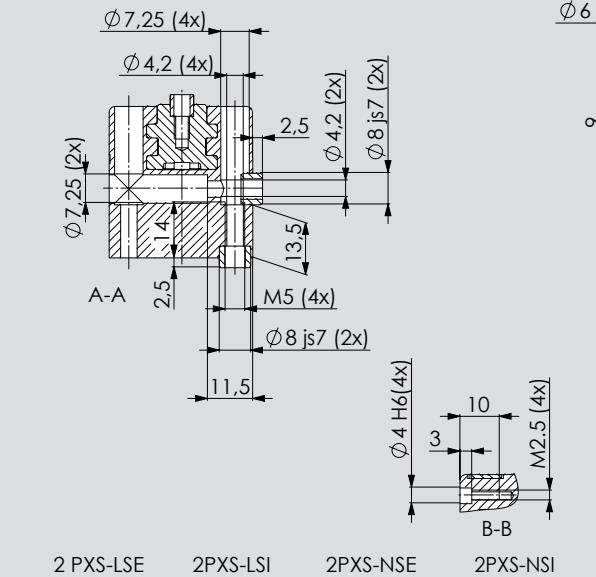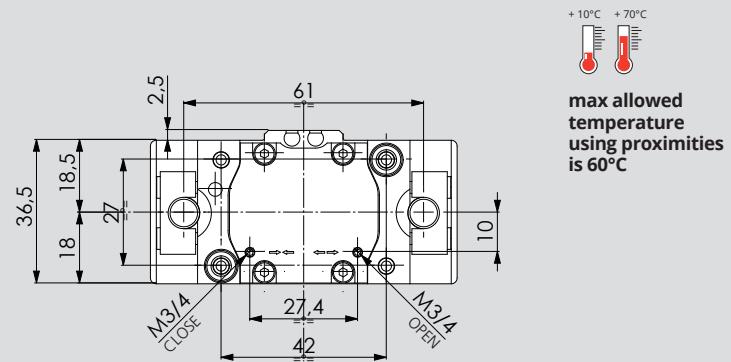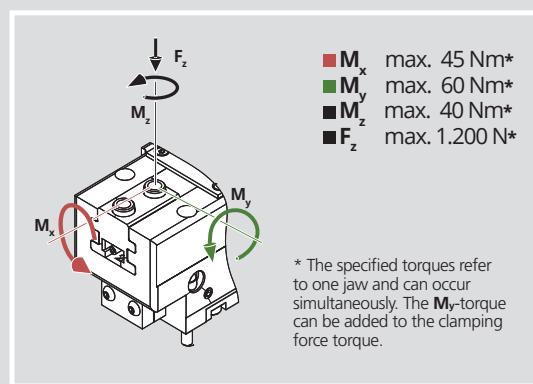

2 PXS-LSE 2PXS-LSI 2PXS-NSE 2PXS-NSI

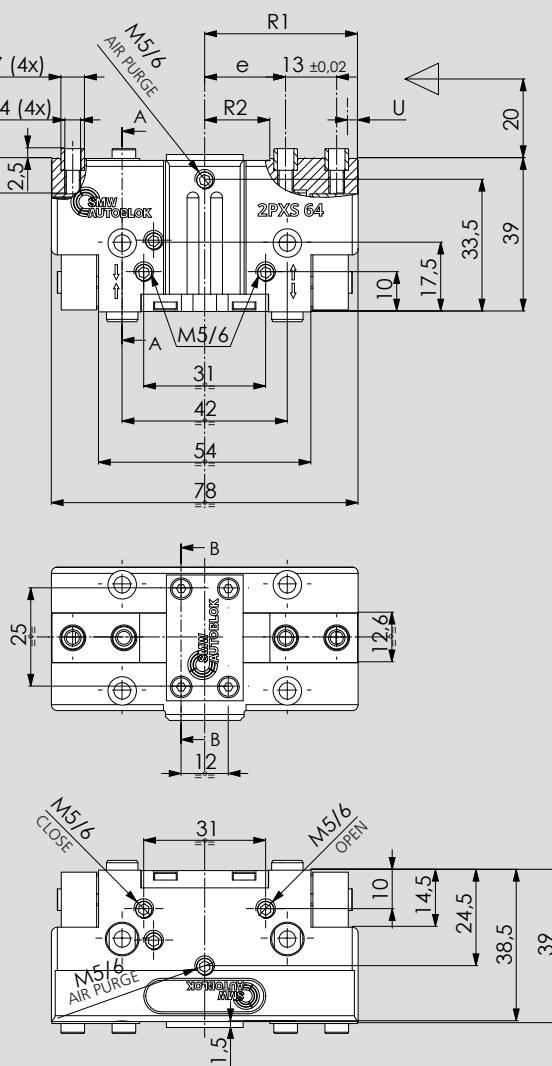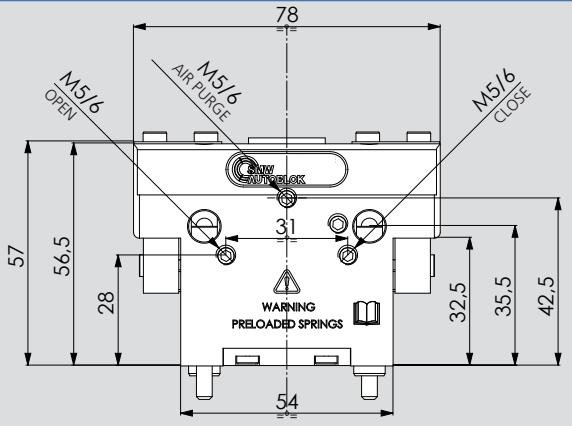

Subject to technical changes.

For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
2PXS-N 64	77901856	630	-----	3	8	2/8	0,03/0,03	0,3	3,0	14,25/17,25	36/39	10/13
2PXS-NSE 64	77902056	930	300	3	17	4/6,5	0,04/0,02	0,38	3,0	14,25/17,25	36/39	10/13
2PXS-NSI 64	77901156	1.010	300	3	18,5	4/6,5	0,02/0,04	0,38	3,0	14,25/17,25	36/39	10/13
2PXS-L 64	77901956	300	-----	6	8	2/8	0,03/0,03	0,3	1,5	14,25/20,25	36/39	10/16
2PXS-LSE 64	77902156	440	140	6	17	4/6,5	0,04/0,02	0,38	1,5	14,25/20,25	36/39	10/16
2PXS-LSI 64	77901256	480	140	6	18,5	4/6,5	0,02/0,04	0,38	1,5	14,25/20,25	36/39	10/16



LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

2PXS 80





Pneumatic gripper

Universal gripper

Dimension and technical data

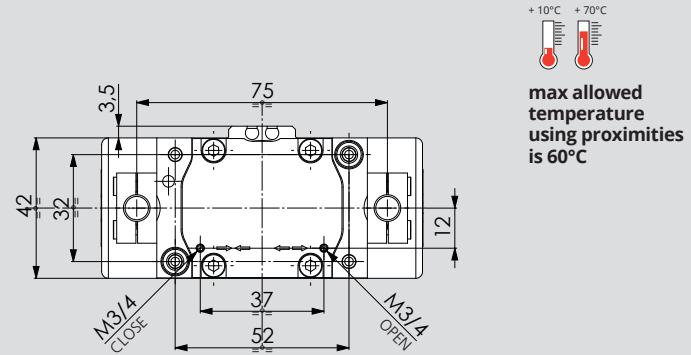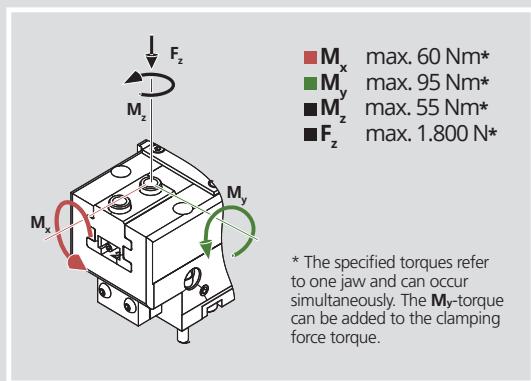

+ 10°C + 70°C
max allowed temperature using proximities is 60°C

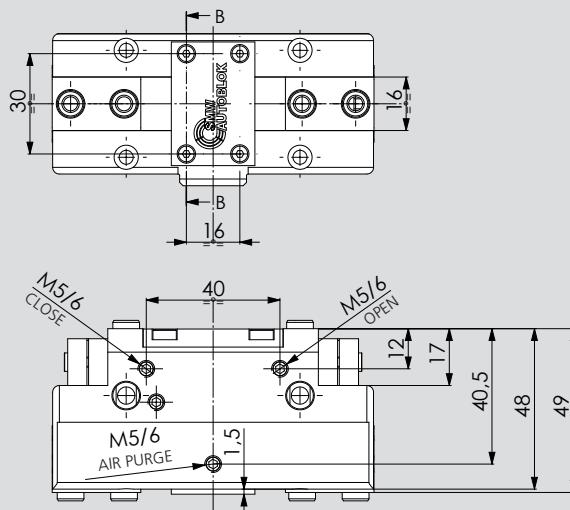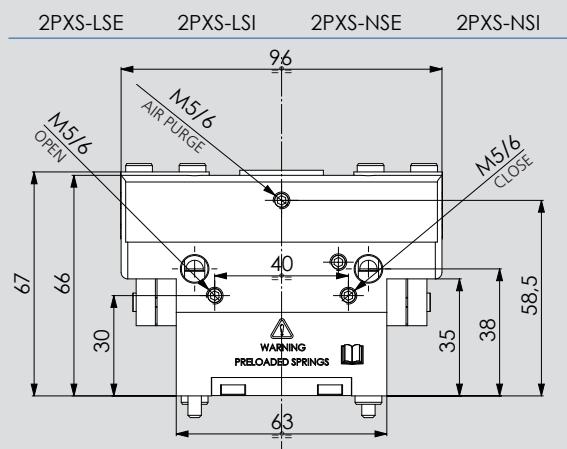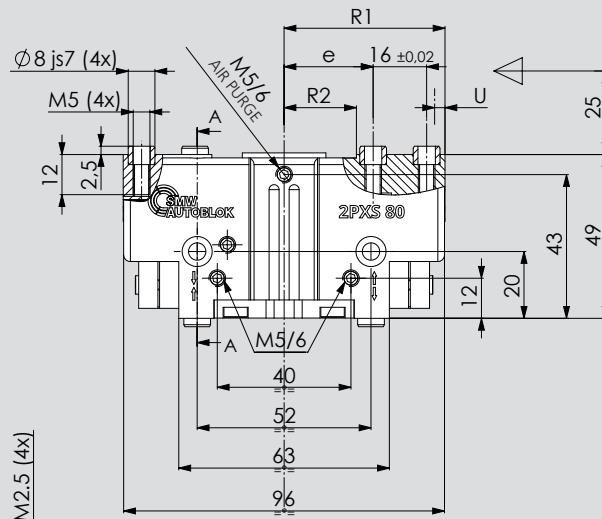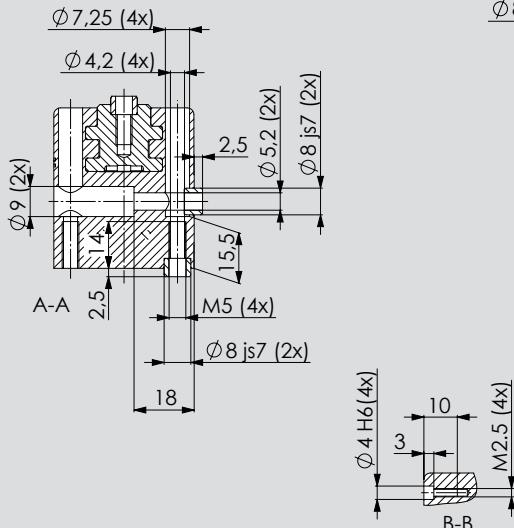

Subject to technical changes.





For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stoke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
2PXS-N 80	77901858	970	----	4	17	2/8	0,04/0,04	0,55	5,0	18,75/22,5	44/48	13,5/17,5
2PXS-NSE 80	77902058	1.290	320	4	31	4/6,5	0,05/0,03	0,65	5,0	18,75/22,5	44/48	13,5/17,5
2PXS-NSI 80	77901158	1.410	320	4	33	4/6,5	0,03/0,05	0,65	5,0	18,75/22,5	44/48	13,5/17,5
2PXS-L 80	77901958	460	----	8	17	2/8	0,04/0,04	0,55	2,5	18,75/26,5	40/48	13,5/21,5
2PXS-LSE 80	77902158	610	150	8	31	4/6,5	0,05/0,03	0,65	2,5	18,75/26,5	40/48	13,5/21,5
2PXS-LSI 80	77901258	670	150	8	33	4/6,5	0,03/0,05	0,65	2,5	18,75/26,5	40/48	13,5/21,5



LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

Dimension and technical data

Pneumatic gripper

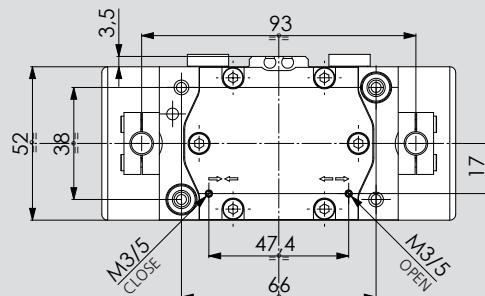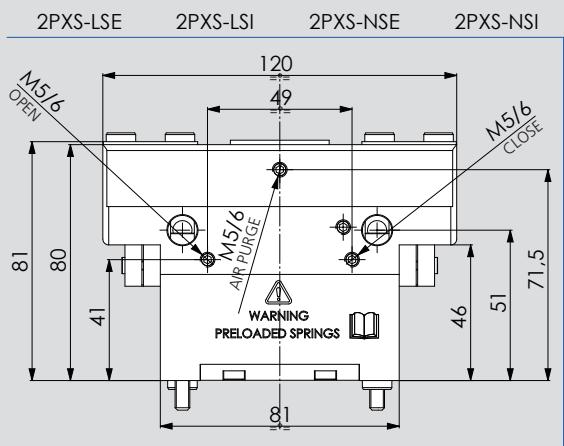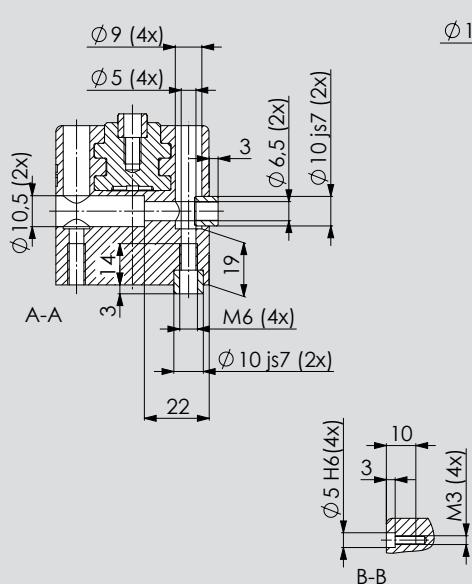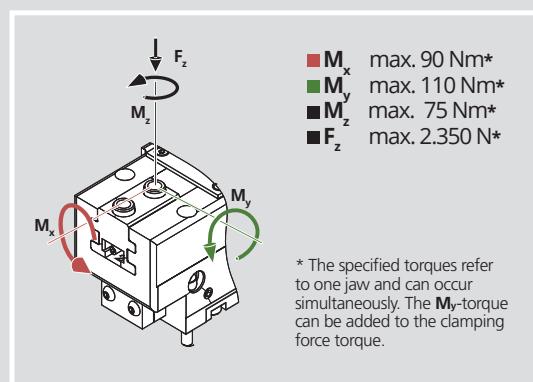

+ 10°C + 70°C
 max allowed temperature using proximities is 60°C

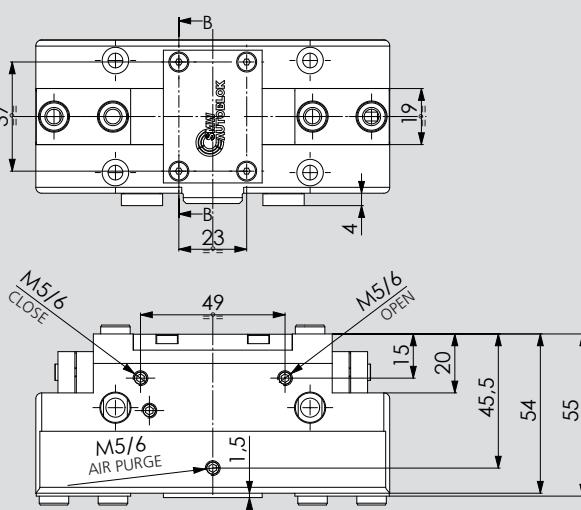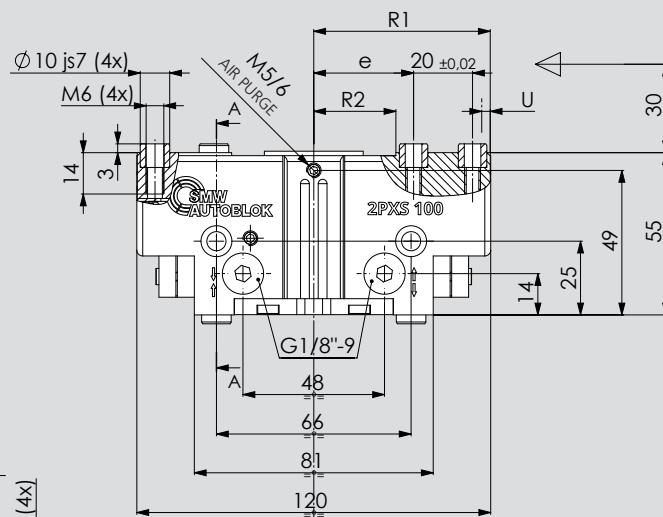

Subject to technical changes.
For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
2PXS-N 100	77901860	1.550	-----	5	33,5	2/8	0,07/0,07	0,93	8,0	23,5/28,5	55/60	17,5/22,5
2PXS-NSE 100	77902060	2.290	740	5	67	4/6,5	0,1/0,05	1,2	8,0	23,5/28,5	55/60	17,5/22,5
2PXS-NSI 100	77901160	2.450	740	5	71	4/6,5	0,05/0,1	1,2	8,0	23,5/28,5	55/60	17,5/22,5
2PXS-L 100	77901960	730	-----	10	33,5	2/8	0,07/0,07	0,93	4,0	23,5/33,5	50/60	17,5/27,5
2PXS-LSE 100	77902160	1.080	350	10	67	4/6,5	0,1/0,05	1,2	4,0	23,5/33,5	50/60	17,5/27,5
2PXS-LSI 100	77901260	1.160	350	10	71	4/6,5	0,05/0,1	1,2	4,0	23,5/33,5	50/60	17,5/27,5

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

2PXM

Pneumatic gripper



Universal gripper

■ 2 finger parallel

Application/customer benefits

- Compact, lightweight design and high gripping force thanks to optimized oval piston geometry
- Gripping force retention (LSI/LSE, NSE/NSI)
- ID and OD clamping
- Side or rear feeding
- Compatible with commercially available grippers


Technical features

- Aluminum housing
- Protection class: IP64
- Functional parts heat-treated for high precision and long life
- Highest rigidity and repeatability: 0,02 mm
- Prepared for Air purge
- Optional: Sensor package for gripping position / end position monitoring (IPS 4.0)

Standard equipment


Gripper with centering sleeves and mounting bolts (without gripper fingers and sensors)

2PXM





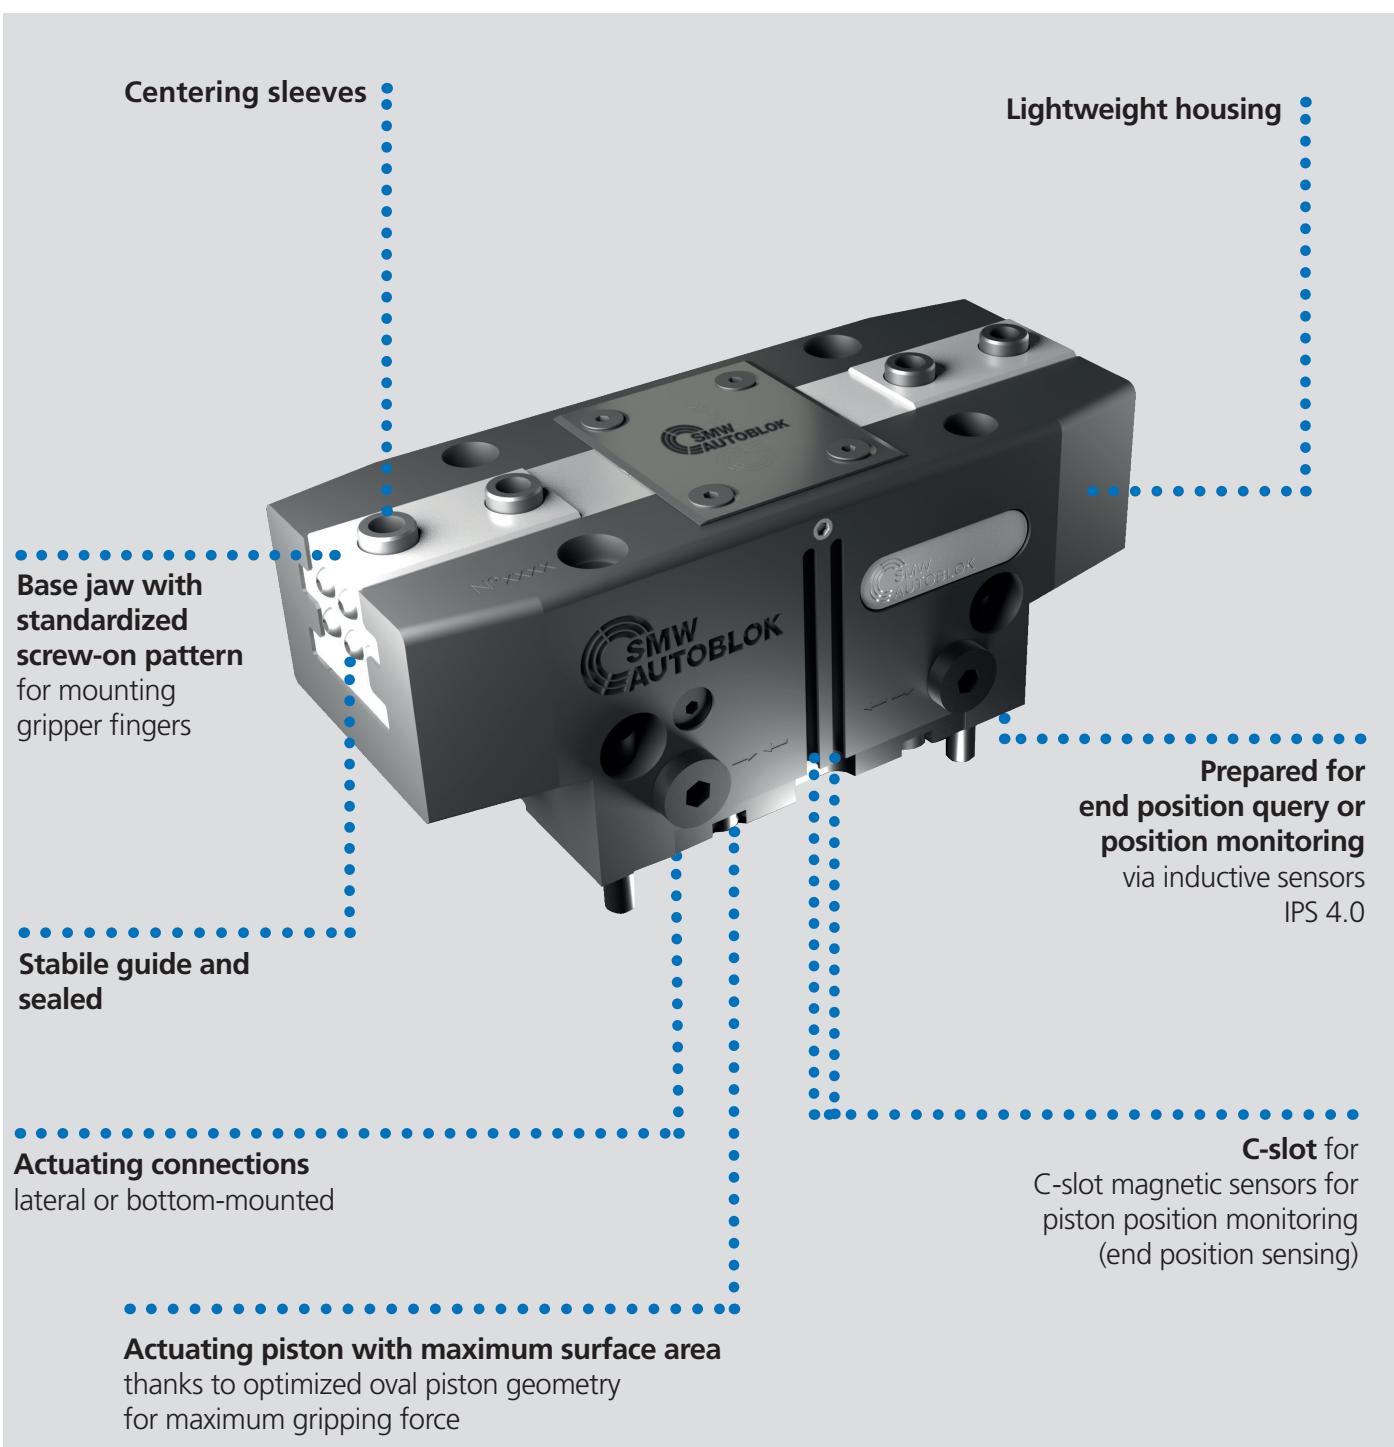


Dimension and technical data

Pneumatic gripper

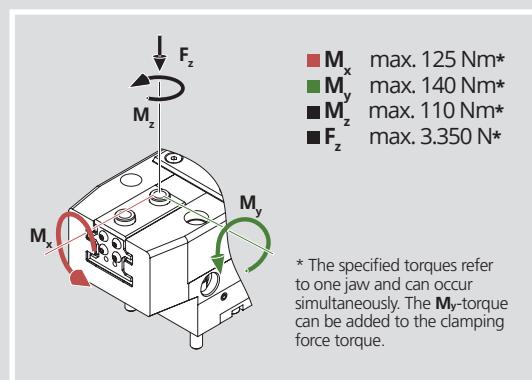

+ 10°C + 70°C
 max allowed temperature using proximities is 60°C

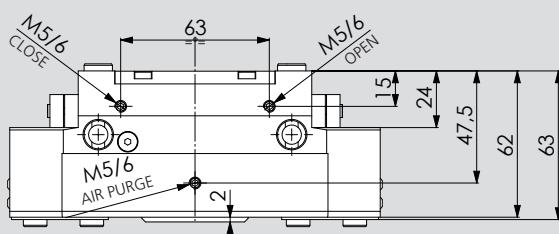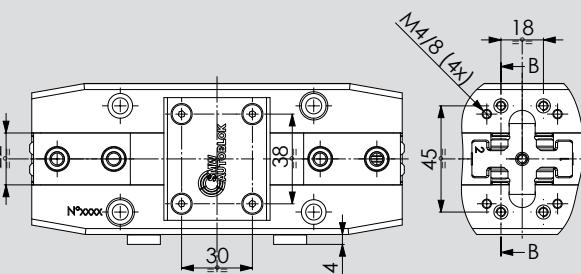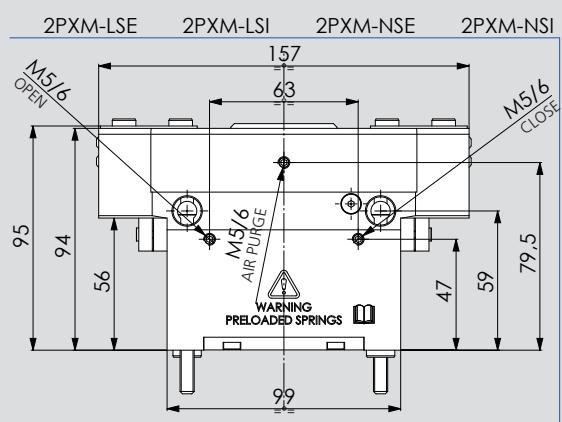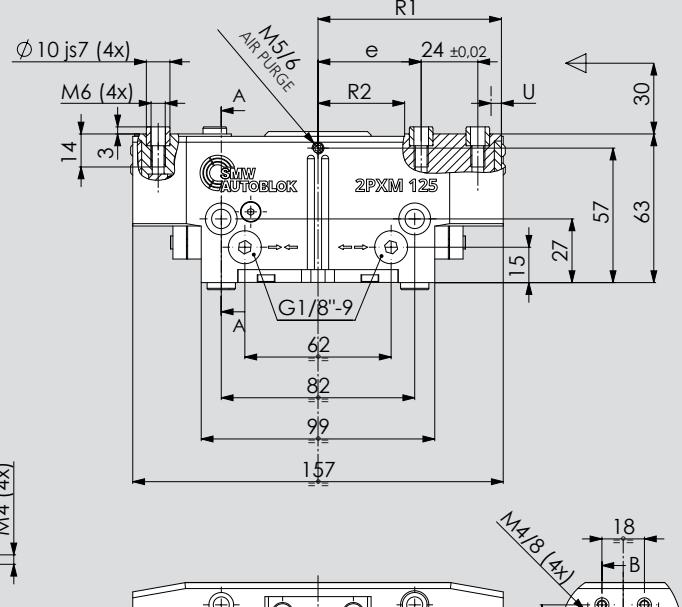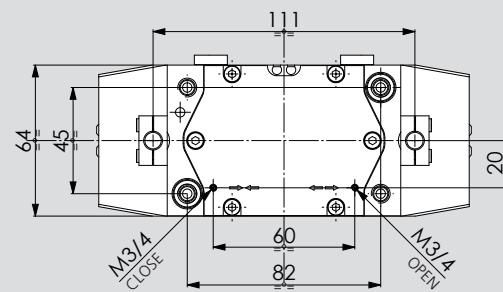

Subject to technical changes.
 For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
2PXM-N 125	77901864	2.800	----	6	79	2/8	0,1/0,1	1,6	14,0	30,5/36,5	71,5/77,5	23,5/29,5
2PXM-NSE 125	77902064	3.900	1.100	6	151	4/6,5	0,12/0,08	2	14,0	30,5/36,5	71,5/77,5	23,5/29,5
2PXM-NSI 125	77901164	4.070	1.100	6	157	4/6,5	0,08/0,12	2	14,0	30,5/36,5	71,5/77,5	23,5/29,5
2PXM-L 125	77901964	1.320	----	13	79	2/8	0,1/0,1	1,6	7,0	30,5/43,5	64,5/77,5	23,5/36,5
2PXM-LSE 125	77902164	1.840	520	13	151	4/6,5	0,12/0,08	2	7,0	30,5/43,5	64,5/77,5	23,5/36,5
2PXM-LSI 125	77901264	1.920	520	13	157	4/6,5	0,08/0,12	2	7,0	30,5/43,5	64,5/77,5	23,5/36,5






LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

2PXM 160

Universal gripper

Pneumatic gripper

Dimension and technical data

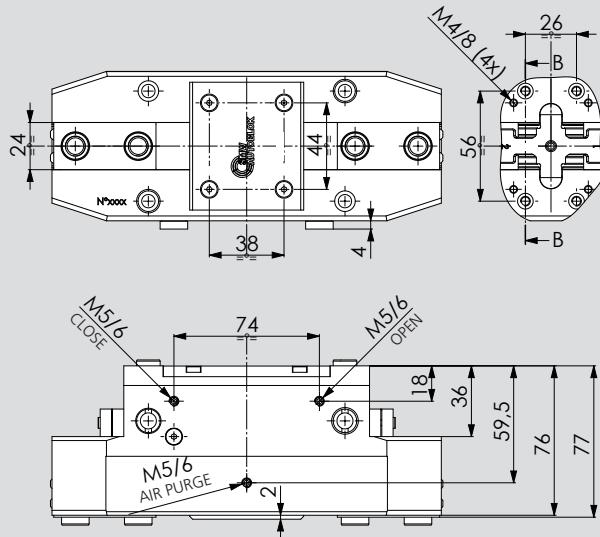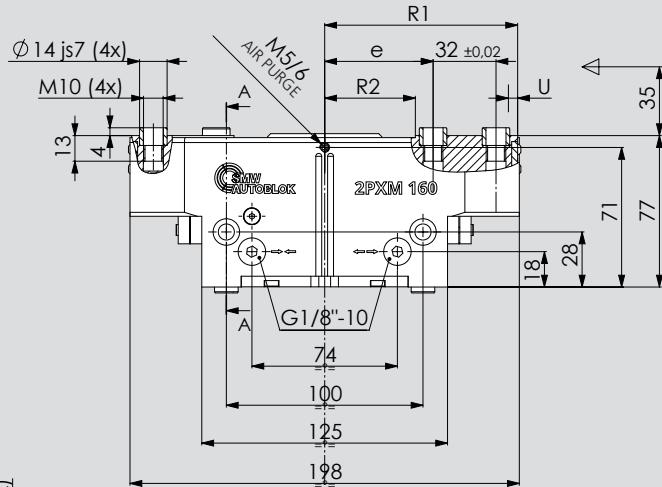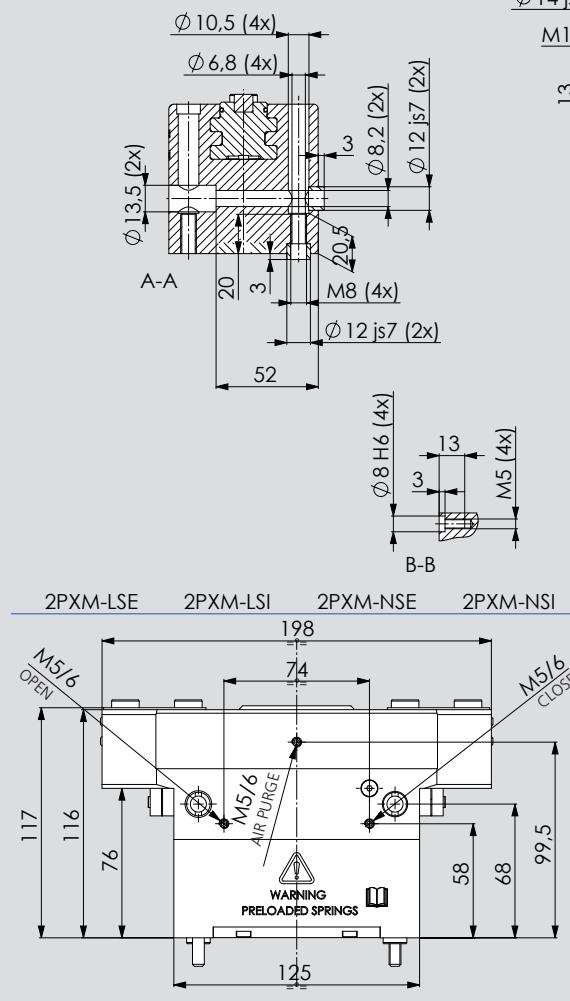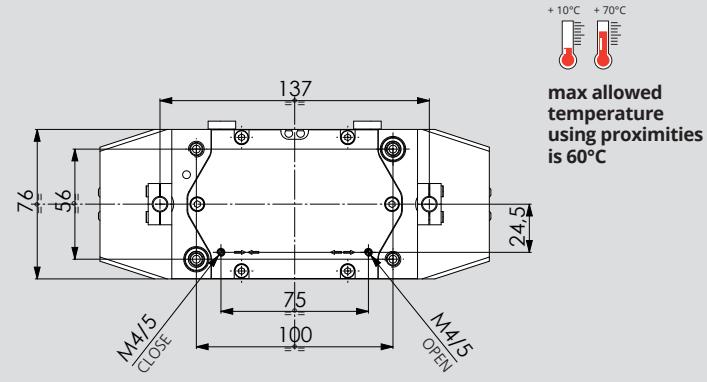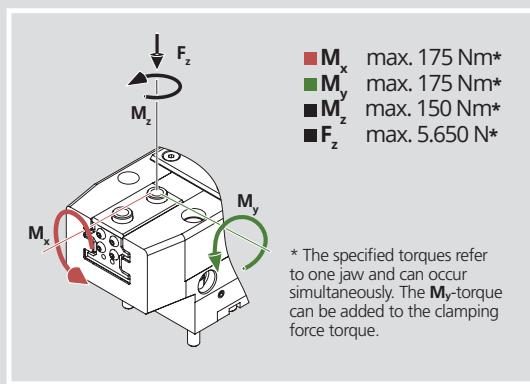

Subject to technical changes.







For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
2PXM-N 160	77901868	4.560	-----	8	161	2/8	0,14/0,14	2,9	23,0	38,5/46,5	90/98	29,5/37,5
2PXM-NSE 160	77902068	6.510	1.950	8	318	4/6,5	0,22/0,11	3,7	23,0	38,5/46,5	90/98	29,5/37,5
2PXM-NSI 160	77901168	6.850	1.950	8	330,5	4/6,5	0,11/0,22	3,7	23,0	38,5/46,5	90/98	29,5/37,5
2PXM-L 160	77901968	2.150	-----	16	161	2/8	0,14/0,14	2,9	11,0	38,5/46,5	82/98	29,5/45,5
2PXM-LSE 160	77902168	3.070	920	16	318	4/6,5	0,22/0,11	3,7	11,0	38,5/46,5	82/98	29,5/45,5
2PXM-LSI 160	77901268	3.240	920	16	330,5	4/6,5	0,11/0,22	3,7	11,0	38,5/46,5	82/98	29,5/45,5

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

Dimension and technical data

Pneumatic gripper

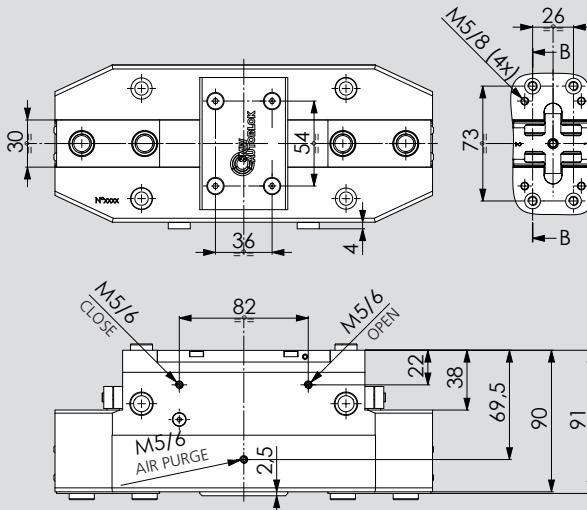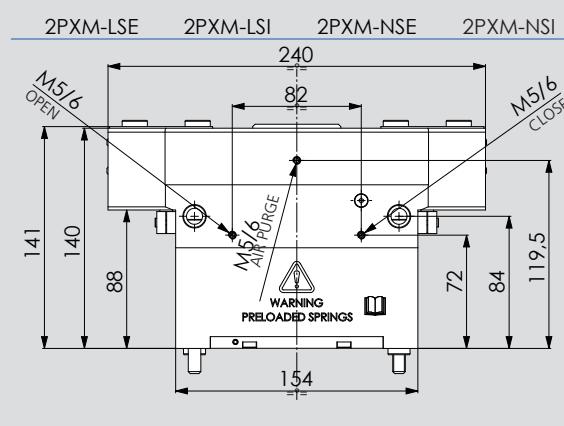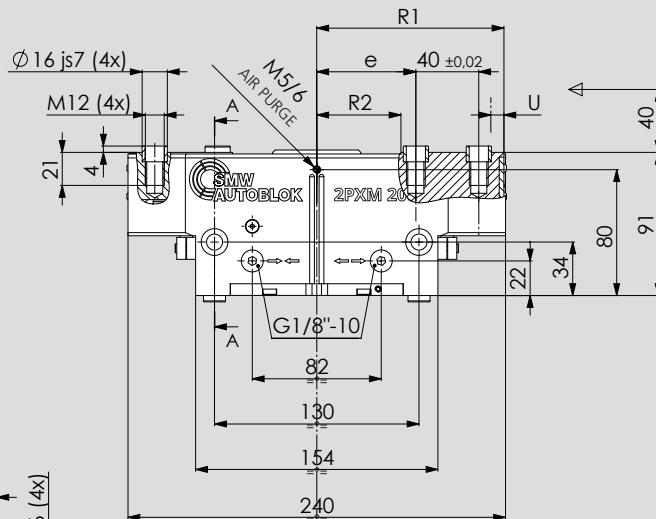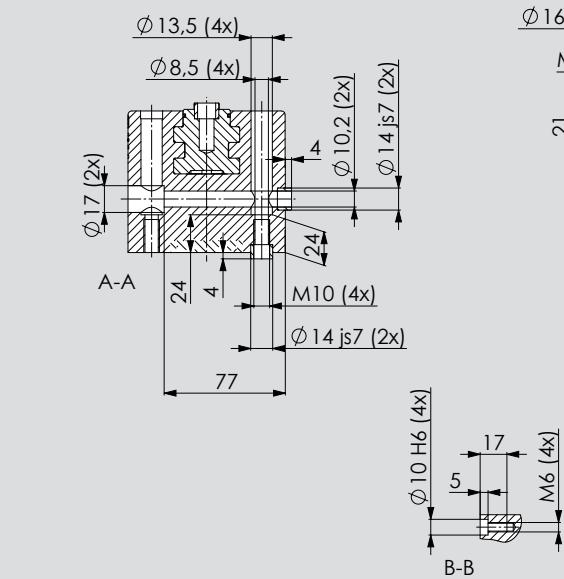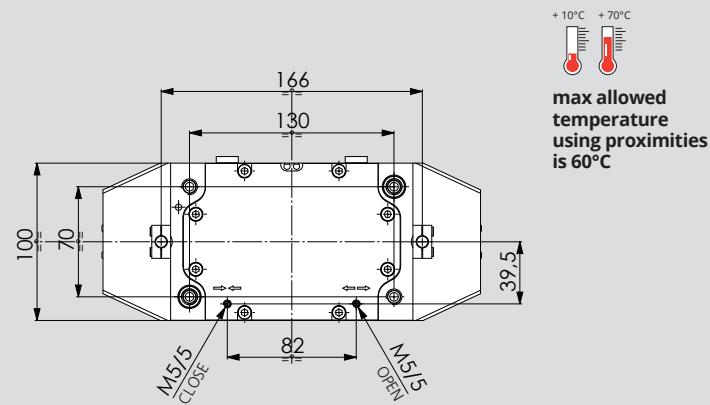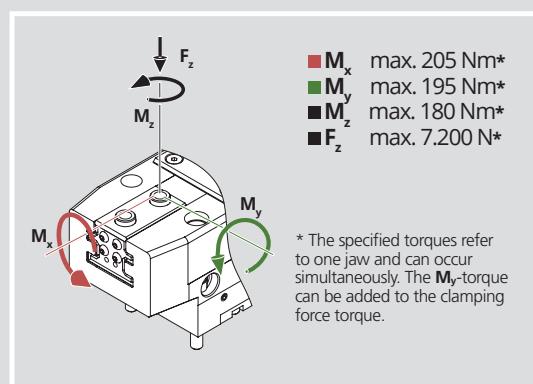

Subject to technical changes.

For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
2PXM-N 200	77901872	5.560	-----	14	373	2/8	0,3/0,3	5,8	28,0	38/52	105/119	28,5/42,5
2PXM-NSE 200	77902072	7.560	2.000	14	733	4/6,5	0,5/0,3	7,3	28,0	38/52	105/119	28,5/42,5
2PXM-NSI 200	77901172	7.900	2.000	14	758	4/6,5	0,3/0,5	7,3	28,0	38/52	105/119	28,5/42,5
2PXM-L 200	77901972	3.700	-----	25	373	2/8	0,3/0,3	5,8	18,5	38/63	94/119	28,5/53,5
2PXM-LSE 200	77902172	5.020	1.320	25	733	4/6,5	0,5/0,3	7,3	18,5	38/63	94/119	28,5/53,5
2PXM-LSI 200	77901272	5.260	1.320	25	758	4/6,5	0,3/0,5	7,3	18,5	38/63	94/119	28,5/53,5

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

Universal gripper

■ 2 finger parallel

Application/customer benefits

- Compact, lightweight design and high gripping force thanks to optimized oval piston geometry
- Gripping force retention (LSI/LSE, NSE/NSI)
- ID and OD clamping
- Side or rear feeding
- Compatible with commercially available grippers


Technical features

- Aluminum housing
- Protection class: IP64
- Functional parts heat-treated for high precision and long life
- Highest rigidity and repeatability: 0,04 mm
- Prepared for Air purge
- Optional: Sensor package for gripping position / end position monitoring (IPS 4.0)

Standard equipment





Gripper with centering sleeves and mounting bolts (without gripper fingers and sensors)

2PXL

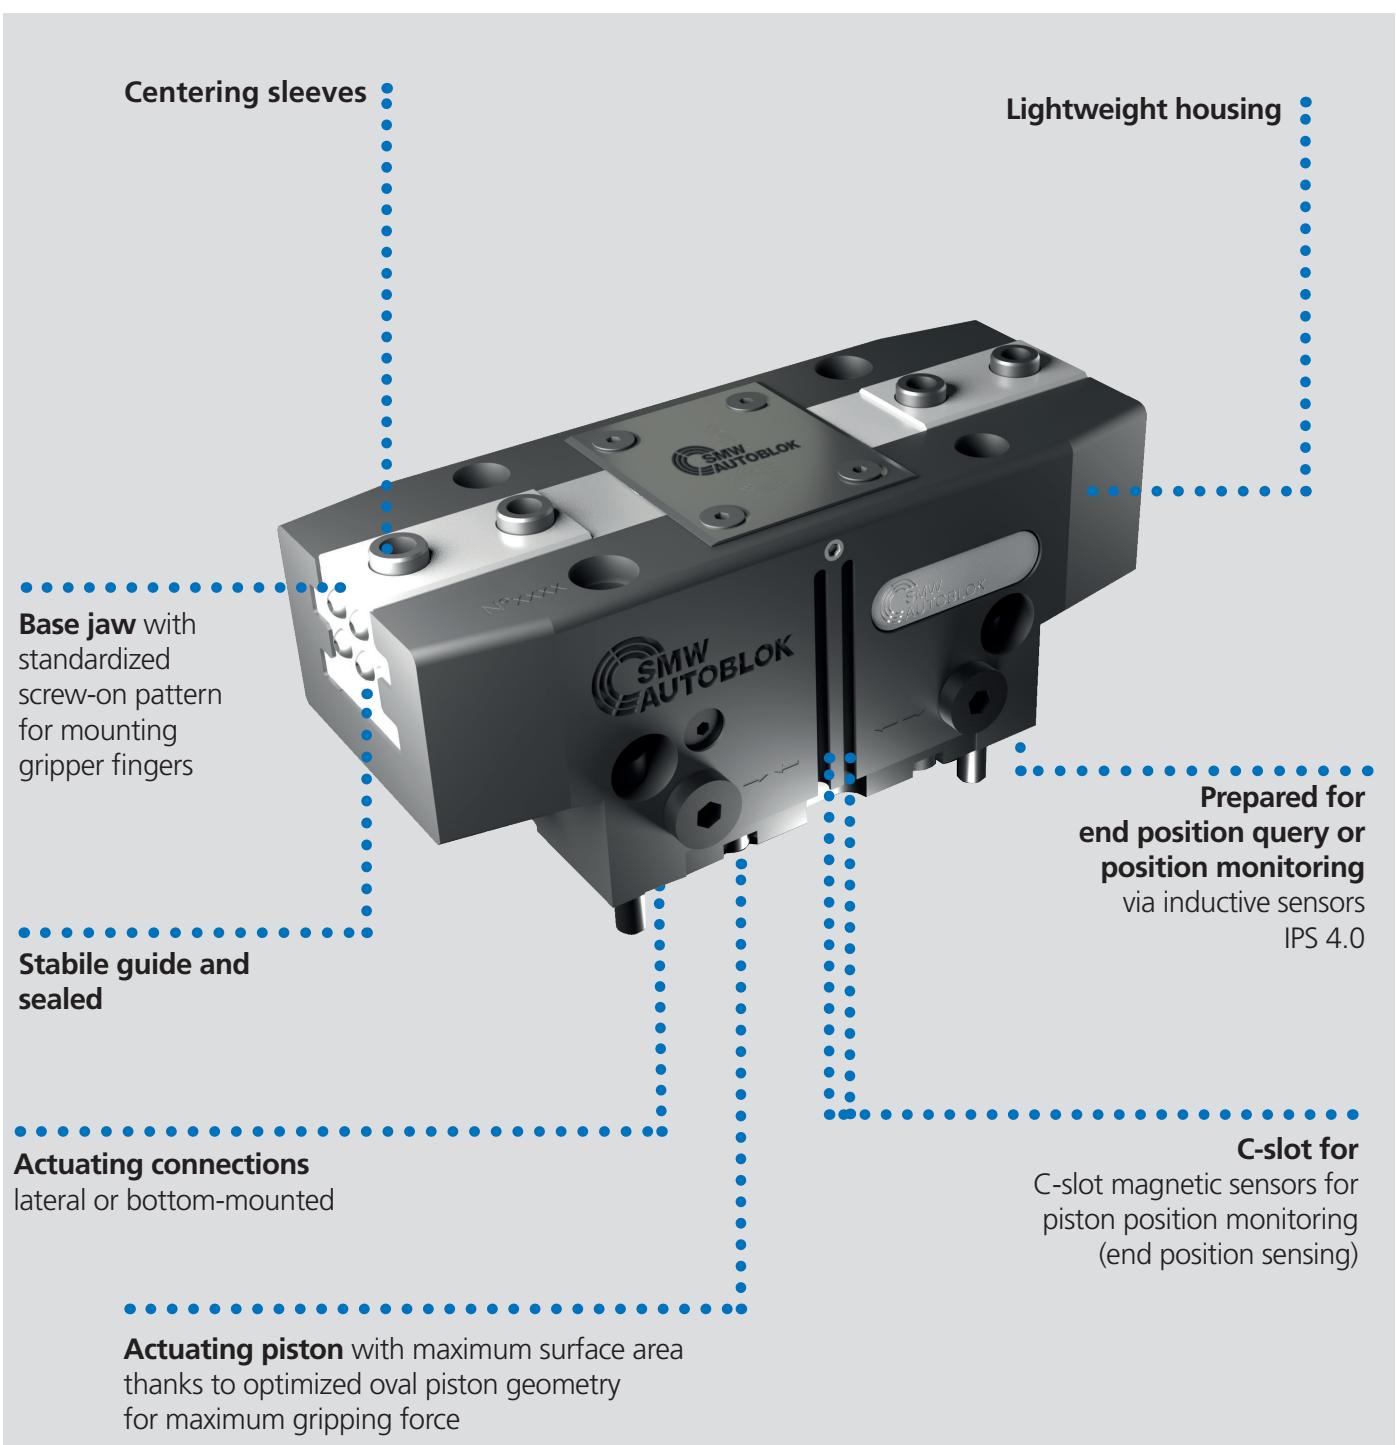

Dimension and technical data

Pneumatic gripper

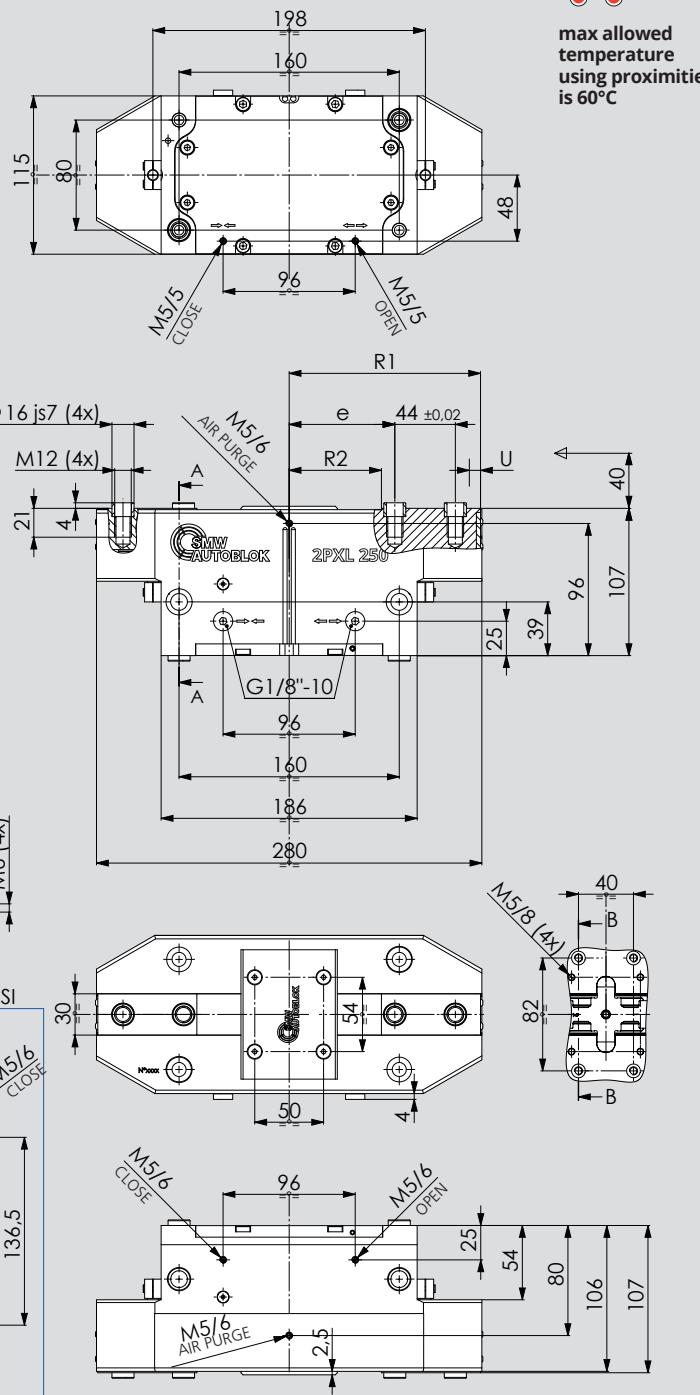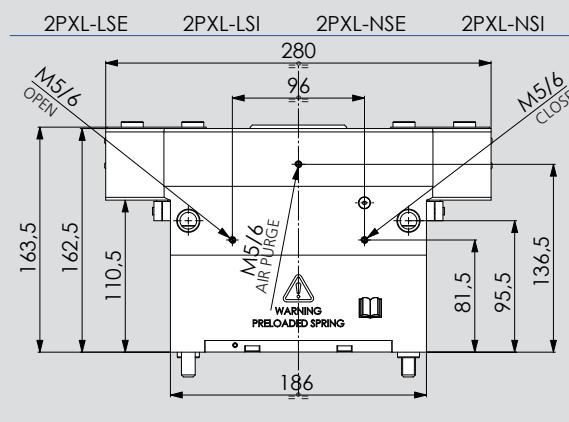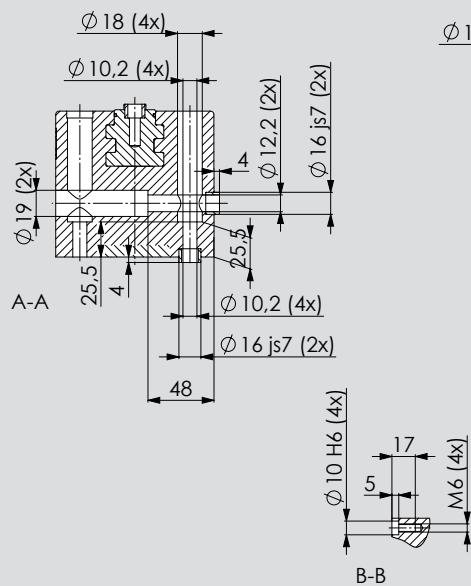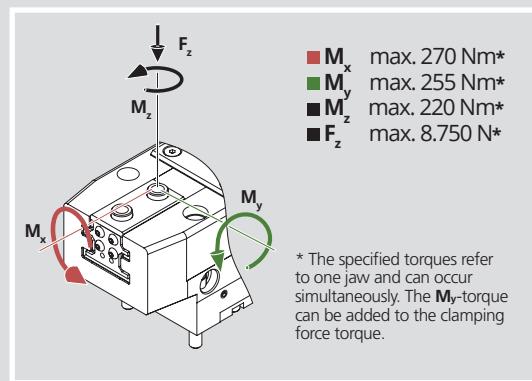

Subject to technical changes.

For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
2PXL-N 250	77901877	8.000	-----	17	651	2/8	0,5/0,5	8,4	40,0	46,75/63,75	122/139	37/54
2PXL-NSE 250	77902077	11.000	3.000	17	1251	4/6,5	0,7/0,4	10,7	40,0	46,75/63,75	122/139	37/54
2PXL-NSI 250	77901177	11.350	3.000	17	1278	4/6,5	0,4/0,7	10,7	40,0	46,75/63,75	122/139	37/54
2PXL-L 250	77901977	5.300	-----	30	651	2/8	0,5/0,5	8,2	26,5	46,75/76,75	109/139	37/67
2PXL-LSE 250	77902177	7.300	2.000	30	1251	4/6,5	0,7/0,4	10,5	26,5	46,75/76,75	109/139	37/67
2PXL-LSI 250	77901277	7.550	2.000	30	1278	4/6,5	0,4/0,7	10,5	26,5	46,75/76,75	109/139	37/67

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

Sensor Package

Pneumatic gripper


2PXS/2PXM/2PXL

- Gripping position monitoring via inductive sensors
- End position monitoring via inductive sensors

End position monitoring

QUERY CLOSED

QUERY OPEN

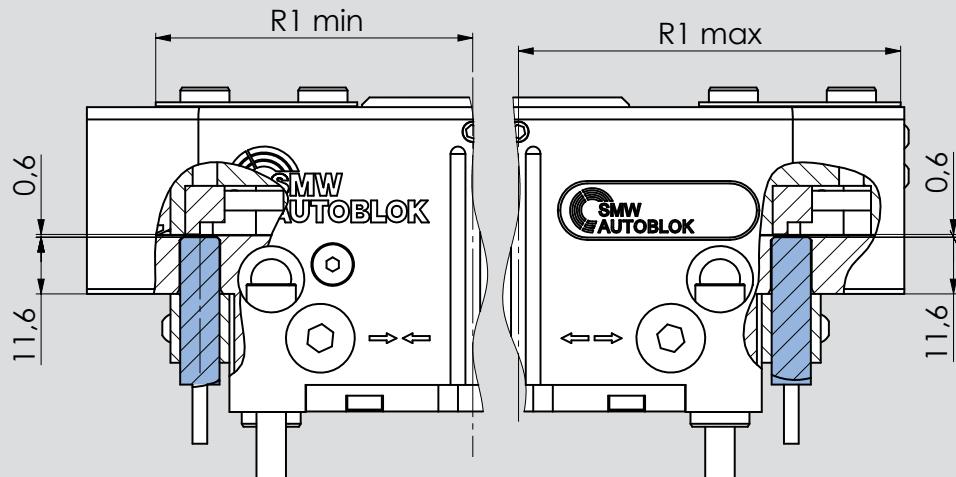

Type

SENSOR Id. No.*


IPS 4.0 M08-PNP

OE012802

*You can find more information on page 84.

Gripping position monitoring

QUERY POSITION

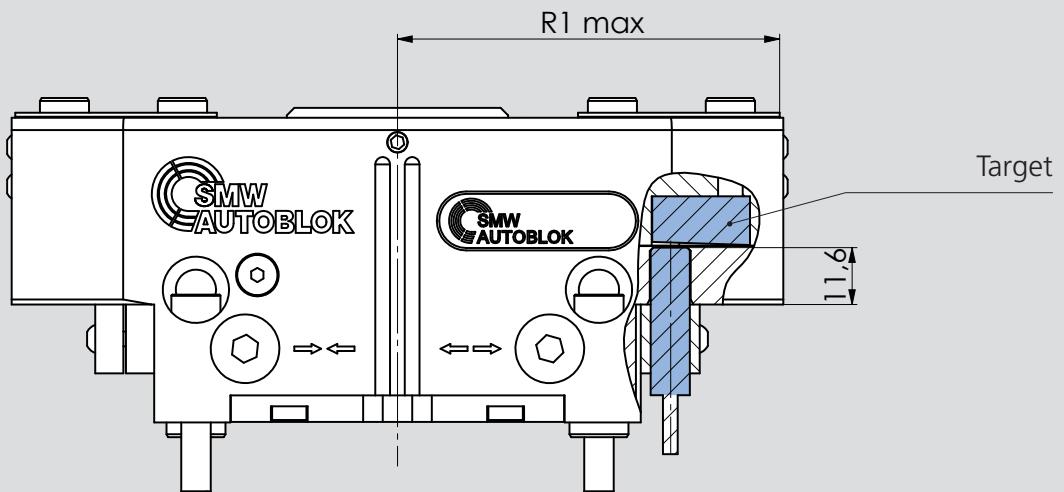

Type

SENSOR Id. No.*

TARGET Id. No.

IPS 4.0 M08x040 0-10V e-sensing

OE012810

92262163

*You can find more information on page 85.

Notes

Pneumatic gripper



Centric gripper

■ 3 finger centric

Application/customer benefits

- Compact and light design and high gripping force
- ID and OD clamping
- Integrated greasing system on base jaw (use SMW-AUTOBLOK K67 grease)

Technical features

- Aluminum housing
- Protection class: IP40
- Functional parts heat-treated for high precision and long life
- Highest rigidity and repeatability: 0,01 mm
- Prepared for Air purge
- Optional: Spring workstop, Pneumatic stroke control valve, Sensor package

Standard equipment

Gripper with centering sleeves and mounting bolts (without gripper fingers and sensors)

3PXS

Centering sleeves



Lightweight housing




Base jaw with standardized
screw-on pattern
for mounting gripper fingers

Prepared for
end position query or
position monitoring
via inductive sensors IPS 4.0

Stable guide



Dimension and technical data

Pneumatic gripper

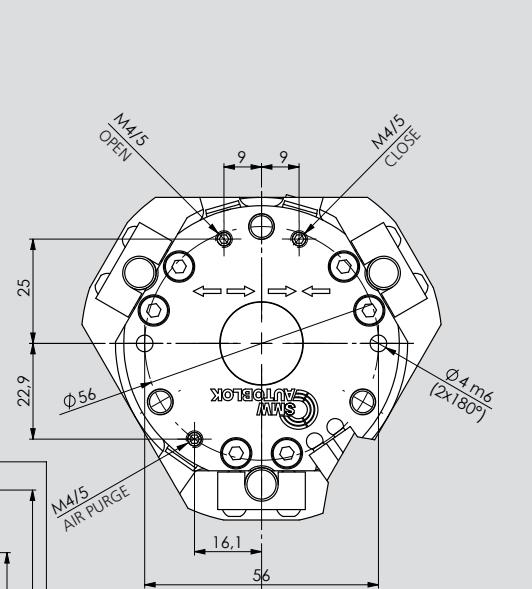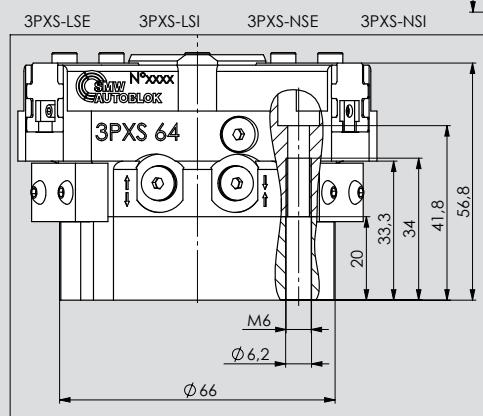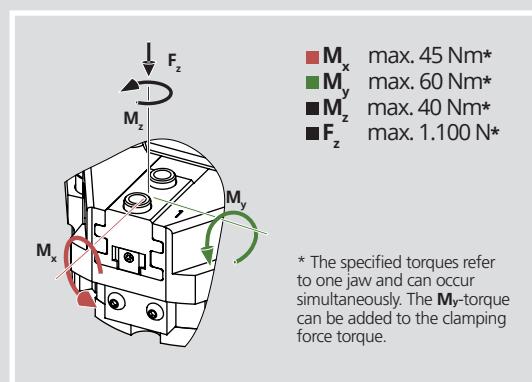

+ 10°C + 70°C

 max allowed temperature using proximities is 60°C

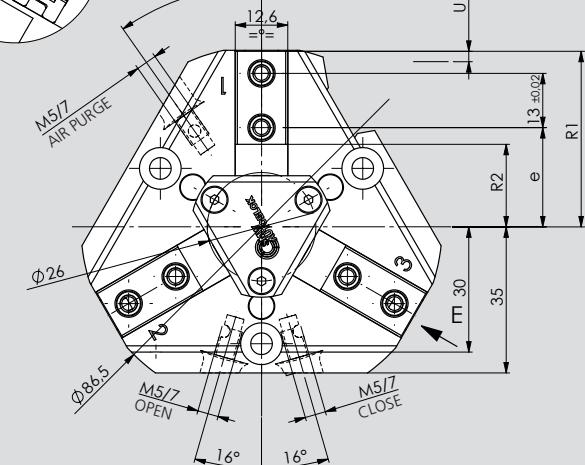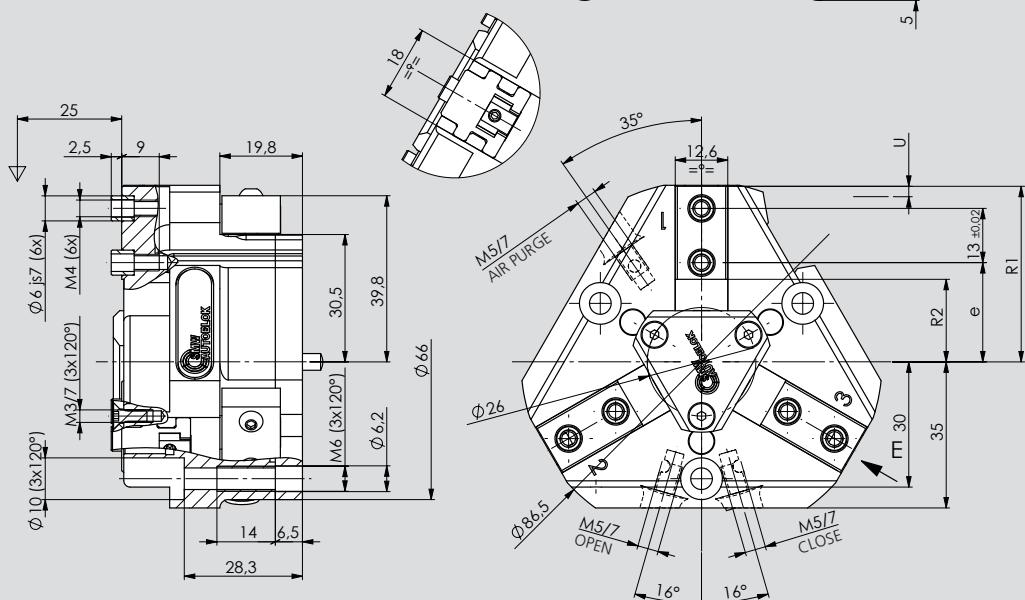


Subject to technical changes.

For more detailed information please ask our customer service.






Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stoke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
3PXS-N 64	77920407	1.300	----	3	19,5	2/8	0,03/0,03	0,5	6,5	17,5/20,5	39/42	13,5/16,5
3PXS-NSE 64	77920507	1.600	300	3	36	4/6,5	0,05/0,03	0,6	6,5	17,5/20,5	39/42	13,5/16,5
3PXS-NSI 64	77920607	1.790	300	3	38,5	4/6,5	0,03/0,05	0,6	6,5	17,5/20,5	39/42	13,5/16,5
3PXS-L 64	77920107	630	----	6	19,5	2/8	0,03/0,03	0,5	3,0	17,5/23,5	36/42	13,5/19,5
3PXS-LSE 64	77920207	780	150	6	36	4/6,5	0,05/0,03	0,6	3,0	17,5/23,5	36/42	13,5/19,5
3PXS-LSI 64	77920307	850	150	6	38,5	4/6,5	0,03/0,05	0,6	3,0	17,5/23,5	36/42	13,5/19,5

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

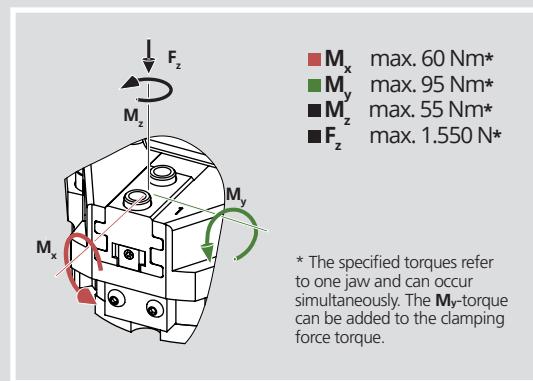

+ 10°C + 70°C

max allowed temperature using proximities is 60°C

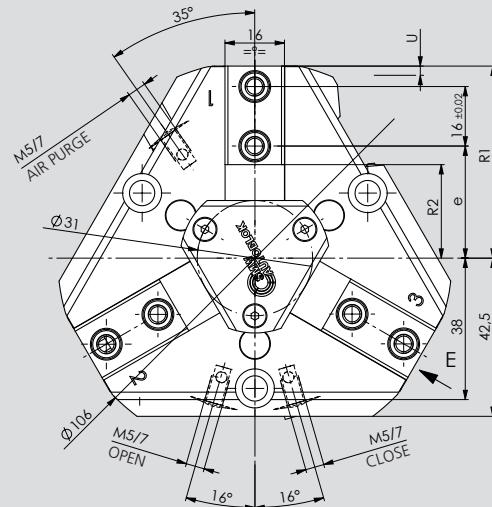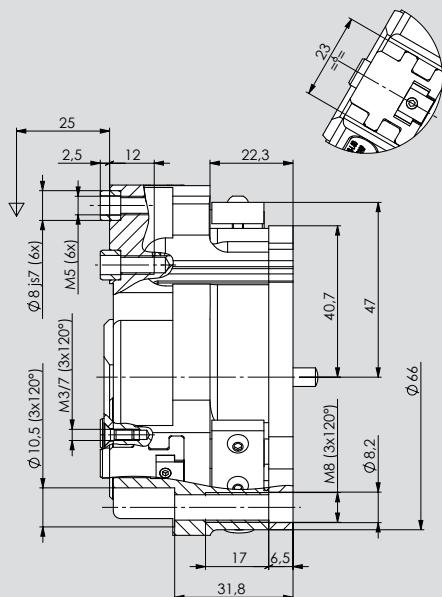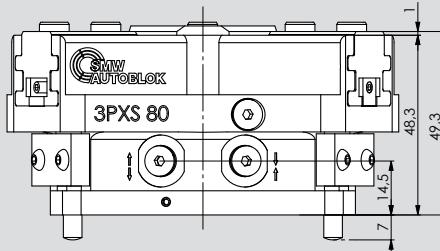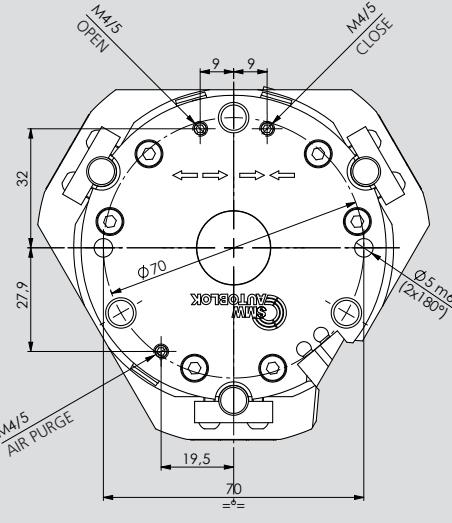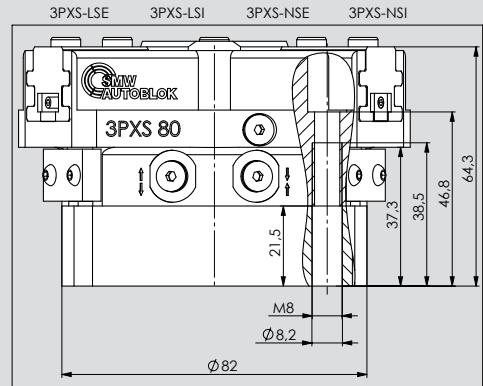

Subject to technical changes.


For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
3PXS-N 80	77920409	2.350	----	4	45,5	2/8	0,05/0,05	0,8	11,5	22/26	47,5/51,5	17/21
3PXS-NSE 80	77920509	3.050	700	4	78,5	4/6,5	0,06/0,04	1	11,5	22/26	47,5/51,5	17/21
3PXS-NSI 80	77920609	3.270	700	4	81,5	4/6,5	0,04/0,06	1	11,5	22/26	47,5/51,5	17/21
3PXS-L 80	77920109	1.100	----	8	45,5	2/8	0,05/0,05	0,8	5,5	22/30	43,5/51,5	17/25
3PXS-LSE 80	77920209	1.400	300	8	78,5	4/6,5	0,06/0,04	1	5,5	22/30	43,5/51,5	17/25
3PXS-LSI 80	77920309	1.500	300	8	81,5	4/6,5	0,04/0,06	1	5,5	22/30	43,5/51,5	17/25






LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

Dimension and technical data

Pneumatic gripper

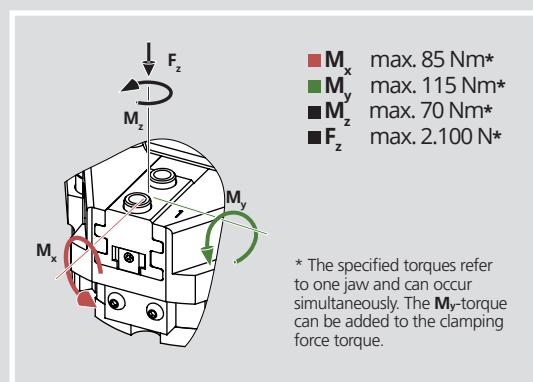

+ 10°C + 70°C
 max allowed temperature using proximities is 60°C

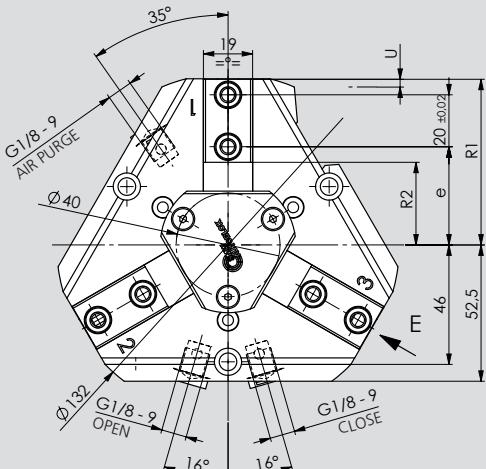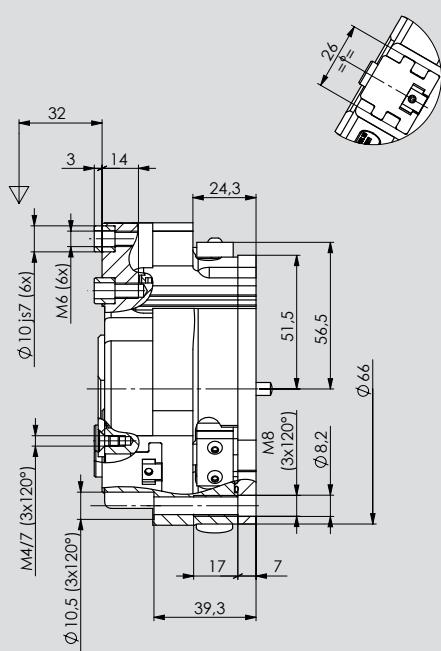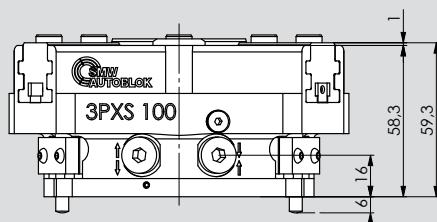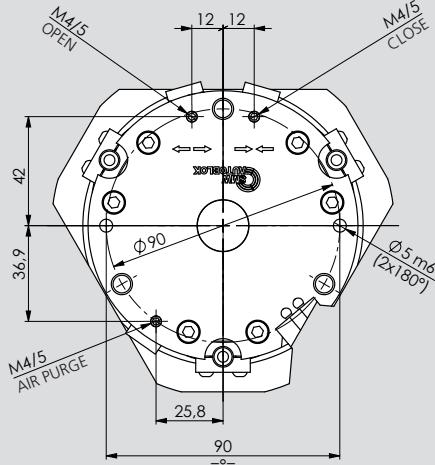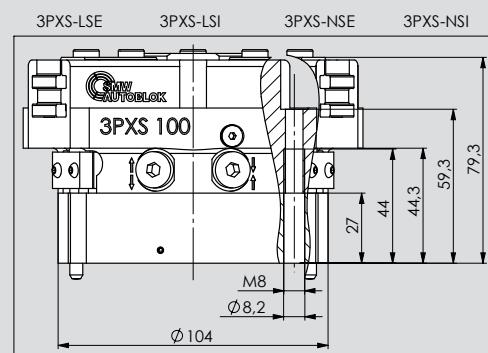

Subject to technical changes.
For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
3PXS-N 100	77920411	4.100	----	5	94,5	2/8	0,12/0,12	1,7	20,0	27,5/32,5	59/64	21,5/26,5
3PXS-NSE 100	77920511	5.450	1.350	5	171	4/6,5	0,22/0,12	2	20,0	27,5/32,5	59/64	21,5/26,5
3PXS-NSI 100	77920611	5.730	1.350	5	176	4/6,5	0,12/0,22	2	20,0	27,5/32,5	59/64	21,5/26,5
3PXS-L 100	77920111	1.950	----	10	94,5	2/8	0,12/0,12	1,7	9,5	27,5/37,5	54/64	21,5/31,5
3PXS-LSE 100	77920211	2.600	650	10	171	4/6,5	0,22/0,12	2	9,5	27,5/37,5	54/64	21,5/31,5
3PXS-LSI 100	77920311	2.730	650	10	176	4/6,5	0,12/0,22	2	9,5	27,5/37,5	54/64	21,5/31,5

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

Centric gripper

■ 3 finger centric

Application/customer benefits

- Compact and light design and high gripping force
- ID and OD clamping
- Integrated greasing system on base jaw (use SMW-AUTOBLOK K67 grease)

Technical features


- Aluminum housing
- Sealed / Protection class: IP64
- Functional parts heat-treated for high precision and long life
- Highest rigidity and repeatability: 0,02 mm
- Prepared for Air purge
- Optional: Spring workstop, pneumatic stroke control valve, Sensor package

Standard equipment

Gripper with centering sleeves and mounting bolts (without gripper fingers and sensors)




3PXM

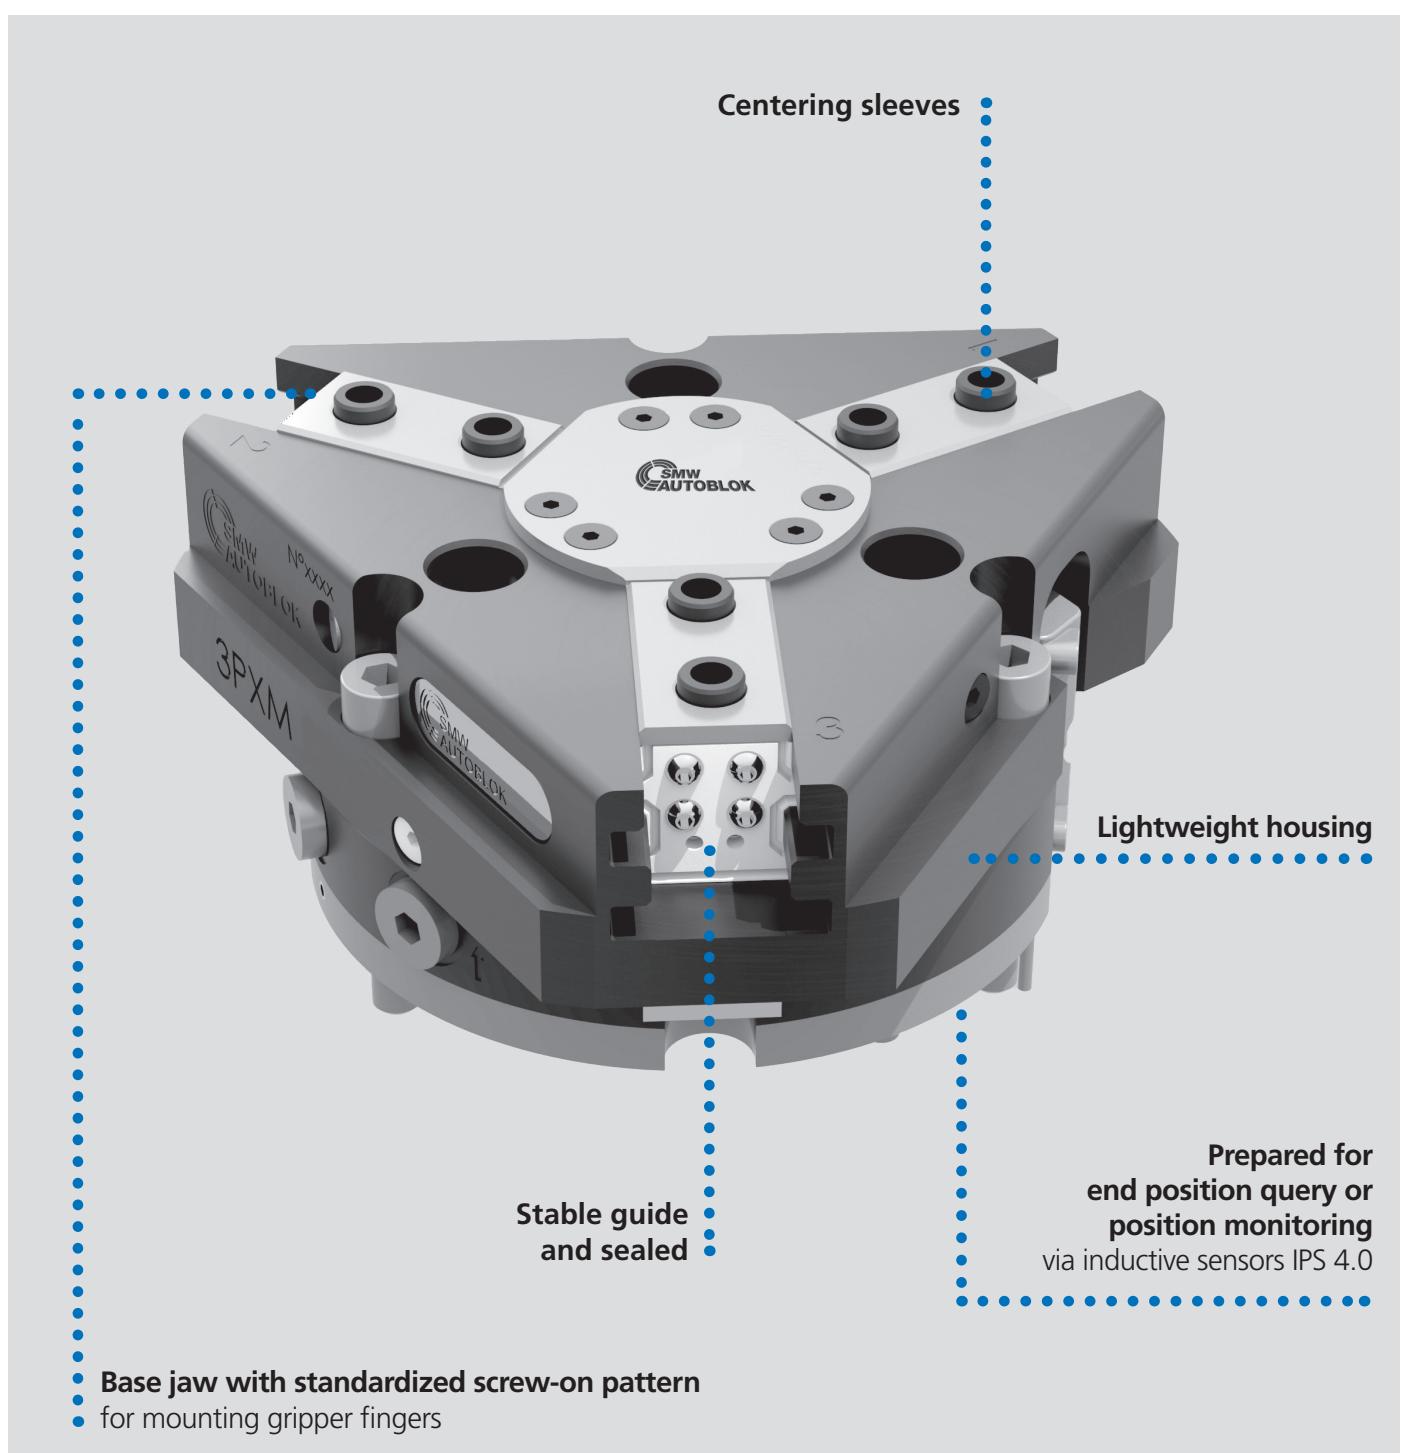





Dimension and technical data

Pneumatic gripper

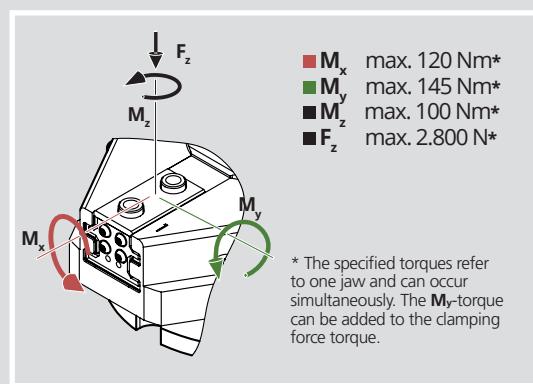

+ 10°C + 70°C

max allowed temperature using proximities is 60°C

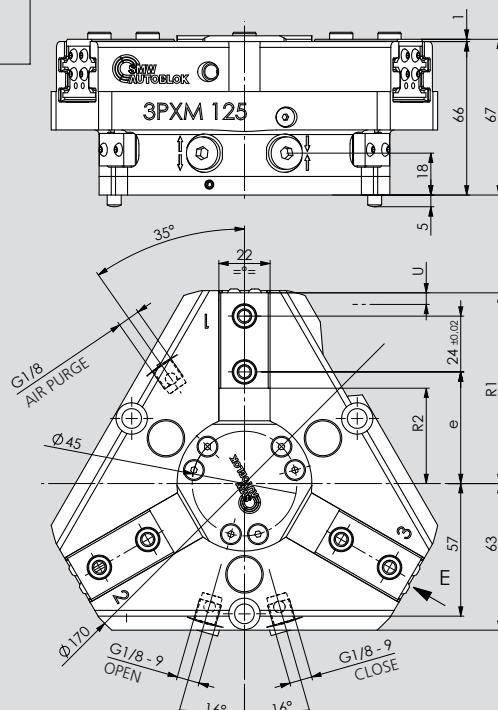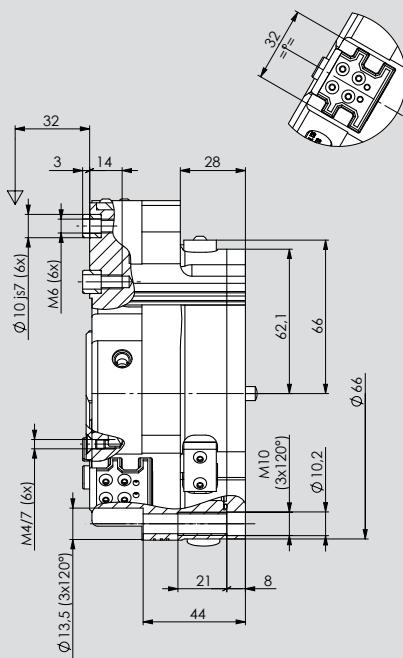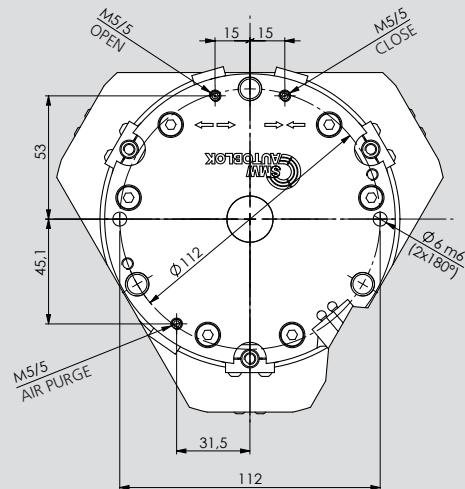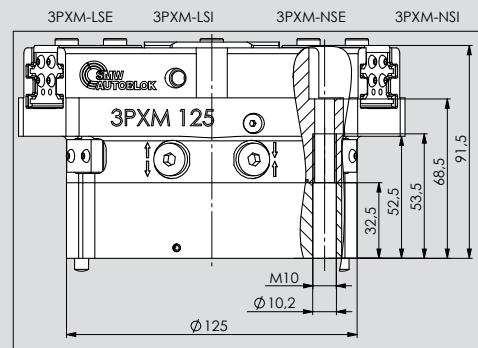

Subject to technical changes.

For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
3PXM-N 125	77920413	6.750	----	6	200,5	2/8	0,2/0,2	2,7	33,5	35/41	76/82	28/34
3PXM-NSE 125	77920513	9.450	2.700	6	357	4/6,5	0,32/0,17	3,3	33,5	35/41	76/82	28/34
3PXM-NSI 125	77920613	9.900	2.700	6	366,5	4/6,5	0,17/0,32	3,3	33,5	35/41	76/82	28/34
3PXM-L 125	77920113	3.200	----	13	200,5	2/8	0,2/0,2	2,7	16,0	35/48	69/82	28/41
3PXM-LSE 125	77920213	4.500	1.300	13	357	4/6,5	0,32/0,17	3,3	16,0	35/48	69/82	28/41
3PXM-LSI 125	77920313	4.700	1.300	13	366,5	4/6,5	0,17/0,32	3,3	16,0	35/48	69/82	28/41


LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

3PXM 160






Pneumatic gripper

Centric gripper

Dimension and technical data

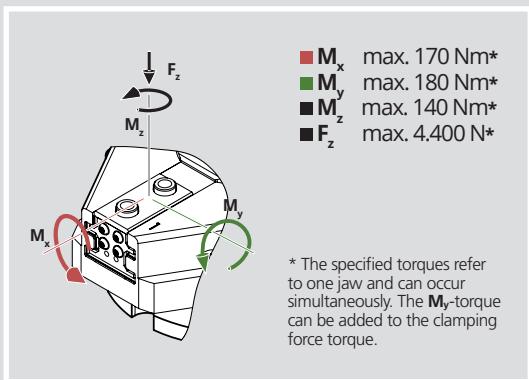

+100°C +70°C
max allowed temperature using proximities is 60°C

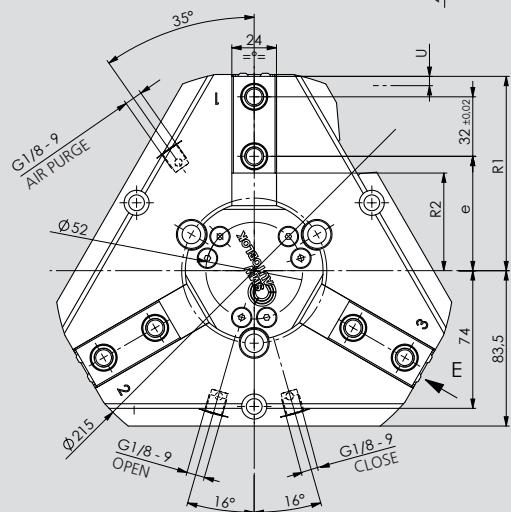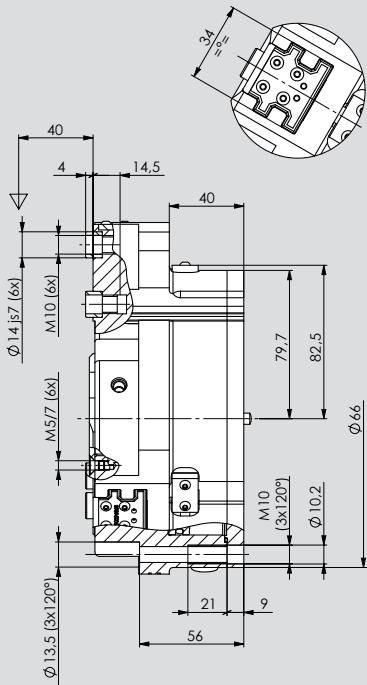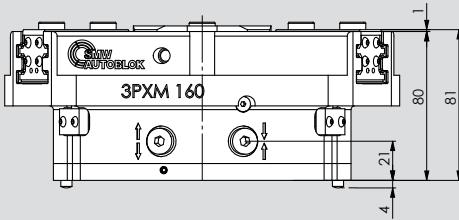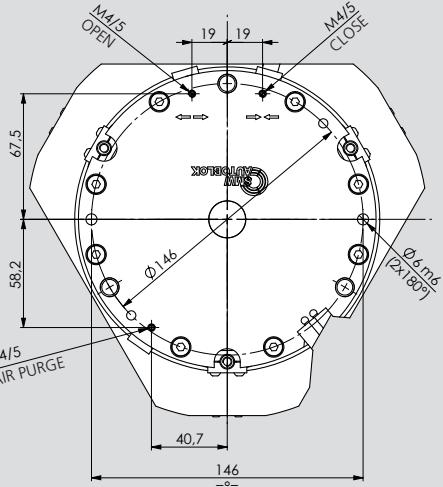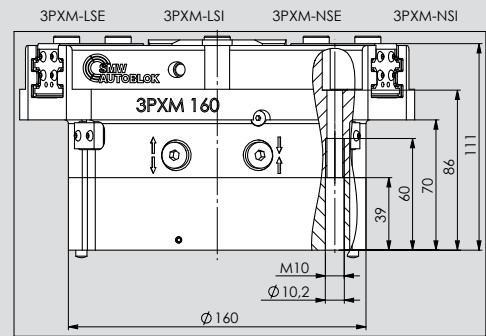

Subject to technical changes.


For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
3PXM-N 160	77920417	12.700	----	8	480	2/8	0,44/0,44	5,2	63,5	45/53	96,5/104,5	36/44
3PXM-NSE 160	77920517	17.500	4800	8	833	4/6,5	0,66/0,36	6,5	63,5	45/53	96,5/104,5	36/44
3PXM-NSI 160	77920617	18.000	4800	8	847,5	4/6,5	0,36/0,66	6,5	63,5	45/53	96,5/104,5	36/44
3PXM-L 160	77920117	6.000	----	16	480	2/8	0,44/0,44	5,2	30,0	45/61	88,5/104,5	36/52
3PXM-LSE 160	77920217	8.300	2300	16	833	4/6,5	0,66/0,36	6,5	30,0	45/61	88,5/104,5	36/52
3PXM-LSI 160	77920317	8.550	2300	16	847,5	4/6,5	0,36/0,66	6,5	30,0	45/61	88,5/104,5	36/52

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke





Dimension and technical data

Pneumatic gripper

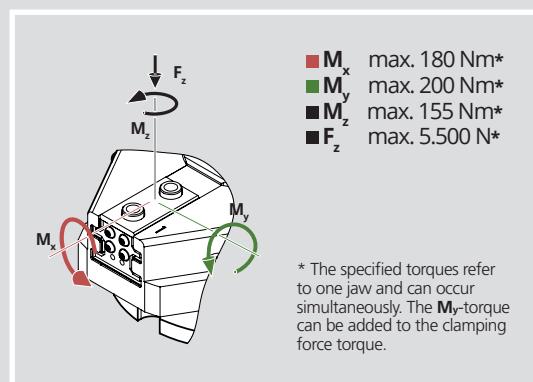

+ 10°C + 70°C

max allowed temperature using proximities is 60°C

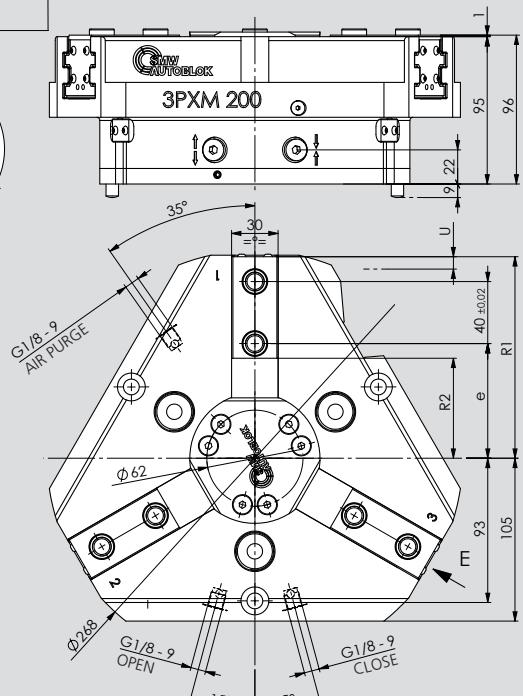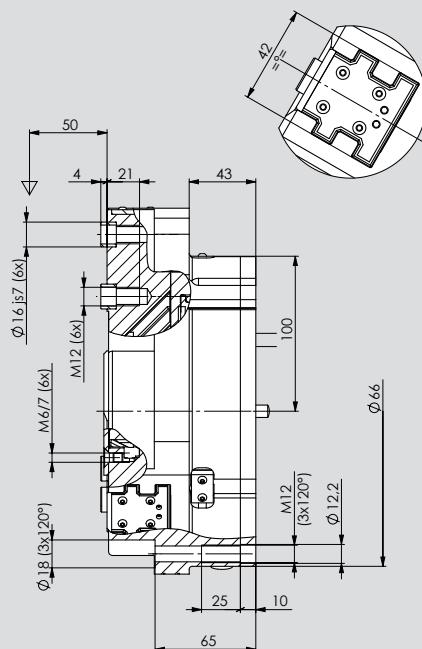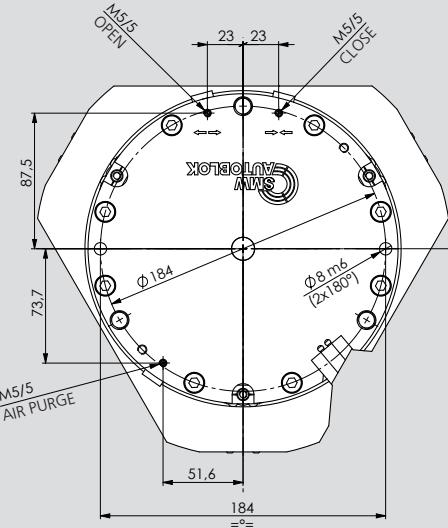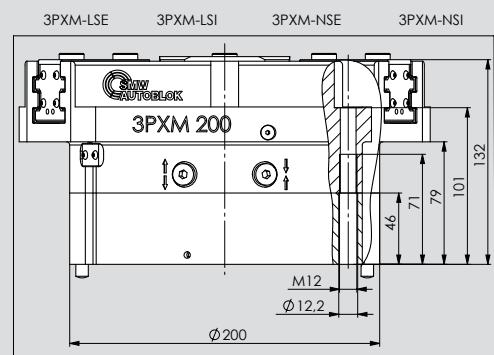

Subject to technical changes.
 For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stoke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
3PXM-N 200	77920421	12.200	----	14	866	2/8	1,05/1,05	10,1	60,0	49/63	116/130	39,5/53,5
3PXM-NSE 200	77920521	16.300	4100	14	1476,5	4/6,5	1,38/0,9	12,2	60,0	49/63	116/130	39,5/53,5
3PXM-NSI 200	77920621	16.800	4100	14	1502	4/6,5	0,9/1,38	12,2	60,0	49/63	116/130	39,5/53,5
3PXM-L 200	77920121	8.100	----	25	866	2/8	1,05/1,05	10,1	40,5	49/74	105/130	39,5/64,5
3PXM-LSE 200	77920221	10.850	2750	25	1476,5	4/6,5	1,38/0,9	12,2	40,5	49/74	105/130	39,5/64,5
3PXM-LSI 200	77920321	11.200	2750	25	1502	4/6,5	0,9/1,38	12,2	40,5	49/74	105/130	39,5/64,5

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

Centric gripper**■ 3 finger centric****Application/customer benefits**


- Compact and light design and high gripping force
- ID and OD clamping
- Integrated greasing system on base jaw (use SMW-AUTOBLOK K67 grease)

Technical features

- Aluminum housing
- Sealed / Protection class: IP64
- Functional parts heat-treated for high precision and long life
- Highest rigidity and repeatability: 0,04 mm
- Air purge
- Optional: Spring workstop, Sensor package


Standard equipment

Gripper with centering sleeves and mounting bolts (without gripper fingers and sensors)




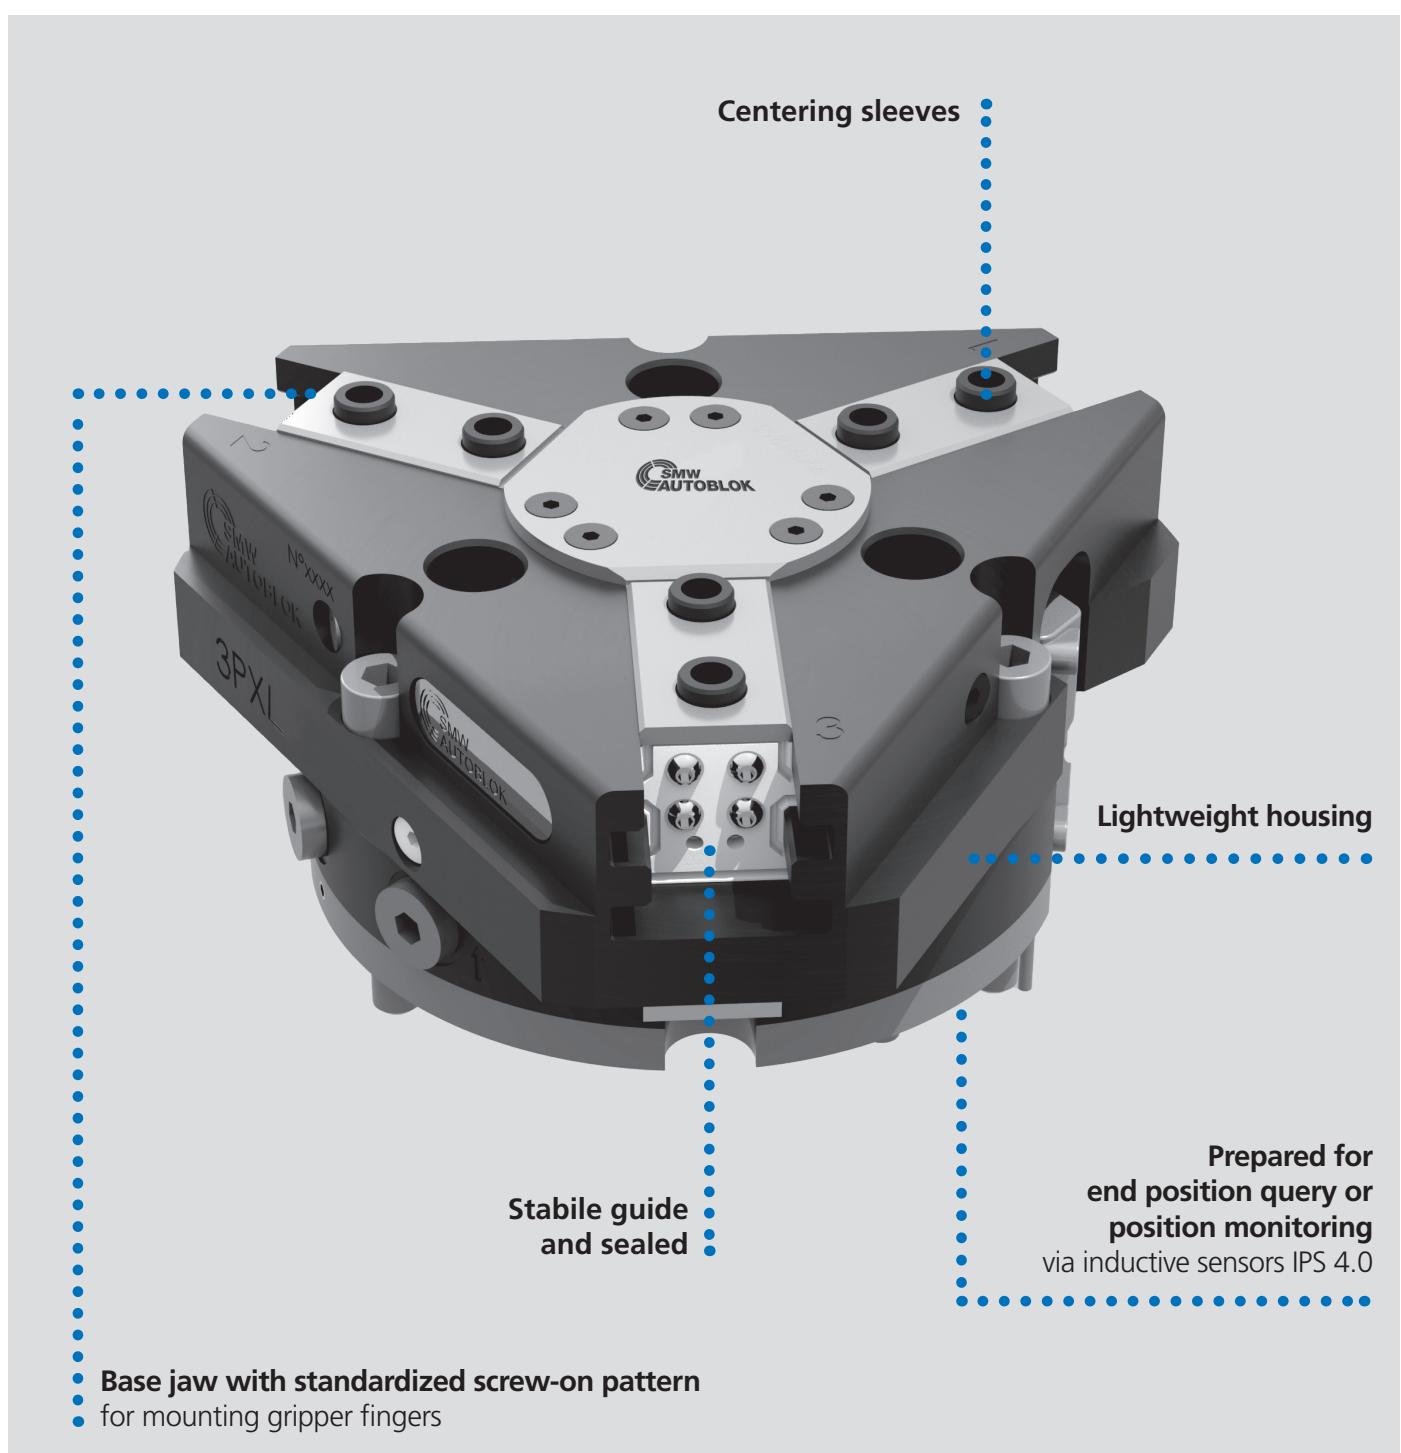
**3PXL**

Dimension and technical data

Pneumatic gripper

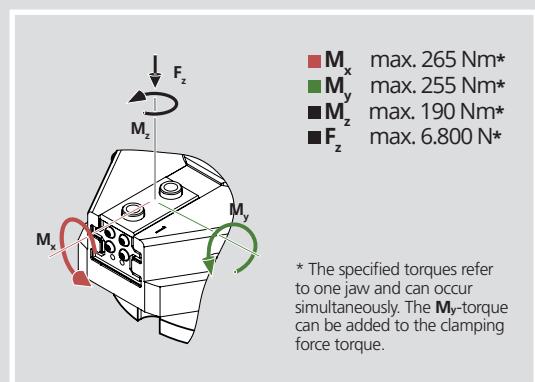

+ 10°C + 70°C
 max allowed temperature using proximities is 60°C

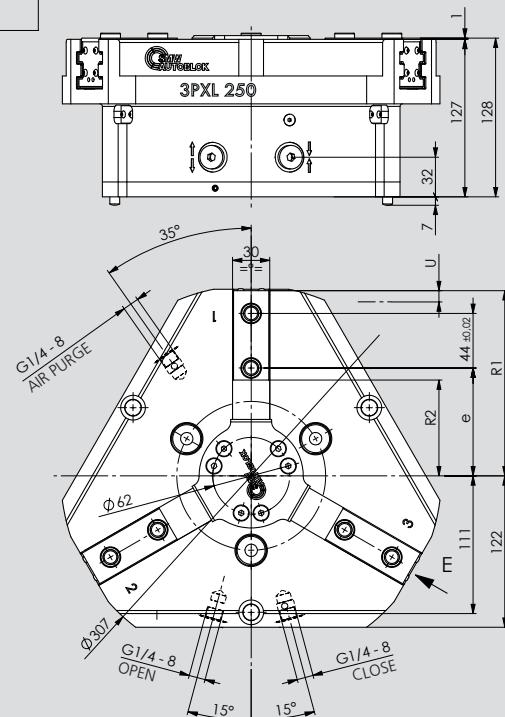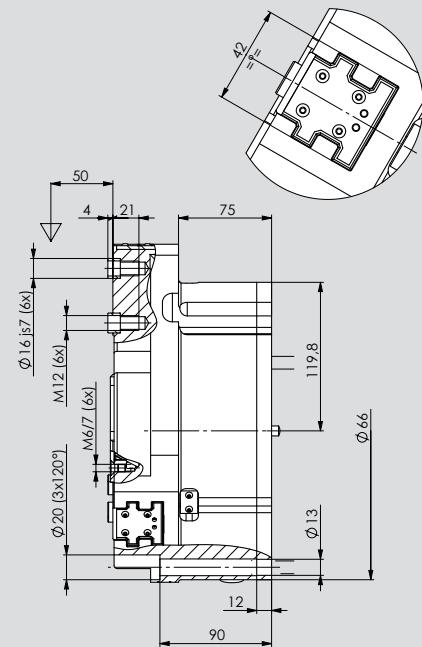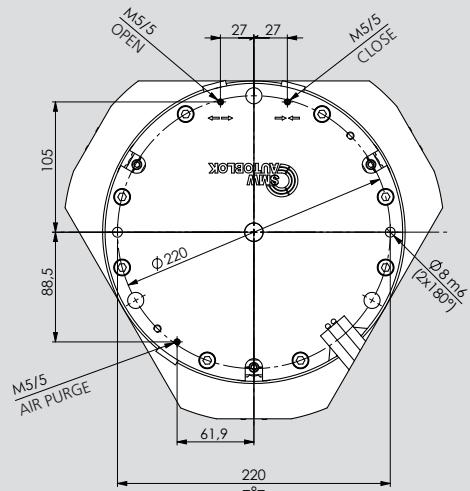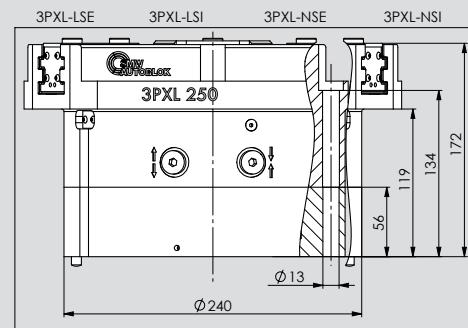

Subject to technical changes.
For more detailed information please ask our customer service.

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Opening / Closing time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)	e (mm) min./max.	R1 (mm) min./max.	R2 (mm) min./max.
3PXL-N 250	77920426	17.550	----	17	1496,5	2/8	1,23/1,23	17	87,5	57/74	132,5/149,5	47/64
3PXL-NSE 250	77920526	24.050	6.500	17	2571,5	4/6,5	2,05/1,08	21	87,5	57/74	132,5/149,5	47/64
3PXL-NSI 250	77920626	24.800	6.500	17	2616,5	4/6,5	1,08/2,05	21	87,5	57/74	132,5/149,5	47/64
3PXL-L 250	77920126	11.700	----	30	1496,5	2/8	1,23/1,23	17	58,5	57/87	119,5/149,5	47/77
3PXL-LSE 250	77920226	16.050	4.350	30	2571,5	4/6,5	2,05/1,08	21	58,5	57/87	119,5/149,5	47/77
3PXL-LSI 250	77920326	16.550	4.350	30	2616,5	4/6,5	1,08/2,05	21	58,5	57/87	119,5/149,5	47/77

LSI/LSE, NSE/NSI = gripping force retention (E = external clamping, I = internal clamping), L = long stroke, N = normal stroke

Sensor Package

Pneumatic gripper


3PXS/3PXM/3PXL

- Gripping position monitoring via inductive sensors
- End position monitoring via inductive sensors

End position monitoring

QUERY CLOSED

QUERY OPEN

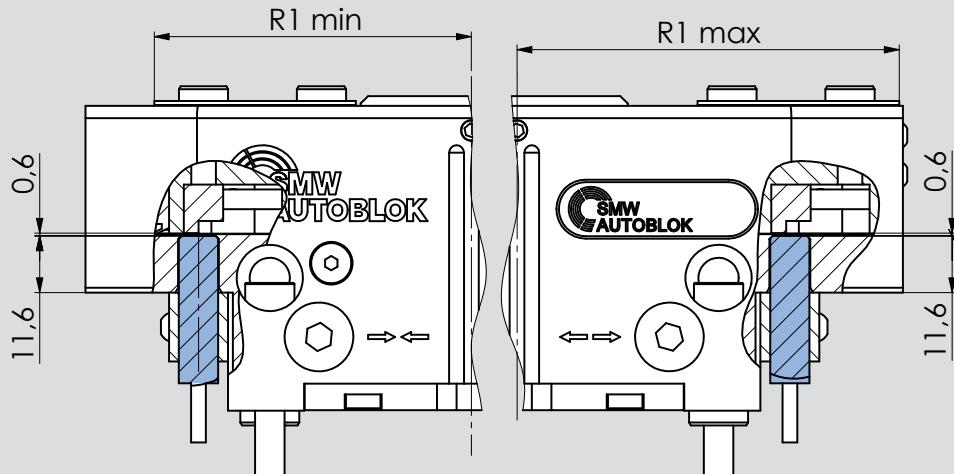

Type

SENSOR Id. No.*


IPS 4.0 M08-PNP

OE012802

*You can find more information on page 84.

Gripping position monitoring

QUERY POSITION

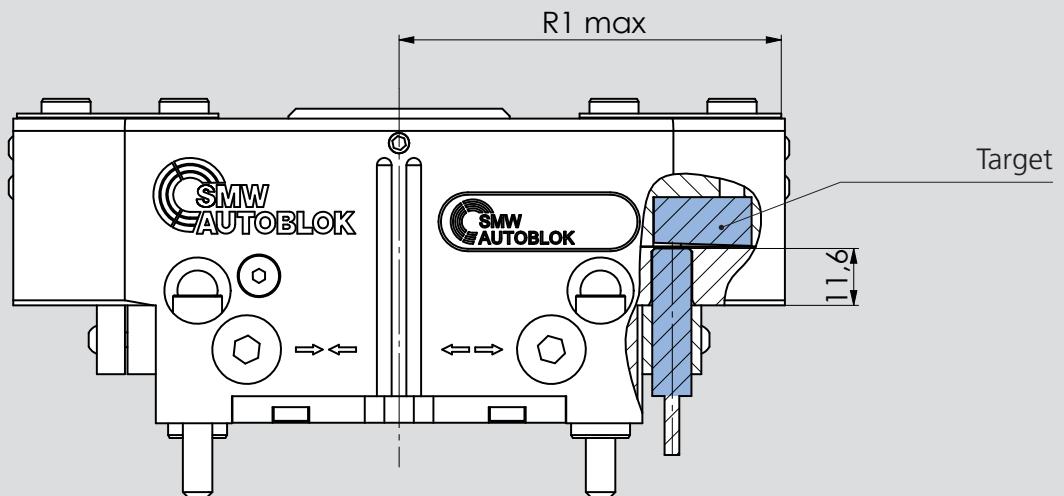

Type

SENSOR Id. No.*

TARGET Id. No.

IPS 4.0 M08x040 0-10V e-sensing

OE012810

92262163

*You can find more information on page 85.


Notes

Gripper finger blanks for pneumatic grippers




CUSTOMIZED GRIPPER fingers for pneumatic and mechatronic grippers:
Our specialists work closely with our customers to develop tailor-made solutions.

- Standard blanks or pneumatic grippers
- Made from aluminum

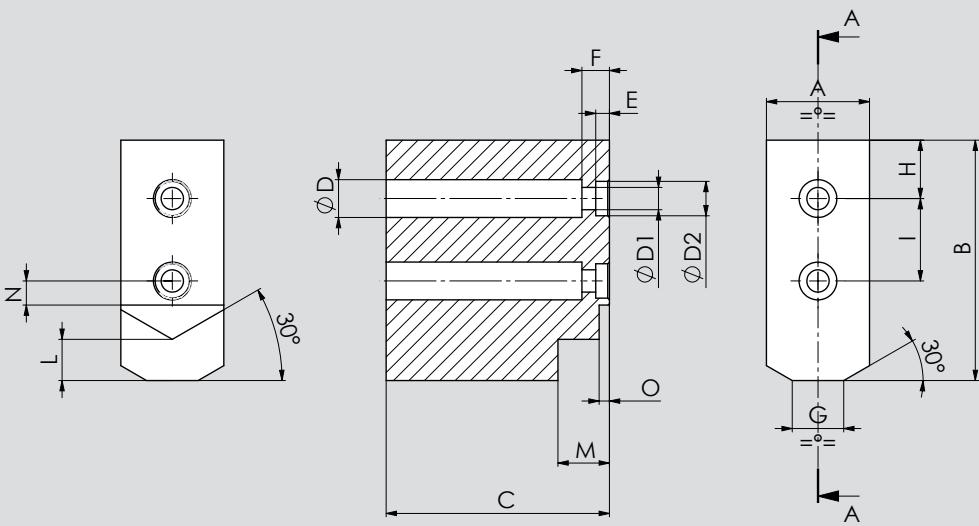

Gripper Size	Id. No.	MAT.	A	B	C	\emptyset_D	\emptyset_{D1}	\emptyset_{D2}	E	F	G	H	I	L	M	N	O	Clamping Range		Weight (Kg)																
																	Normal Stroke	Long Stroke																		
PL 64 2PXS 64	92720663	AL	20	40	35	8	4,5	6	3,5	6	1	11	13	8	11	4	3	0 - 2,5	0 - 8,5	0,057																
	92730663																																			
3PXS 64	92720663				35																															
	92730663																																			
PL 80 2PXS 80	92720863	AL	25	45	45	9	5,5	8	3,5	7	6	10	16	8	11	5	3	0 - 7	0 - 15	0,108																
	92730863																																			
3PXS 80	92720863				45																															
	92730863																																			
PL 100 2PXS 100	92721063	AL	25	55	55	11	6,5	10	4	8	10	12	20	8	11	6	3	1 - 11	1 - 21,5	0,16																
	92731063																																			
3PXS 100	92721063				55																															
	92731063																																			
2PXM 125	92721263	AL	30	70	65	11	6,5	10	4	8	15	17	24	12	15	7	3	3 - 15,5	3 - 29,5	0,31																
	92731263																																			
3PXM 125	92721263				65																															
	92731263																																			
2PXM 160	92721663	AL	30	80	80	17	11	14	5	11	15	11	32	10	14	9	4	3 - 19	3 - 36,5	0,4																
	92731663																																			
3PXM 160	92721663				80																															
	92731663																																			
2PXM 200	92722063	AL	40	100	100	20	13	16	5	13	20	20	40	15	18	9,5	4	0 - 25	0 - 46	0,87																
	92732063																																			
3PXM 200	92722063				100																															
	92732063																																			
2PXL 250	92722563	AL	40	120	120	20	13	16	5	13	20	26	44	15	18	10	4	0 - 28	0 - 53,5	1,3																
	92732563																																			
3PXL 250	92722563				120																															
	92732563																																			

■ 2 finger parallel

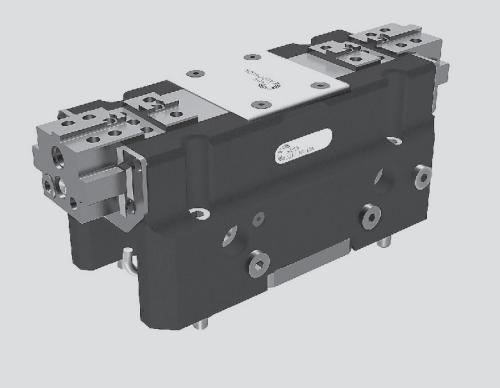**Application/customer benefits**

- Pneumatic (max. 8 bar) as well as hydraulic (max. 30 bar) use
- ID and OD clamping
- Side or rear feeding
- Integrated greasing system on base jaw (use SMW-AUTOBLOK K67 grease)
- Possibility of element presence control (Air sensing)


Technical features

- Rigid steel housing
- Sealed / protection class: IP64
- Body and functional parts heat-treated for high precision and long life
- Base jaws with tongue & groove
- Highest rigidity and repeatability
- Air purge
- Air sensing
- Optional: Sensor package, gripping position/end position monitoring

Standard equipment

Gripper with centering sleeves and mounting bolts (without gripper fingers and sensors)

PP

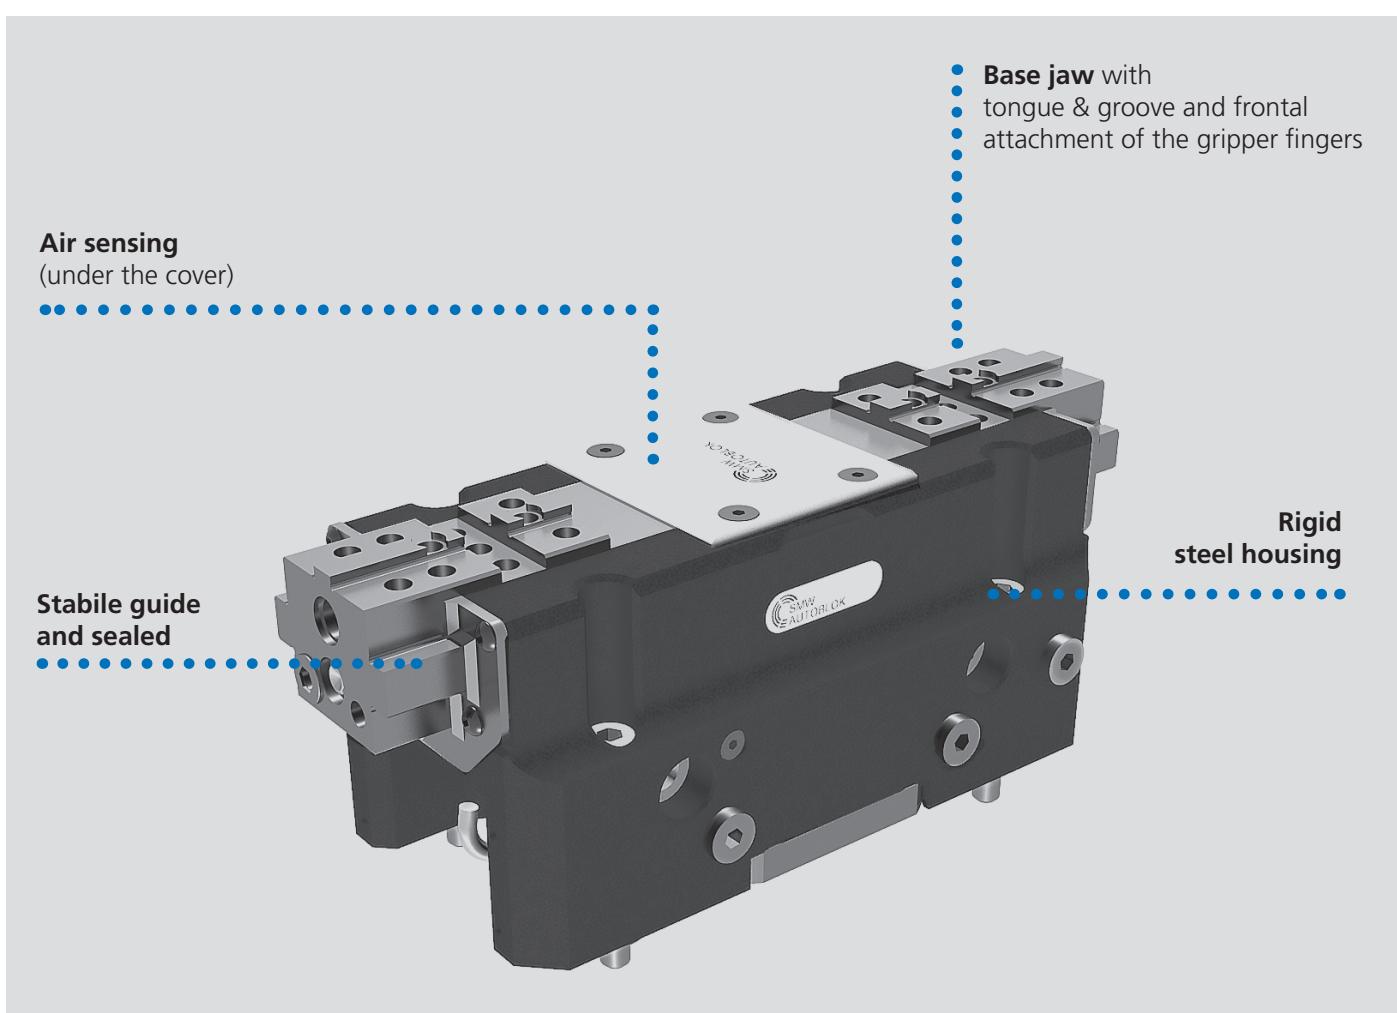

Type	Id. No.	Pneumatic Hydraulic Gripping force (N) at 6 bar at 30 bar	U (mm) jaw stroke	Pneumatic Hydraulic Pressure (bar) min./max.	Weight (Kg)	Pneumatic Hydraulic Recommended Workpiece weight (Kg)	Repeatability (mm)
PP-N 125	77901862	2.900 14.600	5,5	3/8 8/30	4,9	14,5 73	0,01
PP-L 125	77901962	1.300 6.500	13	3/8 8/30	4,9	6,5 32,5	0,01
PP-N 160	77901866	4.000 19.000	5,5	3/8 8/30	5,7	20 95	0,01
PP-L 160	77901966	1.700 8.400	13	3/8 8/30	5,7	8,5 42	0,01
PP-N 200	77901870	5.800 28.500	7	3/8 8/30	11	29 142,5	0,02
PP-L 200	77901970	2.500 12.700	16,5	3/8 8/30	11	12,5 63,5	0,02
PP-N 250	77901875	8.700 43.700	10	3/8 8/30	19,5	43,5 218,5	0,02
PP-L 250	77901975	3.200 15.800	29,8	3/8 8/30	19,5	16 79	0,02

L = long stroke, N = normal stroke

Universal gripper

PL-N/L RR 320/380

- Interface for gripper fingers quick-change system RR
- 2 finger parallel

Pneumatic gripper



Application/customer benefits

- Compact, lightweight design and automatic gripper finger change
- ID and OD clamping
- Tool-free actuation


Technical features

- Aluminum body
- Sealed / Protection class: IP64
- Body and functional parts heat-treated for high precision and long life
- Highest rigidity
- Prepared for Air purge
- Air sensing
- Optional: Sensor package

Standard equipment

Gripper with centering sleeves and mounting bolts (without gripper fingers and sensors)

PL-N / L RR 320/380

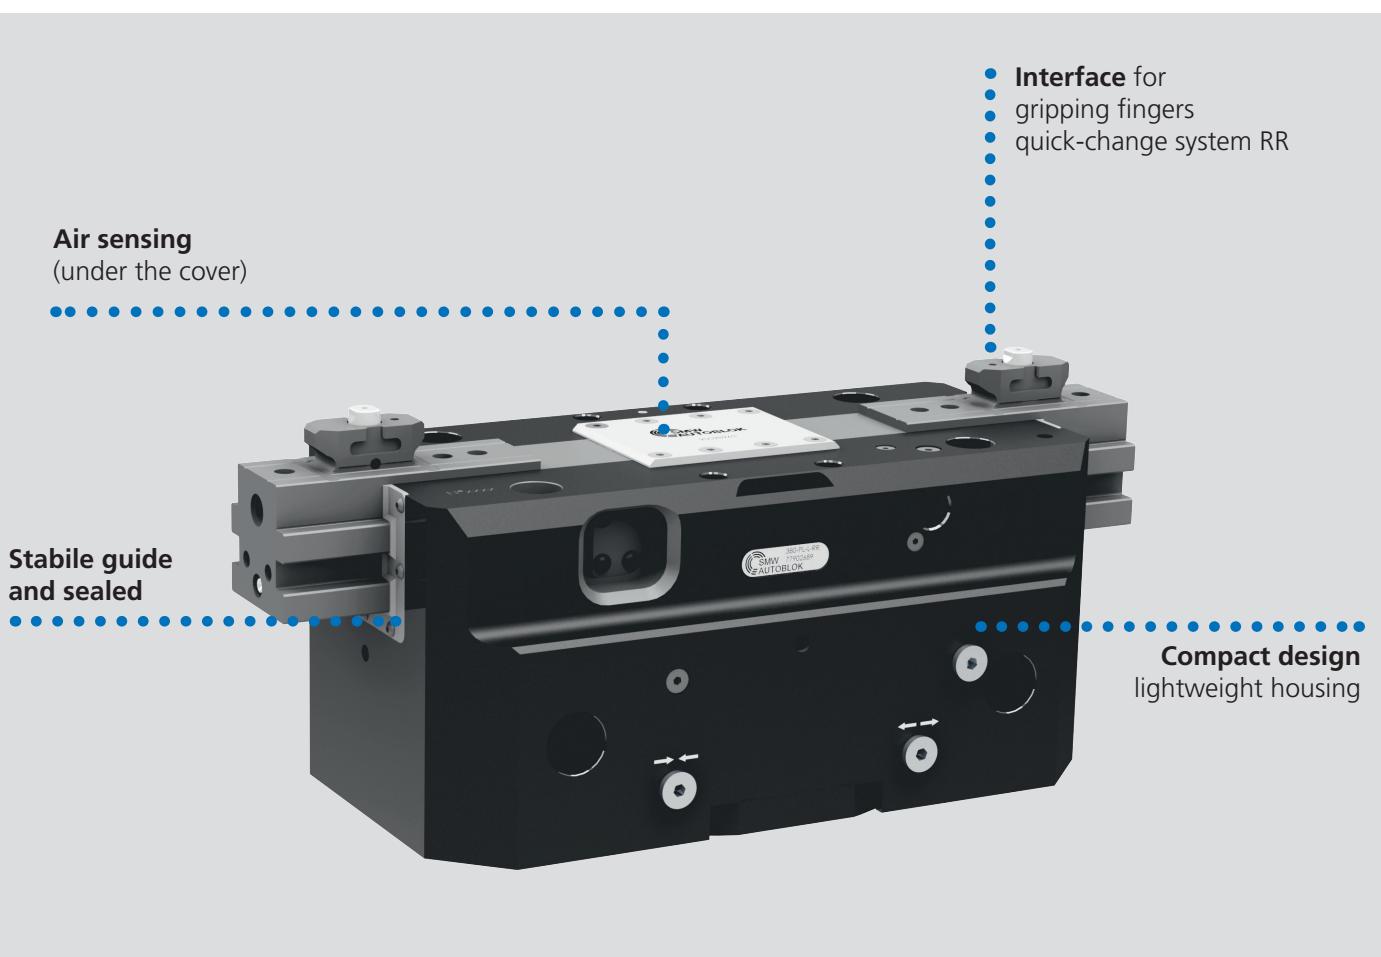

Type	Id. No.	Gripping force (N) at 6 bar	Spring force min. (N)	U (mm) jaw stroke	Air volume (cm³)	Pressure (bar) min./max.	Closing/Opening time (s) at 6 bar	Weight (Kg)	Recommended Workpiece weight (Kg)
PL-N 320 RR	77902583	11.000	----	23,5	1.206,5	2/8	0,5/0,5	27,5	55,0
PLS-N 320 RR	77902783	14.300	3.300	23,5	1.206,5	4/6,5	0,7/0,4	28	55,0
PL-L 320 RR	77902683	6.000	----	45	1.206,5	2/8	0,5/0,5	28	30,0
PLS-L 320 RR	77902883	7.800	1.800	45	1.206,5	4/6,5	0,7/0,4	28,5	30,0
PL-N 380 RR	77902589	16.900	----	26	2.060	2/8	0,6/0,6	41,5	84,5
PLS-N 380 RR	77902789	22.200	5.300	26	2.060	4/6,5	0,9/0,5	42,5	84,5
PL-L 380 RR	77902689	9.250	----	50	2.060	2/8	0,6/0,6	42,5	46,5
PLS-L 380 RR	77902889	12.150	2.900	50	2.060	4/6,5	0,9/0,5	43,5	46,5

L = long stroke, N = normal stroke



Application/customer benefits

- Quick and safe gripper change
- ISO flange pattern
- Integrated media feed-through
- Integrated interlock status query
- Pneumatic drive
- Self-locking by spring tension (turbo)
- Wear-free and maintenance-free, contactless transmission system for energy and signals (optional)

Technical features

- Repeatability 0,015 mm
- Air purge
- Pneumatic nominal pressure 6 bar

Standard equipment

PRS-R (Robot side) or PRS-P (Gripper side) without sensor

PRS



Type Robot Side	PRS-R 55	PRS-R 85	PRS-R 110	PRS-R 160	PRS-R 240
Id. No.	46204550	46204600	46204400	46204320	46204500
Recommended handling weight	20 kg	50 kg	75 kg	150 kg	500 kg
Pull-in force Spring	700 N	2.000 N	2.000 N	2.500 N	12.500 N
Pull-in force Turbo	3.400 N	10.000 N	11.000 N	14.000 N	76.000 N
Repeatability	0,015 mm	0,015 mm	0,015 mm	0,015 mm	0,015 mm
Weight	0,5 kg	1,3 kg	3,0 kg	6,0 kg	16,0 kg

Type Gripper Side	PRS-P 55	PRS-P 85	PRS-P 110	PRS-P 160	PRS-P 240
Id. No.	46204565	46204615	46204415	46204330	46204515
Recommended handling weight	20 kg	50 kg	75 kg	150 kg	500 kg
Pull-in force Spring	-	-	-	-	-
Pull-in force Turbo	-	-	-	-	-
Repeatability	0,015 mm	0,015 mm	0,015 mm	0,015 mm	0,015 mm
Weight	0,3 kg	0,7 kg	1,9 kg	4,3 kg	9,5 kg

Notes

Inductive Coupling System

Overview



- Contact free transmission of energy and signals
- Operation and control of grippers

F180 ETH: Compatible with MX-L grippers

- Diameter Ø 180 mm
- Pass through Ø 85 mm
- Power supply 24 V / 48 V
- Transmission distance 0 - 5 mm
- Energy transmission 240 W (24 V) / 400 W (48 V)
- Signal transmission Ethernet 100 Base-T
- Protection class: IP67

F100-2IOL: Compatible with MX-S/MX-M/MX-U grippers

- Diameter Ø 100 mm
- Pass through Ø 50 mm
- Power supply 24 V
- Transmission distance 0 - 4 mm
- Energy transmission 75 W (24 V)
- Signal transmission 2x IO-Link (COM 1, COM 2, COM 3)
- Protection class: IP67

Application Example: 360° rotation of the MX-M 080 gripper



F100

F100 2x IO-Link-Link Transmission

- OD = 100 mm
- ID = 50 mm
- Height = 25 mm
- Energy transmission ~ 75 W / 24 V

3 Product Lines

- MX-S Small
- MX-M Medium
- MX-L Large
- MX-U Universal



Inductive Coupling System

Overview

■ Contact free transmission of energy and signals



C40-IOL / C40-2x 0-10V / 6PNP

- Cubical coupling system (40x45x22 mm)
- Ideal suited for EOAT applications, no plug connection necessary
- Power supply 24 V
- Transmission distance 0 - 3 mm
- Energy transmission 15 W (24 V)
- Signal transmission:
 - IO-Link (COM 1, COM 2, COM 3) / 6 PNP Signals + 2 Analog signals 0-10 V
- Hybrid Dynamic Pairing: Base IO-Link can be used with remote IO-Link or 2x 0-10 V/6 PNP
- IP67 Protection class
- Simple retrofit solutions thanks to standardized mounting kits for different replacement systems.

Application Example: Replacement of feed-through modules (power/signals) with contact pins

PRS-R Robot side

PRS-R quick change system

PRS-P Gripper side

PRS-P quick change system

Gripper

Inductive Coupling System
C40 Automation
Base

SIGNAL
ENERGY

- Non-contact
- Wear-free

Inductive Coupling System
C40 Automation
Remote

Axial coupler



Inductive Coupling System

■ Contact free transmission of energy and signals

Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Robotic (End of Arm Tooling), Automation, Mechanical engineering
- Substitution of slip ring / connector
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: temperature monitoring, foreign object detection, reverse polarity protection
- Status LED with good visibility


Technical features

- Diameter 100 mm / Through hole 50 mm
- Operating voltage 24 V / max. 6 A
- Transmission distance 0 - 4 mm
- Transmission of energy 24 V / 75 W
- Transmission of signals: 2 x IO-Link (COM 1, COM 2, COM 3)
- Connections: Base: 2x M12 x 1 male 5-pin, Remote: 2x M12 x 1 female 5-pin
- Protection class: IP67

Standard equipment

Inductive coupler base or remote

Block diagram

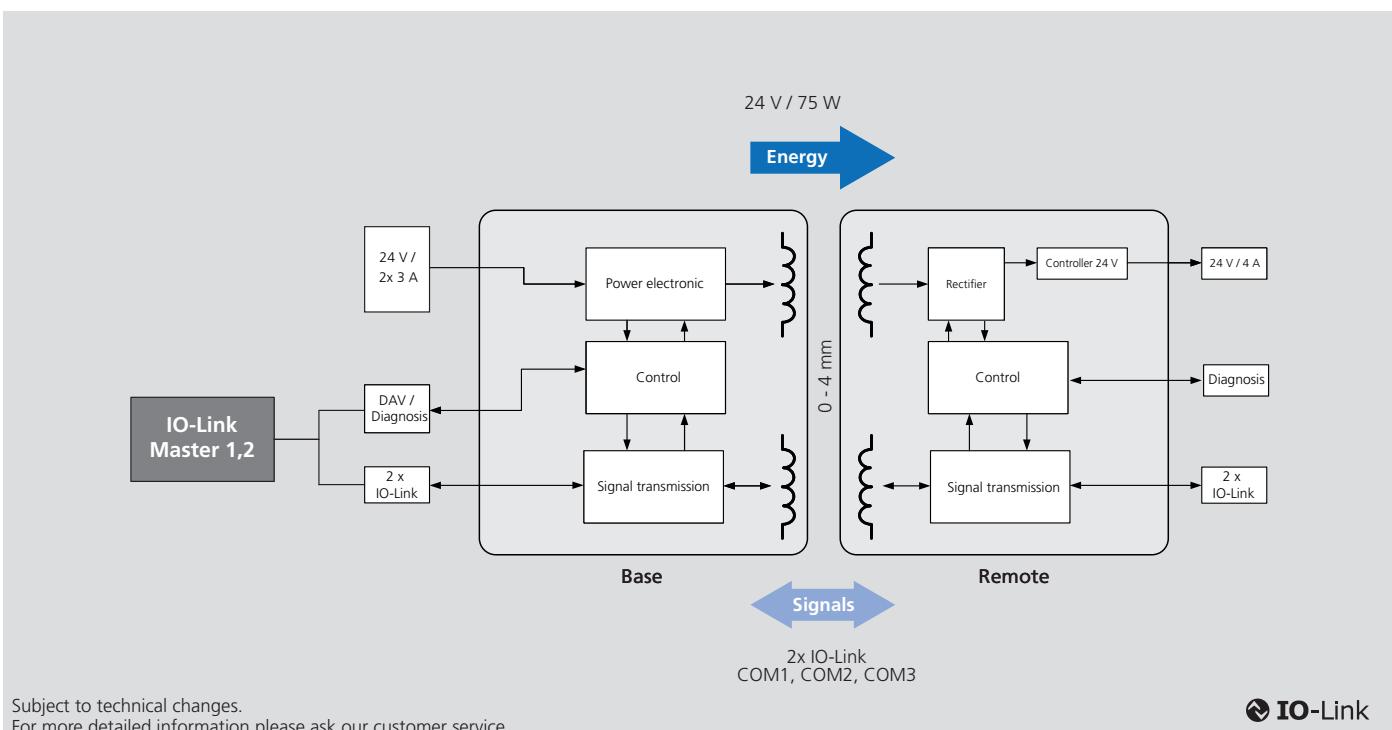

Subject to technical changes.

For more detailed information please ask our customer service.





IO-Link

Inductive coupling system F100-2IOL

Type	Base	Remote
Id. No.	0E012330	0E012331
Operating temperature (housing surface)		-20 °C ... +60 °C
Storage temperature		-20 °C ... +60 °C
Transmission distance		0 mm ... 4 mm
Operating voltage	24 V	-
Output voltage	-	24 V (75 W)
Signal transmission		2x IO-Link (COM2, COM 2, COM 3)
LED		2 LEDs 2-color
Current consumption (Base)	6 A (24 V)	-
Overload protection / short circuit protection	✓	✓
Residual ripple	-	< 50 mV
Reverse polarity protection	✓	-
Data-Valid output		max. 100 mA
Ready delay		< 1 s

- Stationary unit - Base
- Mobile unit - Remote

Axial coupler

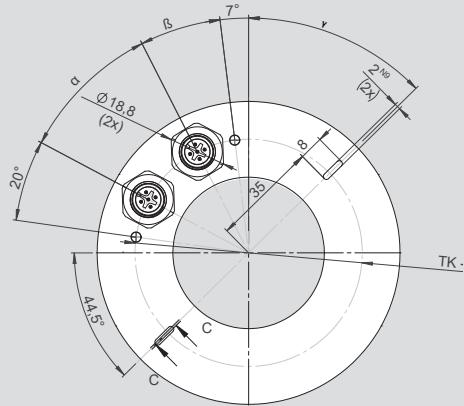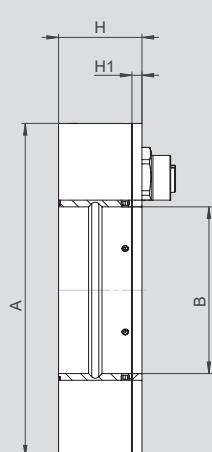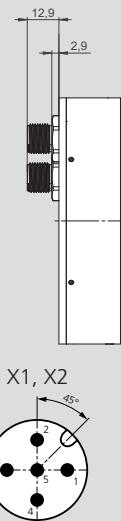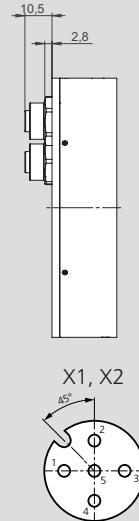Base / Remote:**Base / Remote:****Base:****Remote:**2x Male connector 5-pin
M12 x 12x Female connector 5-pin
M12 x 1

Subject to technical changes.

For more detailed information please ask our customer service.

Inductive coupling system F100-2IOL

Type	Base	Remote
Id. No.	OE012330	OE012331
A	mm	100
B	mm	50
C	mm	1
H	mm	25
H1	mm	3
α	degree	35
β	degree	20
γ	degree	45.5
Housing material		Al, GFK
Protection class		IP67
Weight	kg	0,224 0,237

Function LED IO-Link Base (X1, X2)**LED Power**

Color	Yellow / red
	Yellow » SIO mode active and SIO signal is high
	Flash yellow (1000 ms on, 100 ms off), » IO-Link communication active, power is on, Remote was detected
Function	Flashing 2 Hz yellow » no IO-Link device detected, power on, no Remote detected
	Flashing 2 Hz red » Short circuit on IO-Link PIN
	Flashing 5 Hz red » Overload voltage output Remote

Function LED IO-Link Remote (X1, X2)**LED Power**

Color	Yellow / red
	Yellow » SIO mode active and SIO signal is high
	Flash yellow (1000 ms on, 100 ms off), » IO-Link communication active, power is on, Base has been detected
Function	Flashing 2 Hz yellow » No IO-Link communication, power on, no Base detected
	Flashing 2 Hz red » Short circuit on IO-Link PIN
	Flashing 5 Hz red » Overload voltage output Base

PIN assignment	PIN	X1 Base	X2 Base	X1 Remote	X2 Remote
Supply voltage	1	24 V IN	24 V IN	24 V OUT	24 V OUT
Data-Valid	2	DAV 24 V	-	-	-
Ground	3	GND	GND	GND	GND
IO-Link Signal	4	IO-Link CQ	IO-Link CQ	IO-Link CQ	IO-Link CQ
-	5	-	-	-	-

F100-2IOL



F100-ETH

Axial coupler

Inductive Coupling Systems



■ Ordering overview flange

Standard flange

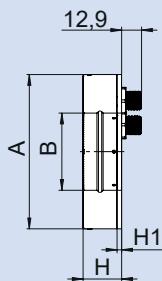



Type	IC-Base F100-2IOL D100/050	IC-Base F100-ETH D100/050
Id.-No.	OE012330	OE011420
A	100	
B	50	
B1	-	
B2	-	
H	25	
H1	3	

Outer flange with feed-through

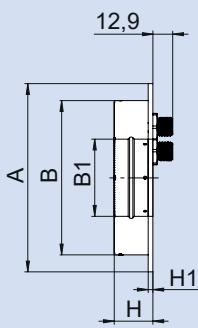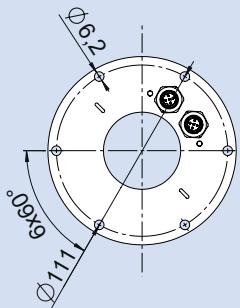



Type	IC-Base F100-2IOL D122/050	IC-Base F100-ETH D122/050
Id.-No.	OE012332	OE012320
A	122	
B	100	
B1	50	
B2	-	
H	25	
H1	3	

Inner flange with feed-through

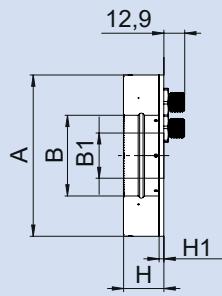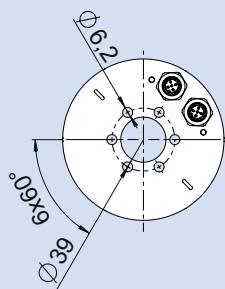

Type	IC-Base F100-2IOL D100/028	IC-Base F100-ETH D100/028
Id.-No	OE012334	OE012322
A	100	
B	50	
B1	28	
B2	-	
H	25	
H1	3	

Flangering with feed-through

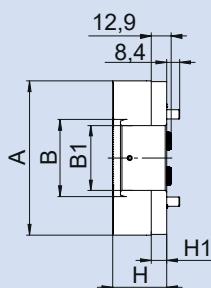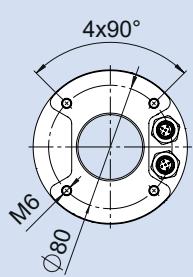

Type	IC-Base F100-2IOL D100/042	IC-Base F100-ETH D100/042
Id.-No	OE012336	OE012324
A	100	
B	50	
B1	42	
B2	-	
H	25	
H1	10	

FURTHER OPTIONS AVAILABLE ON REQUEST!

- Outer flange without feed-through
- Inner flange without feed-through
- Threaded sleeve with without feed-through

Notes

F180 Ethernet

Axial coupler



Inductive Coupling System

■ Contact free transmission of energy and signals

Application/customer benefits

- Contact free transmission of energy and signals between moving / rotating and stationary components
- Application examples: Packaging machines, special machines, automation, machine tools, printing machines, robot applications (EOAT)
- Substitution of slip ring / connector
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: Temperature monitoring, foreign object detection
- Status LED with good visibility


Technical features

- Diameter: 180 mm / Through hole: 85 mm
- Operating voltage: 24 V or 48 V
- Transmission distance: 0 - 5 mm at 24 V or 0 - 3 mm at 48 V
- Energy transmission: 24 V / 240 W or 48 V / 400 W (adjustable)
- Signal transmission: Ethernet 100 Base-T
- Transmission bandwidth < 5 MBit/s
- Connections: M12 Ethernet (D-coded), M12 Diagnosis (A-coded), terminal block (Energy)
- Protection class: IP67

Standard equipment

Inductive coupler base oder remote

Block diagram

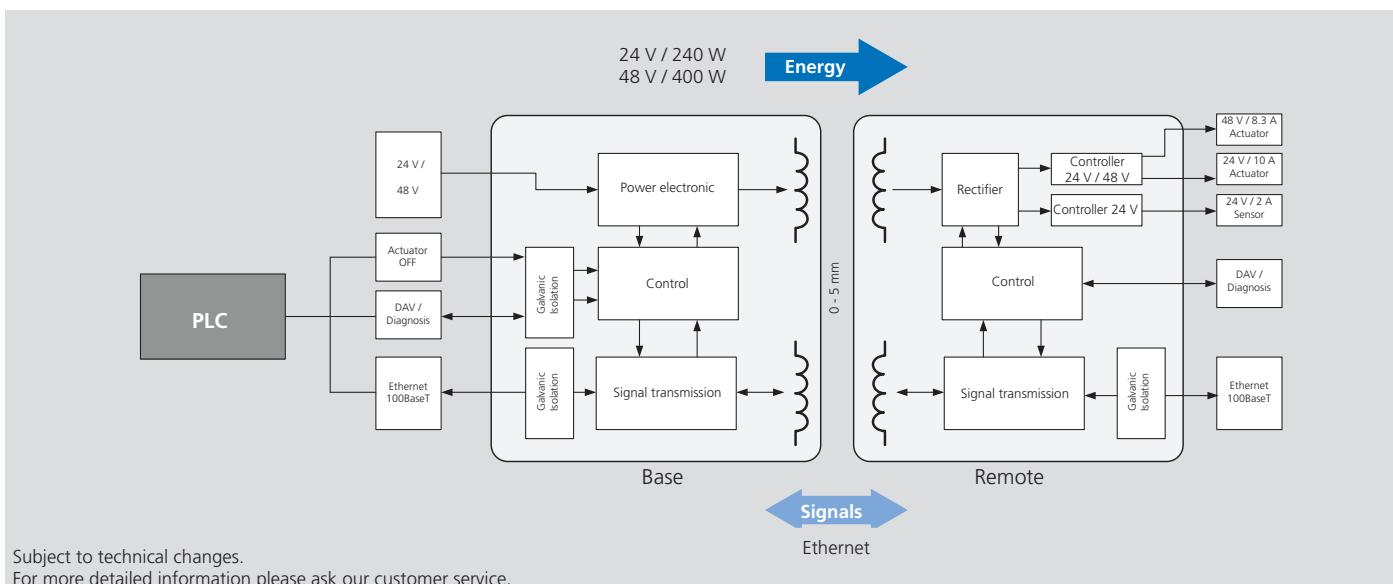

Subject to technical changes.

For more detailed information please ask our customer service.

Inductive coupling system F180 Ethernet		
Type	Base	Remote
Id. No.	OE011246	OE011247
Operating temperature (body surface)		-20° C ... +60° C
Stocking temperature		-20° C ... +60° C
Transmission distance	0 mm ... 5 mm (24 V) 0 mm ... 3 mm (48 V)	
Operating voltage	24 V / 48 V	-
Output voltage (Actuator supply)*	-	24 V DC / 10 A 48 V DC / 8.3 A
Output voltage (Sensor supply)*	-	24 V DC / 4 A
Signal transmission		Ethernet 100 Base-T
LED function display		3 LEDs 2-color
Current consumption (base)	15 A (24 V) 12 A (48 V)	-
Overload protection / short-circuit protection	✓	✓
Reverse polarity protection	-	< 50 mV
Data valid output	max. 100 mA	-
Ready delay		< 5 s

*max 400 W total


Inductive Coupling System

- Stationary Unit - Base
- Mobile Unit - Remote


F180 Ethernet

Axial coupler


Base / Remote:

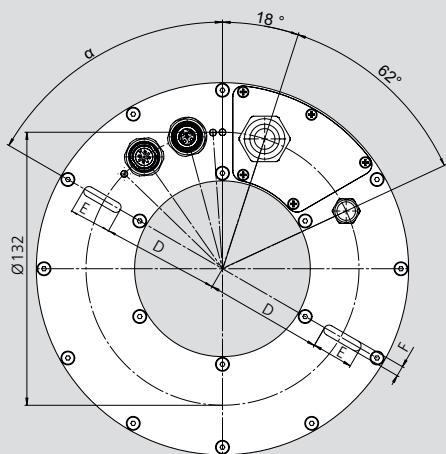


Base / Remote:

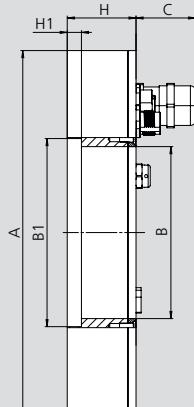

Base:



Remote:



Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system F180 Ethernet

Type		Base	Remote		
Id. No.		0E011246	0E011247		
A	mm		180		
B	mm		85		
B1	mm		93		
C	mm		29.5		
D	mm		57		
E	mm		20		
F	mm		5		
H	mm		34		
H1	mm		7		
a	degree		60		
Housing material		Al, GFK			
Protection class		IP67			
Weight	kg	1,172	1,275		
Function Base					
LED Power					
Color	Green/red				
Function	Off » Unit not supplied with voltage (or undervoltage)				
	On (green) » Voltage ok and mobile unit has been detected				
	2 Hz green 50/ 50% » Operating temperature in critical range				
	1 Hz green 25/75% » Voltage ok but no mobile unit detected				
Function	1 Hz red/green » Incompatible mobile unit detected				
	2 Hz red » Foreign element detected				
	5 Hz red » Internal error				
LED Signal transmission Ethernet					
Color	Yellow/red				
Function	Off » No mobile unit detected				
	On/yellow » Signal transmission ready				
	1 Hz yellow » Data packets are being transmitted				
	3 Hz yellow » 50% of the transmission bandwidth used (10 s)				
Function	8 Hz red » Data packets were discarded (in the last 10 s)				
	On/red » Error in data transmission (internal error)				
LED Energy transmission					
Color	Yellow/red				
Function	Off » No mobile unit detected				
	On (yellow) » Unit coupled, voltage output ok				
	1 Hz red/yellow » Short circuit at voltage output sensor				
	3 Hz red/yellow » Short circuit at voltage output actuator				
Function	3 Hz red » Short circuit at both voltage outputs				
	5 Hz red » Internal error				
Function Remote					
LED Actuator					
Color	Green/red				
Function	Off » Unit not paired				
	On (green) » Unit paired, voltage output actuator ok				
	Flashes 2 Hz red » Unit paired but short circuit on actuator				
	Flashes 5 Hz red » Internal error				
LED Sensor supply					
Color	Green/red				
Function	Off » Unit not paired				
	On (green) » Unit paired, voltage output sensor (24 V) ok				
	Flashes 2 Hz red » Unit paired but short circuit on sensor (24 V)				
	Flashes 5 Hz red » Internal error				
LED Signal transmission					
Color	Yellow/red				
Function	Off » No mobile unit detected				
	On/yellow » Signal transmission ready				
	Flashes 1 Hz yellow » Data packets are being transmitted				
	Flashes 3 Hz yellow » 50% of the transmission bandwidth used (10 s)				
Function	Flashes 8 Hz red » Data packets were discarded (in the last 10 s)				
	On/red » Error in data transmission (internal error)				



F180 Ethernet

Inductive Coupling System

Axial coupler



■ Ordering review flanges

Standard flange

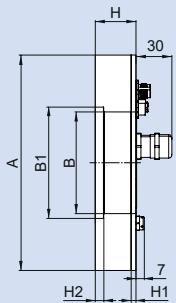



Type	IC-Base F180 Ethernet D180/085
Id.-No.	OE011246
A	180
B	85
B1	93
B2	-
H	34
H1	4
H2	7

Outer flange with feed-through

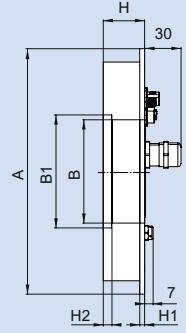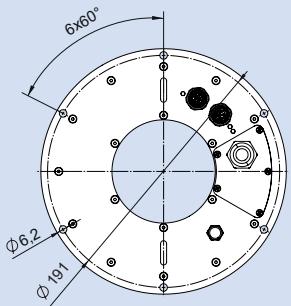



Type	IC-Base F180 Ethernet D202/085
Id.-No.	OE012340
A	202
B	85
B1	93
B2	-
H	34
H1	4
H2	7

Inner flange with feed-through

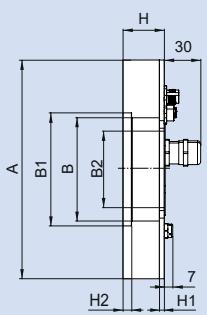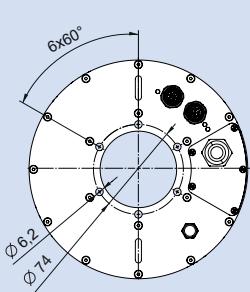

Type	IC-Base F180 Ethernet D180/063
Id.-No.	OE012342
A	180
B	85
B1	93
B2	63
H	34
H1	4
H2	7

Flange ring with feed-through

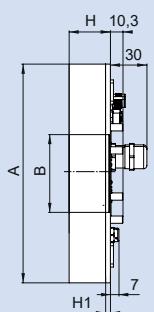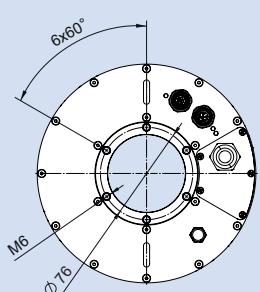

Type	IC-Base F180 Ethernet D180/064
Id.-No.	OE012344
A	180
B	64
B1	-
B2	-
H	34
H1	4
H2	-


FURTHER OPTIONS AVIABLE ON REQUEST!

- Outer flange without feed-through
- Inner flange without feed-through
- Threaded sleeve with feed-through

Notes

C40 AUTOMATION PRODUCT FAMILY


Hybrid Dynamic Pairing

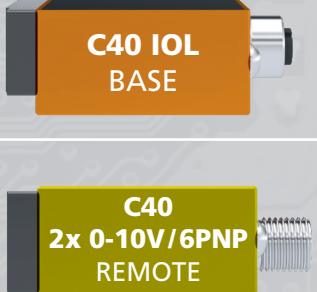OPERATION with IO-Link sensors (Devices)	 C40 IOL REMOTE	
OPERATION of 2 analog (0-10V) + 6 digital (PNP) signals direction switchable (bidirectional)	 C40 2x 0-10V/6PNP REMOTE	<ul style="list-style-type: none">• C40 remote units are compatible with each other and can be combined• Consistent IO-Link functionality• Identification via IO-Link parameters device name, • IO-Link tag possible

Application example of change systems


(Pallet change, tool change, format change): Remote - interchangeable units

Variants: Combination of 2 C40 systems

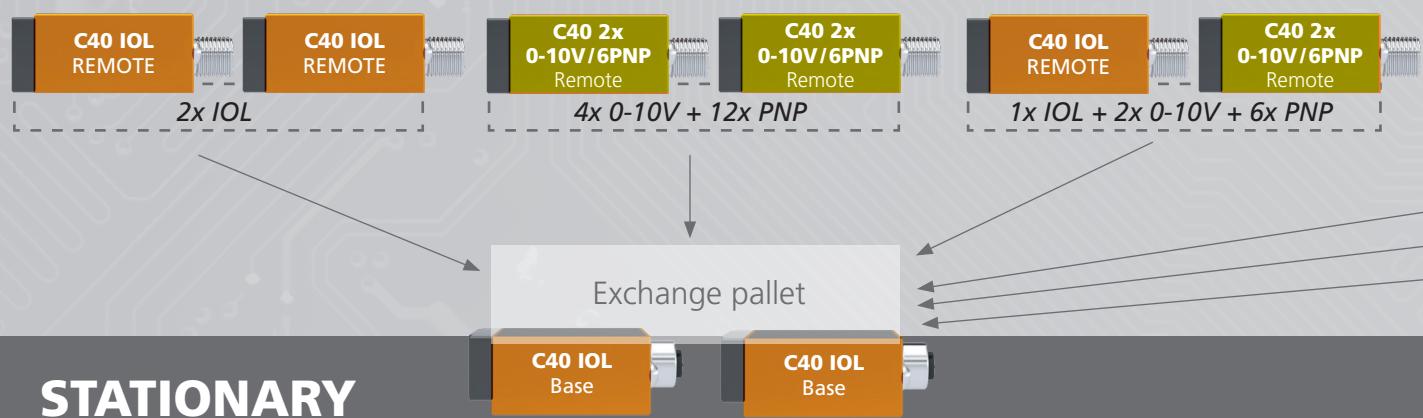

Hybrid Dynamic Pairing

**C40 IOL BASE + C40 IOL REMOTE or
C40-2x 0-10V / 6x PNP REMOTE**

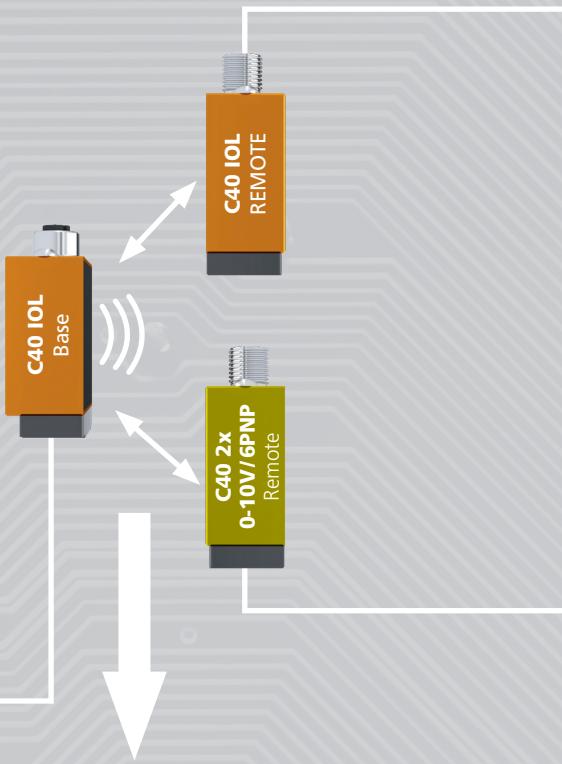


**IO-Link Device
(sensor)**



**2x Analog signals 0-10V and
6x PNP digital switching
signals**



IO-Link and analog/digital remote can be switched dynamically during operation.

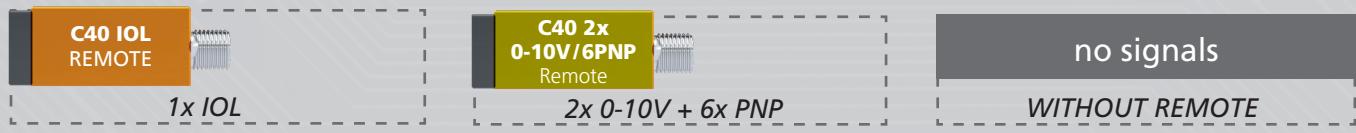

The **remote exchangeable pallets** can be changed dynamically during operation with the stationary **C40 IOL Base unit**.

C40-IOL

Axial coupler


Inductive Coupling System

- Contact free transmission of energy and signals
- Ideal for gripper changing systems and pallet change applications



 **IO-Link**

Block diagramm

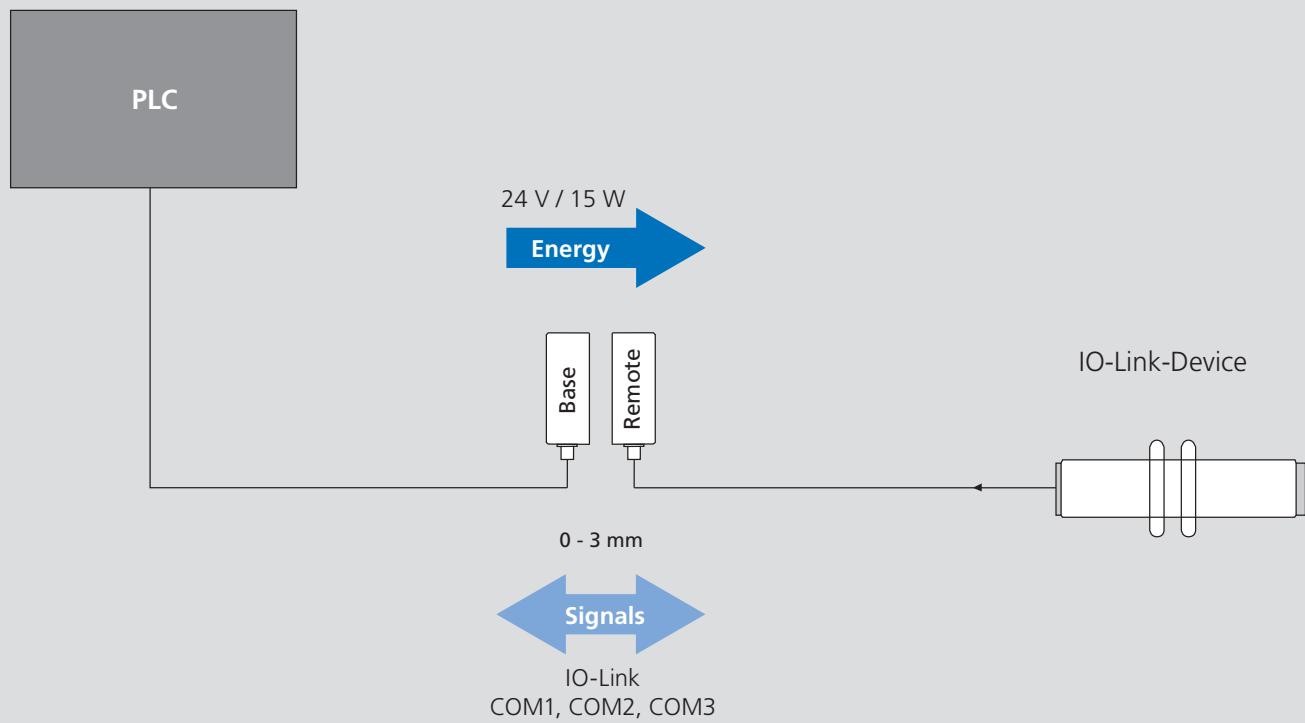

Subject to technical changes.
For more detailed information please ask our customer service.



 **IO-Link**

Inductive Coupling System

C40-IOL

- Contact free transmission of energy and signals
- Ideal for gripper changing systems and pallet change applications

Axial coupler

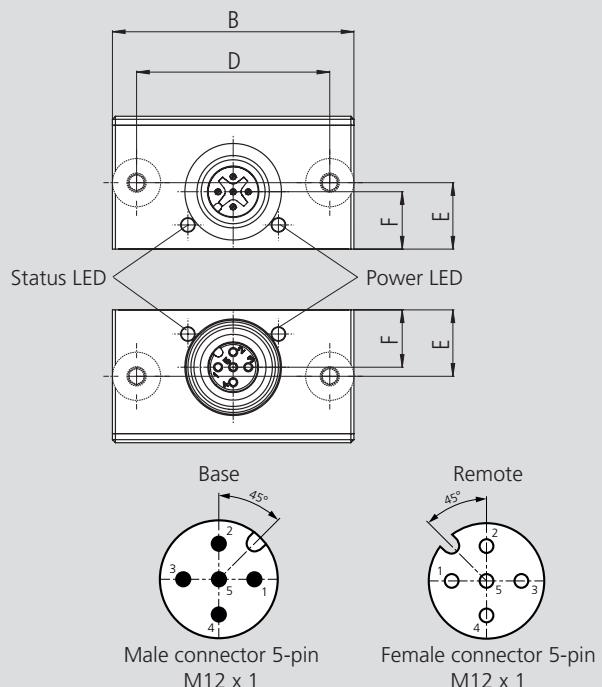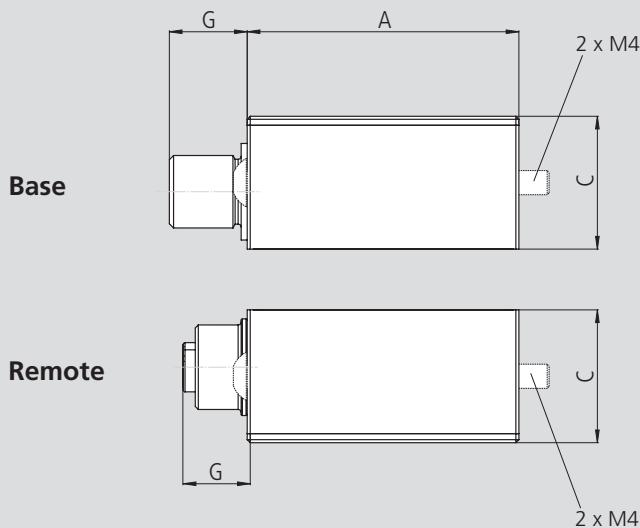

Subject to technical changes.
For more detailed information please ask our customer service.

Inductive coupling system C40-IOL

Type	Base	Remote
Id. No.	0E012615	0E012616
A mm		45
B mm		40
C mm		22
D mm		32
E mm		11
F mm		9.5
G mm	13	10.6
Housing material	AL, V2A, FR4	
Protection class	IP67	
Operating temperature	-25° C ... +50° C	
Storage temperature	-25° C ... +80° C	
Transmission distance	0 - 3 mm	
Weight kg	0,087	0,086
Operating voltage	24 V (18 ... 30 V)	-
Output voltage	-	24 V ± 10% DC
Power consumption (Base)	2000 mA	-
Power output (Remote)	-	625 mA
Overload protection / short circuit protection	✓	✓
Residual ripple	-	< 200 mV
Reverse polarity protection	✓	-
Temperature monitoring	✓	✓
Data-Valid Output	150 mA	-
Ready delay	< 600 ms	
PIN assignment	Signal Base	Signal Remote
Supply voltage	1 24 V IN	24 V OUT
Digital signal	2 -	-
Ground	3 GND	GND
IO-Link Signal	4 IO-Link CQ	IO-Link CQ
Data-Valid	5 DAV 24 V	-

C40-2x 0-10V / 6PNP

Axial coupler

Inductive Coupling System

- Contact free transmission of energy and signals
- Ideal for gripper changing systems and pallet change applications
- Integrated IO-Link sensor hub

Application/customer benefits

- Contact free transmission of energy and signals between moving and stationary components
- Application examples: Operation of sensors in gripper changing systems (EOAT) and pallet change applications
- Integrated IO-Link sensor hub
- Plug & work retrofit kits
- Dynamic Pairing
- Wear and maintenance free
- Protective functions: Temperature monitoring, foreign object detection, reverse polarity protection


Technical features

- Mounting via 2 x M4 mounting screws (stainless steel)
- Operating voltage 24 V (18 ... 30 V)
- Transmission distance 0 - 3 mm
- Transmission of energy 24 V / 15 W
- Transmission of signals: 6 x PNP, 2 x Analog 0 - 10 V
- Connections: Base: M12 x 1 male 12-pin, Remote: M12 x 1 female 12-pin
- Protection class: IP67

Standard equipment

Inductive coupler base or remote with each 2 mounting bolts

Block diagram

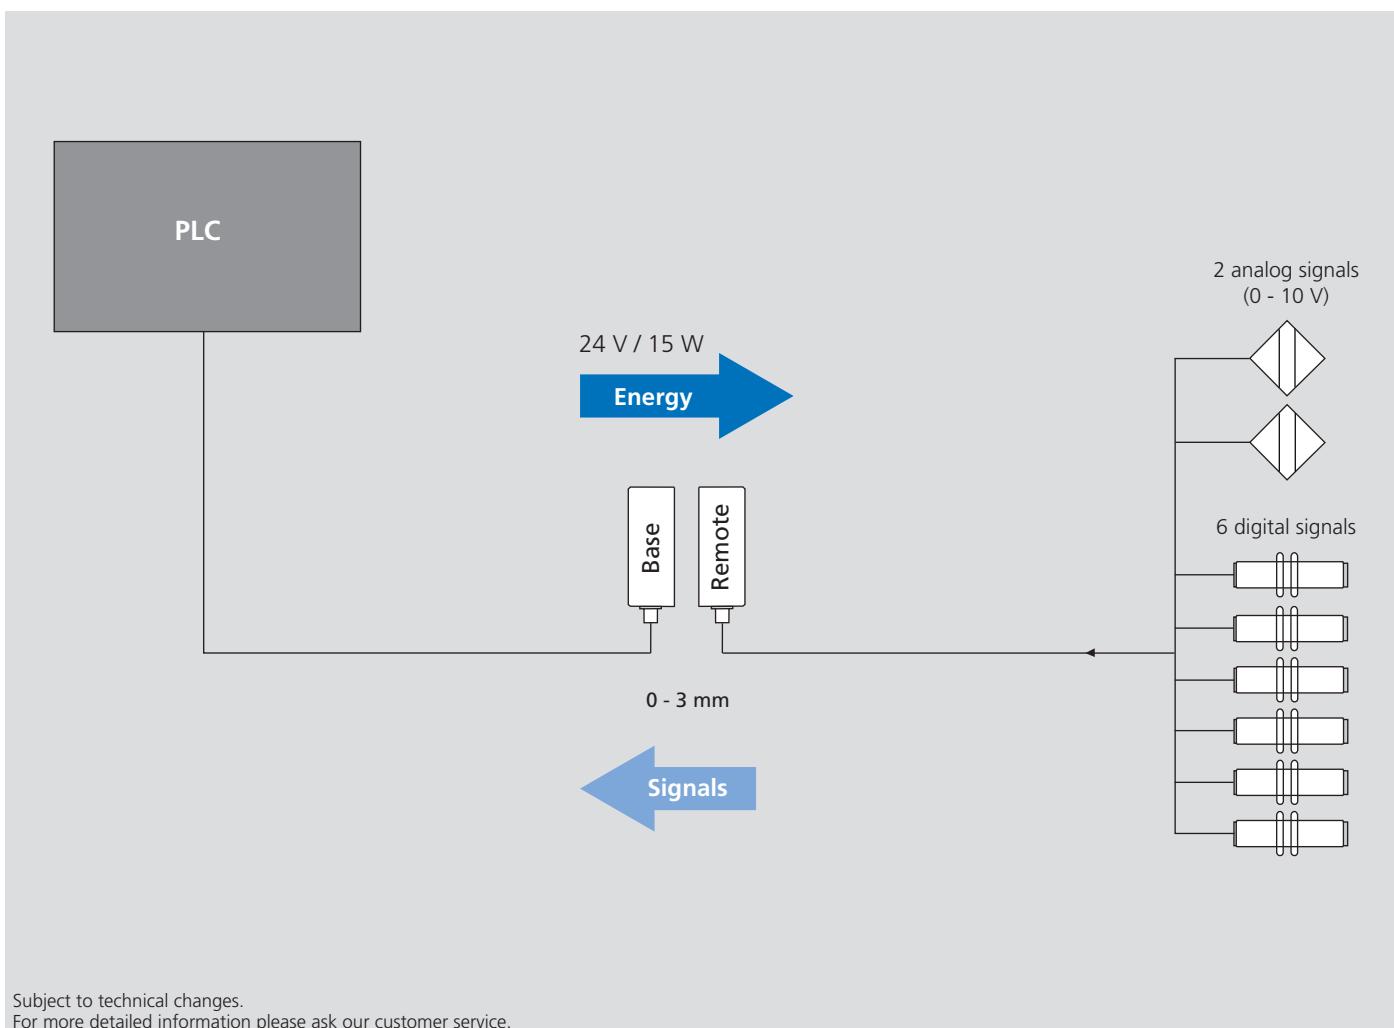

Subject to technical changes.
For more detailed information please ask our customer service.



Inductive Coupling System

- Contact free transmission of energy and signals
- Ideal for gripper changing systems and pallet change applications
- Integrated IO-Link sensor hub

C40-2x 0-10V /

6PNP

Axial coupler

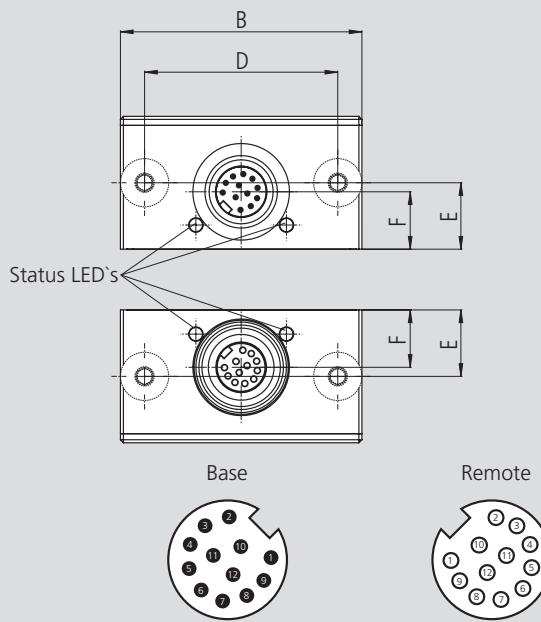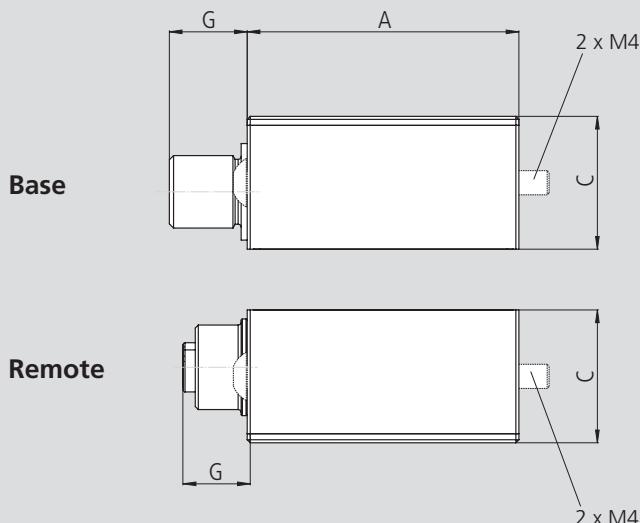

Subject to technical changes.

For more detailed information please ask our customer service.

Inductive coupling system C40-2x 0-10V / 6PNP

Type	Base	Remote
Id. No.	0E012720	0E012721
A	mm	45
B	mm	40
C	mm	22
D	mm	32
E	mm	11
F	mm	9.5
G	mm	13 10.6
Housing material		AL
Protection class		IP67
Operating temperature		-25°C ... +50°C
Storage temperature		-25°C ... +80°C
Transmission distance		0 - 3 mm
Weight	kg	0,087 0,086
Operating voltage	24 V (18 ... 30 V)	-
Output voltage	-	24 V ± 10% DC
Power consumption (Base)	2000 mA	-
Power output (Remote)	-	625 mA
Overload protection / short circuit protection	✓	✓
Residual ripple	-	< 200 mV
Reverse polarity protection	✓	-
Temperature monitoring	✓	✓
Data-Valid Output	150 mA	-
Ready delay		< 600 ms
Ready for operation (switching on the entire system)		< 1200 ms
Ready for operation (approach remote to switched-on base)		< 600 ms
Delay on signal change (analog signal / digital signal)		< 20 ms / <10 ms

PIN assignment		Signal Base	Signal Remote
Supply voltage	1	24 V IN	24 V OUT
Ground	2	GND	GND
Digital signal 1	3	0/24 V OUT	0/24 V IN
Digital signal 2	4	0/24 V OUT	0/24 V IN
Digital signal 3	5	0/24 V OUT	0/24 V IN
Digital signal 4	6	0/24 V OUT	0/24 V IN
Digital signal 5	7	0/24 V OUT	0/24 V IN
Digital signal 6	8	0/24 V OUT	0/24 V IN
Analog signal 1	9	0 ... 10 V OUT	0 ... 10 V IN
Analog signal 2	10	0 ... 10 V OUT	0 ... 10 V IN
Ground Analog signal	11	Analog GND *	Analog GND *
Data-Valid	12	DAV 24 V	-

* For analog operation, analog GND and GND must be connected externally.



Application/customer benefits

- Inductive proximity sensor
- Flexible use with versatile mounting options
- Compact and rigid design


Technical features

- 2 mm flush
- Temperature range -40 ... +85 °C
- Operating voltage 24 V
- M8 x 1 Mounting
- Digital signal output PNP normally open (NO)
- Protection class: IP67

Standard equipment

IPS 4.0 M08-PNP
2 self locking nuts M8


OE012802

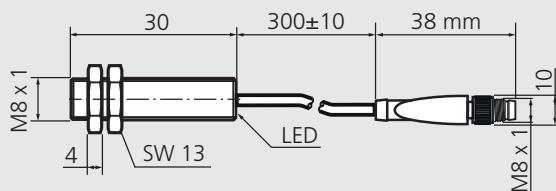


Pin Assignment

Pin	Description
1	24 V DC (brown)
3	GND (blue)
4	Normally open (NO) (black)

Male connector




OE012803

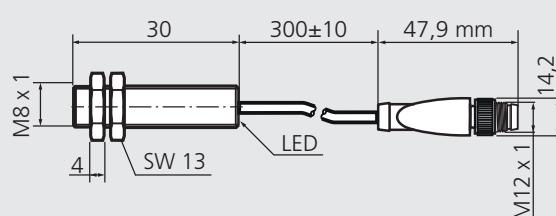


Pin Assignment

Pin	Description
1	24 V DC (brown)
2	NC
3	GND (blue)
4	Normally open (NO) (black)

Male connector




OE012804

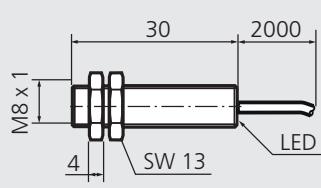

Wire Assignment

Description
24 V DC (brown) (1)
GND (blue) (3)
Normally open (NO) (black) (4)

Connection

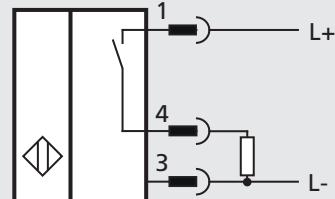

Technical data

Type	IPS 4.0 M08-PNP	IPS 4.0 M08-PNP	IPS 4.0 M08-PNP
Id. No.	OE012802	OE012803	OE012804
Switching function		Normally open (NO)	
Output type		PNP	
Rated operating distance		2 mm	
Installation		Flush	
Assured operating distance		0 ... 1.62 mm	
Operating voltage U_B		5 ... 30 V	
Switching frequency		0 ... 6000 Hz	
Reverse polarity protection		Reverse polarity protected	
Operating current		0 ... 100 mA	
No-load supply current		≤ 10 mA	
Switching state indicator		LED yellow	
MTTF _d		960 a	
Mission time (T_M)		20 a	
Diagnostic Coverage (DC)		0 %	
Ambient temperature		-40 ... +85 °C	
Connection type	Cable connector M8 x 1, PUR, 300 mm	Cable connector M12 x 1, PUR, 300 mm	Cable PUR, 2000 mm
Core cross section		0.14 mm ²	
Housing material		Brass, nickel plated	
Protection class		IP67	
Weight	0,04	0,04	0,05
Threading		M8	

**Application/customer benefits**


- Inductive positioning sensor
- Flexible use with versatile mounting options
- High accurate distance measuring
- Compact and rigid design

Technical features


- 2 mm Flush
- Temperature range -10 ... +70 °C
- Operating voltage 12 ... 36 V DC
- M8 x 1 Mounting
- Protection class: IP67

Standard equipment

IPS 4.0 M08-0-10V
2 self locking nuts M8

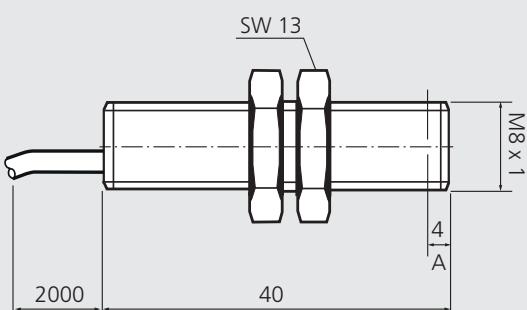**Wire Assignment****Wire Description**

- | | |
|---|----------------------|
| 1 | 24 V DC (brown) |
| 3 | GND (blue) |
| 4 | 0-10V output (black) |

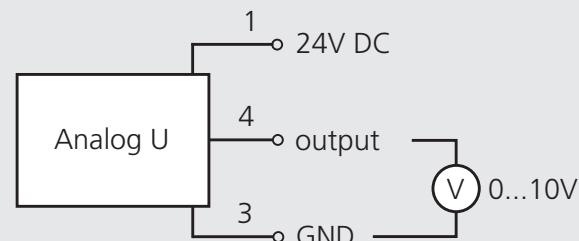Connection**Technical data**

Type	IPS 4.0 M08-0-10V
Id. No.	OE012810
Installation	flush
Measuring distance	0 ... 2 mm
Repeat accuracy	< 0.02 mm
Linearity error	± 60 µm (S = 0,5 ... 1,5 mm), ± 140 µm (S = 0 ... 2 mm)
Temperature drift	± 3 % (Full Scale: 0 ... +60 °C), ± 5 % (Full Scale: -10 ... +70 °C)
Response time	< 0.5 ms
Operating voltage	12 ... 36 V DC
No-load supply current max.	10 mA
Output circuit	Voltage output
Output signal	0 ... 10 V DC
Reverse polarity protection	Yes
Housing material	Stainless steel
Dimension	8 mm
Housing length	40 mm
Connection type	Cable, 2000 mm
Tightening torque max.	10 Nm
Ambient temperature	-10 ... +70 °C
Protection class	IP67
Weight	0,049

IPS 4.0 8.8x24.6-0-10V e-sensing

Inductive positioning sensor



Application/customer benefits


- Inductive positioning sensor
- Flexible use with versatile mounting options
- High accuracy distance measuring

Technical features

- 3 mm flush
- Temperature range -20 ... +70 °C
- Operating voltage 12 ... 30 V DC
- Protection class: IP67

Standard equipment

IPS 4.0 8.8x24.6-0-10V

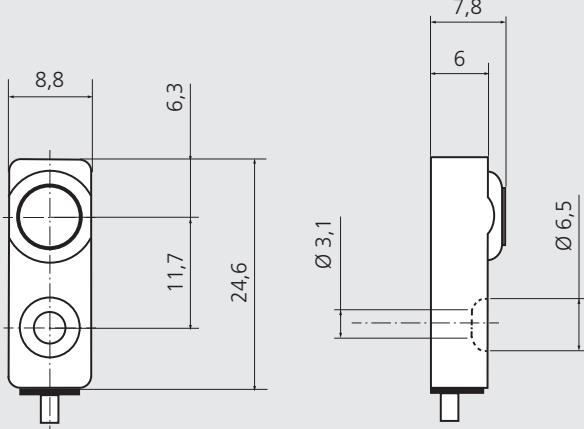


Wire Assignment

Wire Description

- | | |
|---|----------------------|
| 1 | 24 V DC (brown) |
| 2 | Teach In (white) |
| 3 | GND (blue) |
| 4 | 0-10V output (black) |

Connection

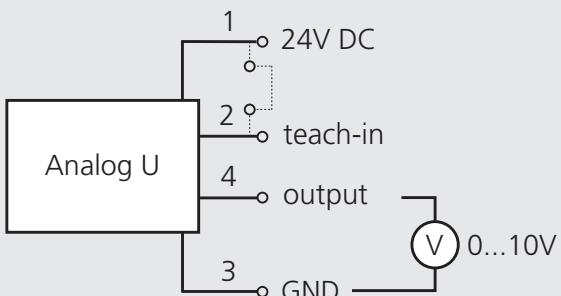

Technical data

Type	IPS 4.0 8.8x24.6-0-10V
Id. No.	212282
Installation	Nearly Flush
Measuring distance	0 ... 3 mm
Repeat accuracy	< 0.01 mm
Linearity error	± 10 µm (S = 0 ... 2 mm), ± 90 µm (S = 0 ... 3 mm)
Temperature drift	± 2 % (Full Scale: S = 0 ... 2 mm), ± 6 % (Full Scale: S = 0 ... 3 mm)
Response time	< 2 ms
Operating voltage	12 ... 30 V DC
No-load supply current max.	10 mA
Output circuit	Voltage output
Output signal	0 ... 10 V DC
Reverse polarity protection	Yes
Housing material	Stainless steel
Connection type	Cable PUR, 2000 mm
Tightening torque max.	0,8 Nm
Ambient temperature	-20 ... +70 °C
Protection class	IP67
Weight	0,027

Notes


Digitized Workholding

Long-stroke vises for automation application

SLX digit (Digitized hydraulic long-stroke vise)



More Information



you find here!

SLX e-motion (Mechatronic long-stroke vise)



More Information



you find here!

Zero-Point Clamping Systems for quick-change in automation

APS (Pneumatic drive)




More Information



you find here!

ZeroAct e-motion (Mechatronic drive)

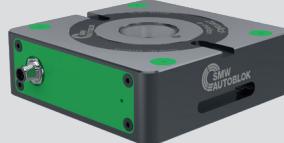

More Information



you find here!



Further products for automation

can be found in our catalog Digit at
www.smw-autoblok.com website.


Notes

Application examples

Inductive coupling system with hollow shaft allows for non-contact energy and signal transmission and endless 360° rotation on both sides for the MX-L 520 long-stroke gripper.




Automated quick jaw change

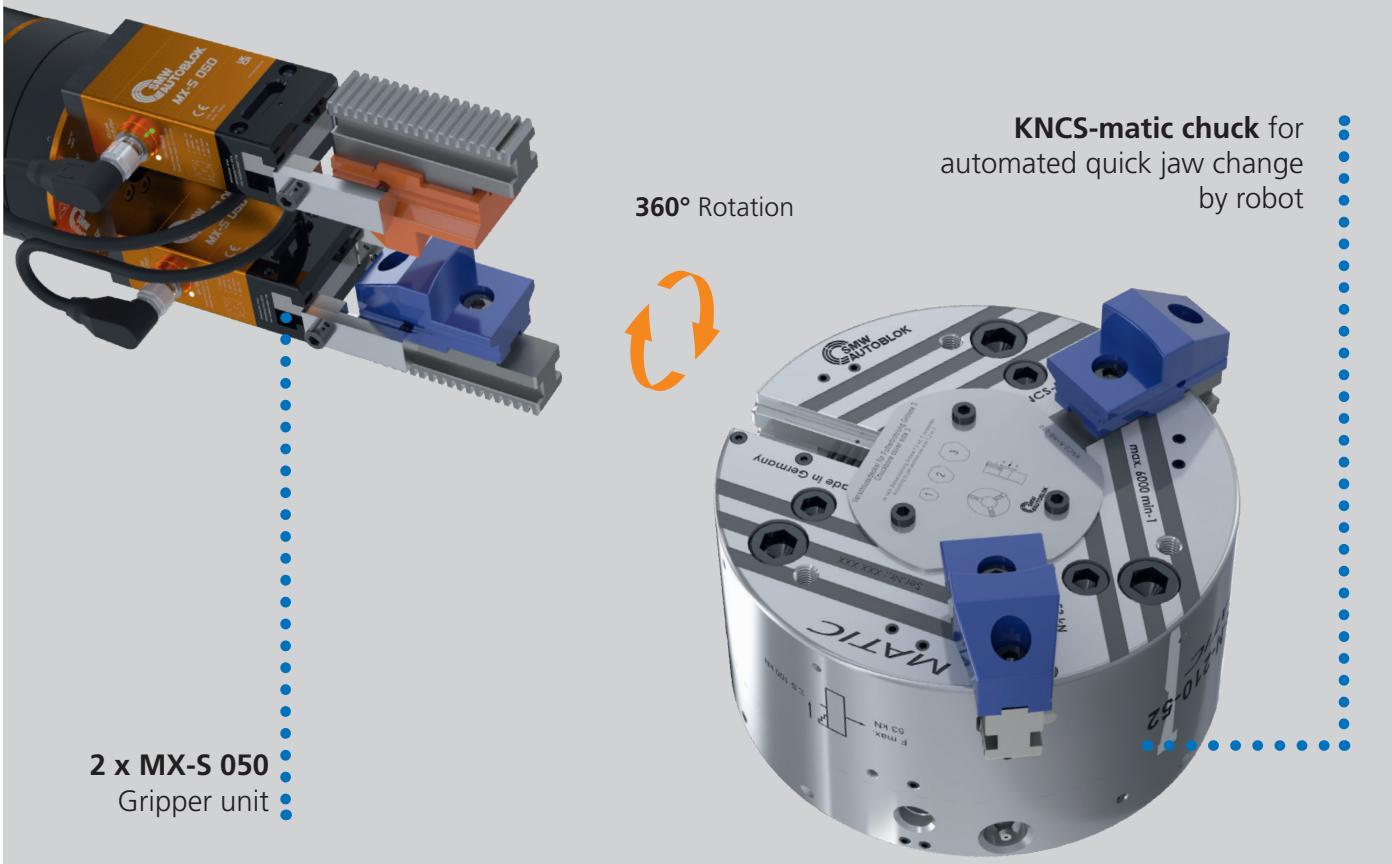


Application examples

Greifer-Kit MX-S 050 with UR

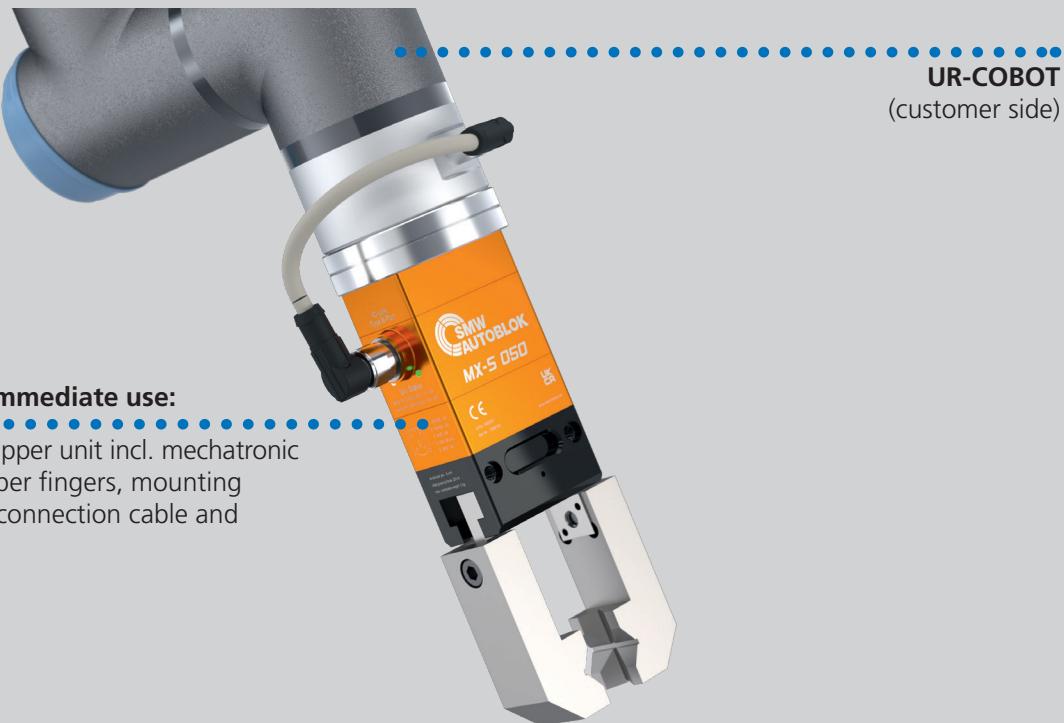

Ready for immediate use:

Complete gripper unit incl. mechatronic gripper, gripper fingers, mounting accessories, connection cable and URCap.

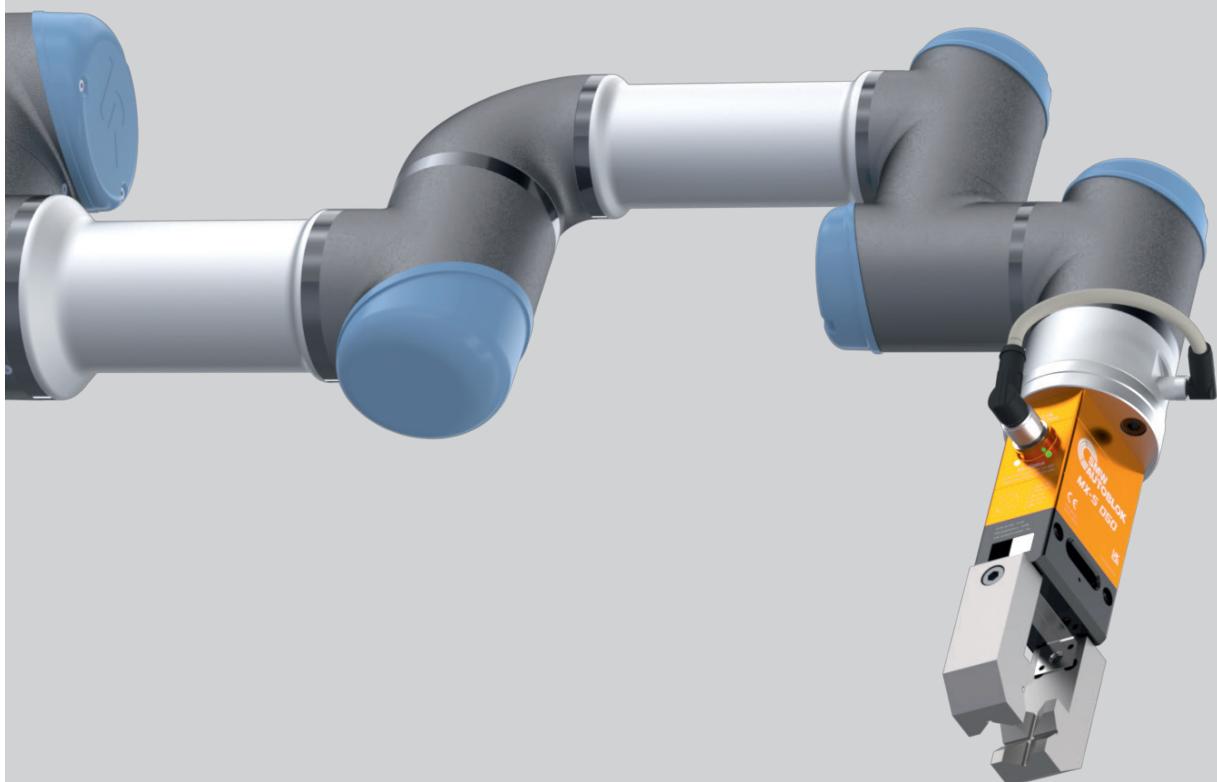

Gripper kits for other manufacturers available on request.

**Germany**

SMW-AUTOBLOK Spannsysteme GmbH
Wiesentalstraße 28 • D-88074 Meckenbeuren
SMW-electronics GmbH
Wiesentalstraße 19 • D-88074 Meckenbeuren
Tel.: +49 (0) 7542 - 405 - 0
Fax: +49 (0) 7542 - 405 - 171
E-mail ► info@smw-autoblok.de
E-mail ► info@smw-electronics.de

**Italy**

AUTOBLOK s.p.a.
Via Duca D'Aosta n.24
Fraz. Novaretto
I-10040 Caprie - Torino
Tel. +39 011 - 9638411
Tel. +39 011 - 9632020
Fax +39 011 - 9632288
E-mail ► info@smwautoblok.it

**U.S.A.**

SMW-AUTOBLOK Corporation
285 Egidi Drive - Wheeling, IL 60090
Tel. +1 847 - 215 - 0591
Fax +1 847 - 215 - 0594
E-mail ► autoblok@smwautoblok.com

**France**

SMW-AUTOBLOK
17, Avenue des Frères Montgolfier - Z.I. Mi-Plaine
F-69680 Chassieu
Tel. +33 (0) 4.72.79.18.18
Fax +33 (0) 4.72.79.18.19
E-mail ► autoblok@smwautoblok.fr

**Japan**

SMW-AUTOBLOK Japan Inc.
1-56 Hira, Nishi-Ku
Nagoya
Tel. +81 (0) 52 - 504 - 0203
Fax +81 (0) 52 - 504 - 0205
E-mail ► infosaj@smwautoblok.co.jp

**Great Britain**

SMW-AUTOBLOK Telbrook Ltd.
7 Wilford Industrial Estate
Ruddington Lane, Wilford
GB-Nottingham, NG11 7EP
Tel. +44 (0) 115 - 982 1133
E-mail ► info@smw-autoblok-telbrook.co.uk

**China**

SMW-AUTOBLOK (Shanghai) Work Holding Co.,Ltd.
2dn Floor, Building 1, No.141, Xuanchung Road
Xuangiao Town, Pudong District
201399, Shanghai P.R. China
Tel. +86 21 - 5810 - 6396
Fax +86 21 - 5810 - 6395
E-mail ► china@smwautoblok.cn

**Spain**

SMW-AUTOBLOK IBERICA, S.L.
Ursalto 4 – Pab. 9-10 Pol. 27
20014 Donostia - San Sebastián (Gipuzkoa)
Tel.: +34 943 - 225 079
Fax: +34 943 - 225 074
E-mail ► info@smwautoblok.es

**Mexico**

SMW-AUTOBLOK Mexico, S.A. de C.V.
Acceso III No. 16 Int. 9,
Condominio Quadrum
Industrial Benito Juarez
Queretaro, Qro. C.P. 76120
Tel. +52 (442) 209 - 5118
Fax +52 (442) 209 - 5121
E-mail ► smwmex@smwautoblok.mx

**Canada**

SMW AUTOBLOK CANADA CORP
1460 The Queensway - Suite 219
Etobicoke, ON M8Z 1S7
Tel. +1 416 - 316 - 3839
E-mail ► info@smwautoblok.ca

**India**

SMW-AUTOBLOK Workholding Pvt. Ltd.,
Plot No. 4, Weikfield Industrial Estate,
Gat No. 1251, Sanaswadi, Tal - Shirur,
Dist – Pune. 412 208
Tel. +91 2137 - 616 974
E-mail ► info@smwautoblok.in

**Taiwan**

AUTOBLOK Company Ltd.
No.6, Shuiy Rd., South Dist.,
Taichung, Taiwan
Tel. +886 4-226 10826
Fax +886 4-226 12109
E-mail ► taiwan@smwautoblok.tw

**Turkey**

SMW AUTOBLOK Makina San. Ve Tic. Ltd. Sti.
Yenisehir Mah, Osmanli Bly, Volume Kurtkoy Ofis
No:9, Kat:2, D:30, 34912, Pendik, Istanbul
Tel. +90 216 629 20 19
E-mail ► info@smwautoblok.com.tr

**Czech Republic / Slovakia**

SMW-AUTOBLOK s.r.o.
Merhautova 20
CZ - 613 00 Brno
Tel. +420 513 034 157
E-mail ► info@smw-autoblok.cz

**Sweden / Norway**

SMW-AUTOBLOK Scandinavia AB
Kommendörsgatan 3
281 35 Hässleholm
Tel. +46 (0) 761 420 111
E-mail ► info@smw-autoblok.se

**Poland**

SMW-AUTOBLOK Poland Sp. z.o.o
OGRODNICZA 12
95 - 100 ZGIERZ
Tel. +48 736 059 699
E-mail ► info@smwautoblok.pl

**Korea**

SMW-AUTOBLOK KOREA CO., LTD.
1502-ho, Charyong-ro 48beon-gil,
Uichang-gu, Changwon-si
Gyeongsangnam-do, 51391, Republic of Korea
Tel. +82 55 264 9505
E-mail ► info-korea@smw-autoblok.net